


Pressure Relief Valve, Poppet Type, Direct Acting

SR1A-A2

3/4-16 UNF • Q_{max} 30 l/min (8 GPM) • p_{max} 350 bar (5100 PSI)

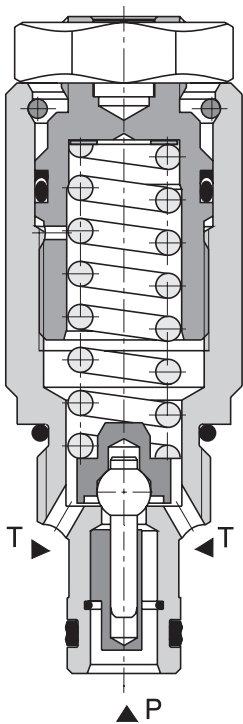

Technical Features

- › Excellent stability throughout flow range with rapid response to dynamic pressure changes
- › Low hysteresis, accurate pressure control and low pressure drop through CFD optimized flow paths
- › Wide pressure range up to 350 bar
- › Hardened precision parts
- › Sharp-edged steel seats for dirt-tolerant performance
- › Leak-free closing, suitable for fast cycling with long life
- › Adjustable by allen key or hand screw
- › In the standard version, the valve is zinc-coated for 240 h protection acc. to ISO 9227

Functional Description

A poppet type, direct acting hydraulic relief valve in the form of a screw-in cartridge intended for use as a pressure limiting device for common hydraulic circuit protection. The spring acts on the poppet and presses it onto the valve seat. If the hydraulic pressure is below the pre-set value, the valve is closed. If the hydraulic force exceeds the pre-set value the valve opens and flow passes to the tank port until the system pressure falls below the spring pre-set value and the valve closes again.




Technical Data

Valve size / Cartridge cavity		3/4-16 UNF-2A / A2 (C-8-2)	
Max. flow	l/min (GPM)	30 (7.9)	
Max. operating pressure	bar (PSI)	350 (5080)	
Max. pressure (port T)	bar (PSI)	160 (2320)	
Fluid temperature range (NBR)	°C (°F)	-30 ... +100 (-22 ... 212)	
Fluid temperature range (FPM)	°C (°F)	-20 ... +120 (-4 ... 248)	
Weight	kg (lbs)	0.13 (0.29)	
		Datasheet	Type
General information		GI_0060	Products and operating conditions
Valve bodies	In-line mounted	SB_0018	SB-A2*
	Sandwich mounted	SB-04(06)_0028	SB-*A2*
Cavity details / Form tools		SMT_0019	SMT-A2*
Spare parts		SP_8010	

Characteristics measured at $v = 32 \text{ mm}^2/\text{s}$ (156 SUS)

Relief pressure related to flow rate

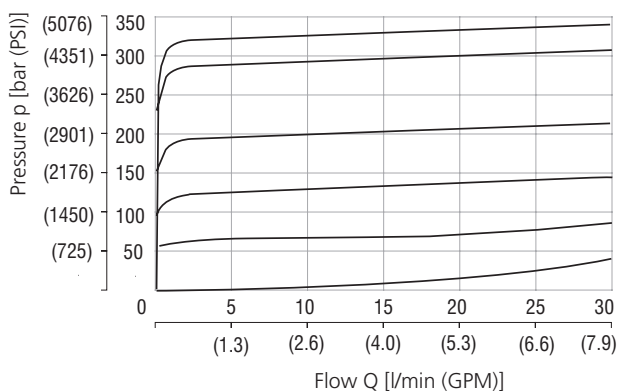


	Pressure range
6	35
5	25
4	16
3	10
2	6
1	Min. pressure setting

Dimensions in millimeters (inches)


Model S

Model T

Model L

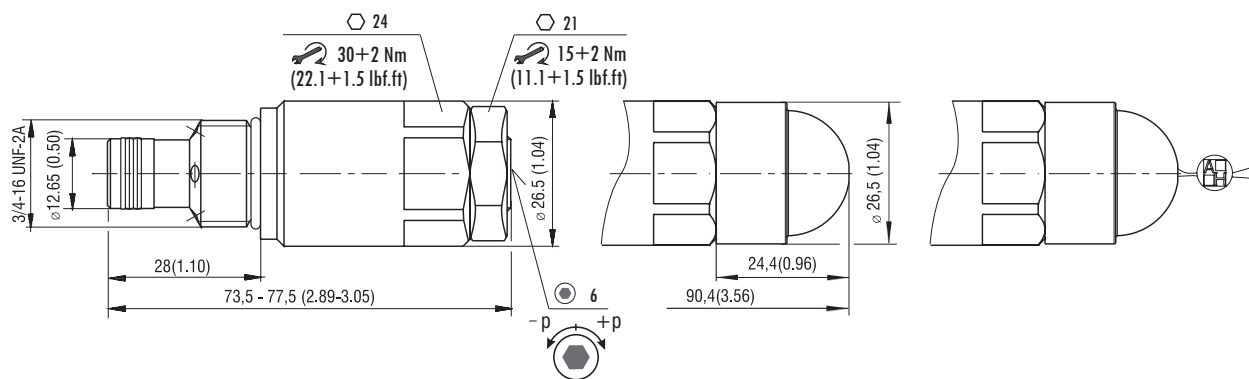

Model RS



Ordering Code

SR1A-A2 / L [] [] [] - []

Pressure relief valve, poppet type, direct acting

Valve cavity
3/4-16 UNF (C-8-2)

Model
Lightline

Pressure range
up to 63 bar (914 PSI)
up to 100 bar (1450 PSI)
up to 160 bar (2320 PSI)
up to 250 bar (3630 PSI)
up to 350 bar (5080 PSI)


6
10
16
25
35

Surface treatment
A zinc-coated (ZnCr-3), ISO 9227 (240 h)
B zinc-coated (ZnNi), ISO 9227 (520 h)

Seals
No designation
V NBR
FPM (Viton)

Adjustment option
S allen key (hex. 6), without protective cap
T allen key (hex. 6), with protective cap
L allen key (hex. 6), with protective cap, sealable (lockwire holes)
RS hand screw, metal


SR1A-B2

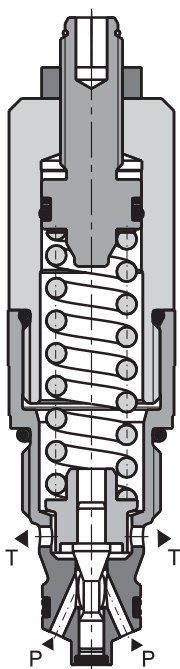 7/8-14 UNF • Q_{max} 60 l/min (16 GPM) • p_{max} 420 bar (6100 PSI)

Technical Features

- › Excellent stability throughout flow range with rapid response to dynamic pressure changes
- › Low hysteresis, accurate pressure control and low pressure drop through CFD optimized flow paths
- › Wide pressure range up to 420 bar
- › Hardened precision parts
- › Sharp-edged steel seats for dirt-tolerant performance
- › Leak-free closing, suitable for fast cycling with long life
- › Adjustable by allen key or hand screw
- › In the standard version, the valve is zinc-coated for 520 h protection acc. to ISO 9227

Functional Description

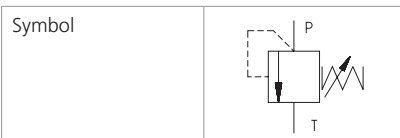
A poppet type, direct acting hydraulic relief valve in the form of a screw-in cartridge intended for use as a pressure limiting device for common hydraulic circuit protection. The spring acts on the poppet and presses it onto the valve seat. If the hydraulic pressure is below the pre-set value, the valve is closed. If the hydraulic force exceeds the pre-set value the valve opens and flow passes to the tank port until the system pressure falls below the spring pre-set value and the valve closes again.


Technical Data

Valve size / Cartridge cavity		7/8-14 UNF-2A / B2 (C-10-2)
Max. flow	l/min (GPM)	60 (15.9)
Max. operating pressure	bar (PSI)	420 (6090)
Max. pressure (port T)	bar (PSI)	250 (3630)
Fluid temperature range (NBR)	°C (°F)	-30 ... +100 (-22 ... 212)
Fluid temperature range (FPM)	°C (°F)	-20 ... +120 (-4 ... 248)
Weight	kg (lbs)	0.25 (0.55)

		Datasheet	Type
General information		GI_0060	Products operating conditions
Valve bodies	In-line mounted	SB_0018	SB-B2*
	Sandwich mounted	SB-04(06)_0028	SB-*B2*
Cavity details / Form tools		SMT_0019	SMT-B2*
Spare parts		SP_8010	


Characteristics measured at $v = 32 \text{ mm}^2/\text{s}$ (156 SUS)

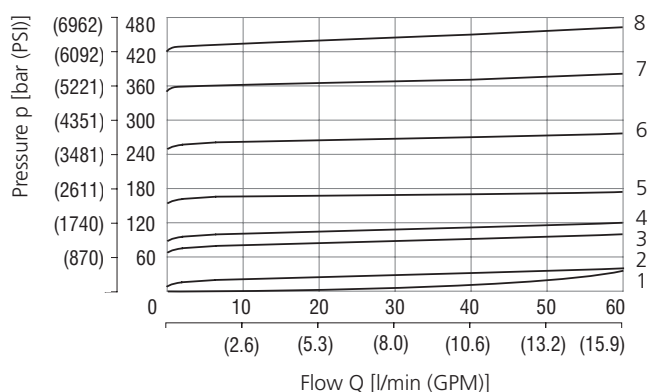Relief pressure related to flow rate



	Pressure range
8	42
7	35
6	25
5	16
4	10
3	6
2	2
1	Min. pressure setting

Dimensions in millimeters (inches)


Model S

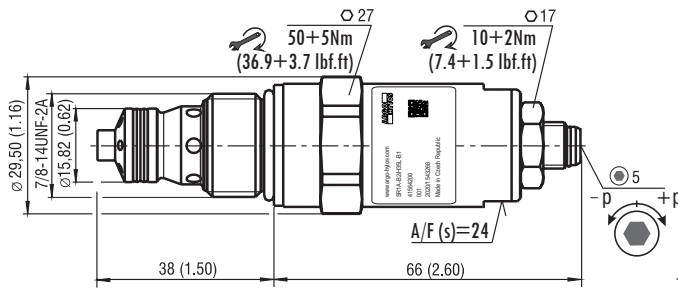


Model T



Model RP



Model L



Ordering Code

SR1A - B2 / H - B1

Pressure relief valve, poppet type, direct acting

Valve cavity
7/8-14 UNF (C-10-2)

Model
High performance

Pressure range

adjustable pressure 25 bar (360 PSI)	2
adjustable pressure 63 bar (910 PSI)	6
adjustable pressure 100 bar (1450 PSI)	10
adjustable pressure 160 bar (2320 PSI)	16
adjustable pressure 250 bar (3630 PSI)	25
adjustable pressure 350 bar (5080 PSI)	35
adjustable pressure 420 bar (6090 PSI)	42


Surface treatment
zinc-coated (ZnNi), ISO 9227 (520 h)

No designation
V

Seals
NBR
FPM (Viton)

S
T
RP
L

Adjustment option
allen key (hex. 5), without protective cap
allen key (hex. 5), with protective cap
hand screw, plastic
allen key (hex. 5), with protective cap, sealable (lockwire holes)

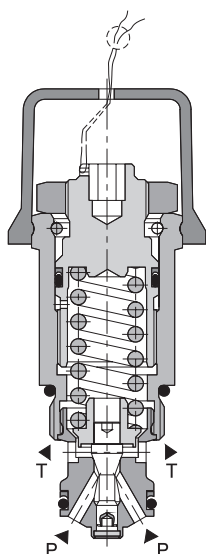


Technical Features

- › Excellent stability throughout flow range with rapid response to dynamic pressure changes
- › Low hysteresis, accurate pressure control and low pressure drop
- › Wide pressure range up to 320 bar
- › Hardened precision parts
- › Sharp-edged steel seats for dirt-tolerant performance
- › Leak-free closing, suitable for fast cycling with long life
- › Adjustable by allen key or hand screw
- › In the standard version, the valve is zinc-coated for 240 h protection acc. to ISO 9227

Functional Description

A poppet type, direct acting hydraulic relief valve in the form of a screw-in cartridge intended for use as a pressure limiting device for common hydraulic circuit protection. The spring acts on the poppet and presses it onto the valve seat. If the hydraulic pressure is below the pre-set value, the valve is closed. If the hydraulic force exceeds the pre-set value the valve opens and flow passes to the tank port until the system pressure falls below the spring pre-set value and the valve closes again.

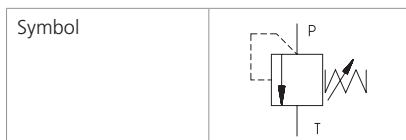


Technical Data

Valve size / Cartridge cavity		M22x1.5 / QG2
Max. flow	l/min (GPM)	40 (10.6)
Max. operating pressure	bar (PSI)	320 (4640)
Fluid temperature range (NBR)	°C (°F)	-30 ... +100 (-22 ... 212)
Fluid temperature range (FPM)	°C (°F)	-20 ... +120 (-4 ... 248)
Mass	kg (lbs)	0.17 (0.37)

	Datasheet	Type
General information	GI_0060	Products and operating conditions
Valve bodies	In-line mounted	SB-QG2*
	Sandwich mounted	SB-*QG2*
Cavity details	SMT_0019	SMT-QG2*
Spare parts	SP_8010	SMT-B2*

Characteristics measured at $v = 32 \text{ mm}^2/\text{s}$ (156 SUS)

Relief pressure related to flow rate

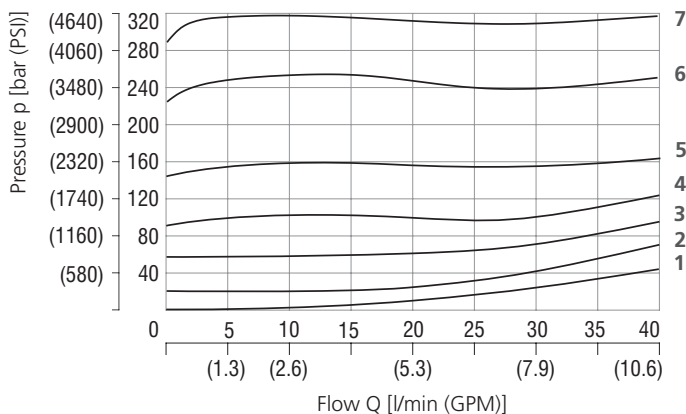

	Pressure range
7	32
6	25
5	16
4	10
3	6
2	2
1	Min. pressure setting


Dimensions in millimeters (inches)

Model S

Model T

Model RS

Model L

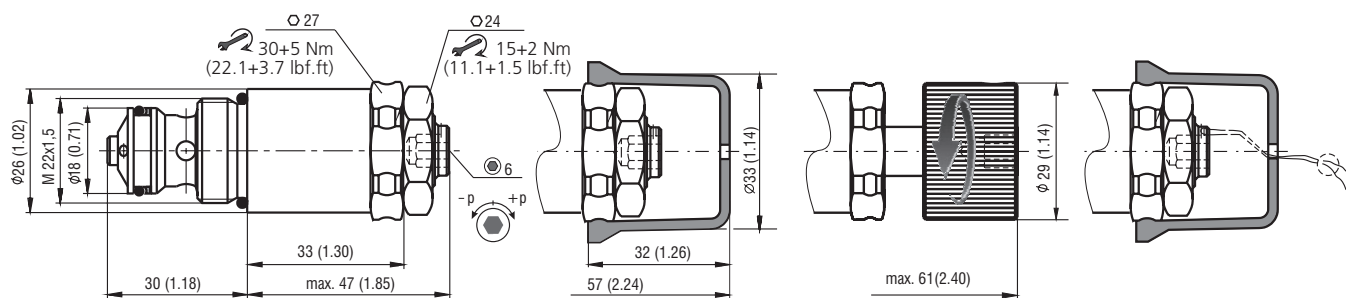

Ordering Code

VPP2-04 / S

Pressure relief valve, poppet type,
direct acting M22x1.5

Model screw-in cartridge S

Pressure range	
up to 25 bar (360 PSI)	2
up to 63 bar (910 PSI)	6
up to 100 bar (1450 PSI)	10
up to 160 bar (2320 PSI)	16
up to 250 bar (3630 PSI)	25
up to 320 bar (4600 PSI)	32

-

Surface treatment
A zinc-coated (ZnCr-3), ISO 9227 (240 h)
B zinc-coated (ZnNi), ISO 9227 (520 h)


No designation V
Seals
NBR
FPM (Viton)

Adjustment option
S allen key (hex. 6), without protective cap
T allen key (hex. 6), with protective cap
RS hand screw, metal
L allen key (hex. 6), with protective cap, sealable (lockwire holes)

Pressure Relief Valve, Poppet-Type, Direct-Acting

VPP2-06

M28x1.5 • Q_{max} 50 l/min (13 GPM) • p_{max} 320 bar (4600 PSI)

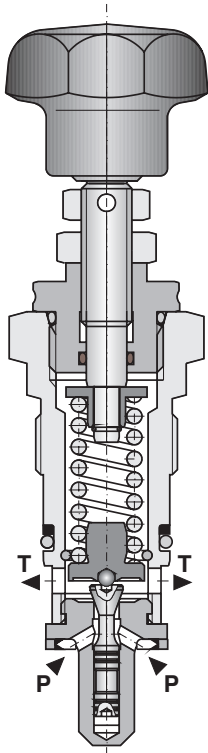


Technical Features

- › Excellent stability throughout flow range with rapid response to dynamic pressure changes
- › Low hysteresis, accurate pressure control and low pressure drop
- › Wide pressure range up to 320 bar
- › Hardened precision parts
- › Sharp-edged steel seats for dirt-tolerant performance
- › Leak-free closing, suitable for fast cycling with long life
- › Adjustable by allen key or hand screw
- › In the standard version, the valve is black oxide coated

Functional Description

A poppet-type, direct-acting hydraulic relief valve in the form of a screw-in cartridge intended for use as a pressure limiting device for common hydraulic circuit protection. The spring acts on the poppet and presses it onto the valve seat. If the hydraulic pressure is below the pre-set value, the valve is closed. If the hydraulic force exceeds the pre-set value the valve opens and flow passes to the tank port until the system pressure falls below the spring pre-set value and the valve closes again.

Symbol



Technical Data


Valve size / Cartridge cavity		M28x1.5 / QP2
Max. flow	l/min (GPM)	50 (13.2)
Max. operating pressure	bar (PSI)	320 (4640)
Fluid temperature range (NBR)	°C (°F)	-30...+100 (-22 ...212)
Fluid temperature range (FPM)	°C (°F)	-20 ... +120 (-4 ... +248)
Mass	kg (lbs)	0.4 (0.88)

General information		Datasheet	Type
Valve bodies	In-line mounted	GI_0060	Products and operating conditions
Cavity details		SMT_0019	SB-QP2*
Spare parts		SP_8010	SMT-QP2*


Characteristics measured at $v = 32 \text{ mm}^2/\text{s}$ (156 SUS)

Relief pressure related to flow rate


Pressure range 2.5

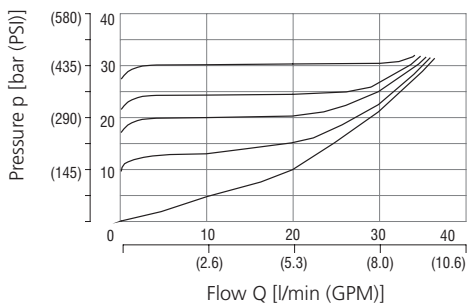


Pressure range 6.3

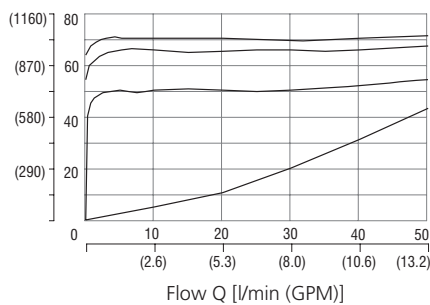


Pressure range 10

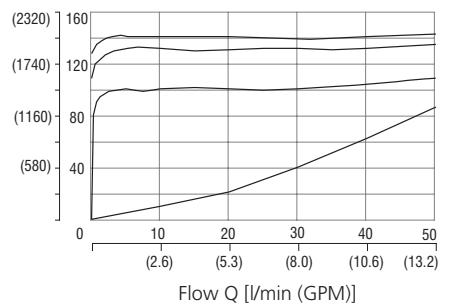


Pressure range 16

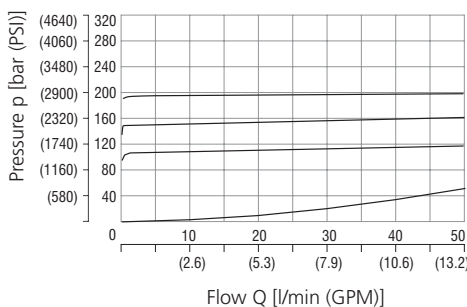

Pressure range 25

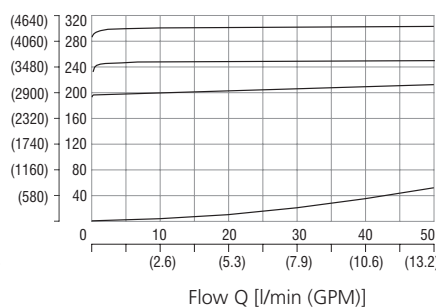


Pressure range 32

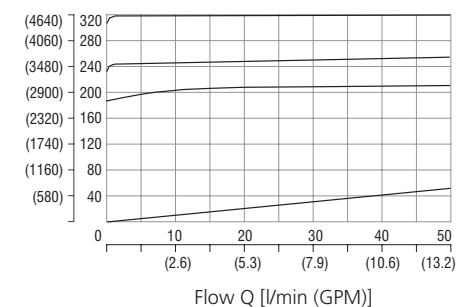


Dimensions in millimeters (inches)


Model S

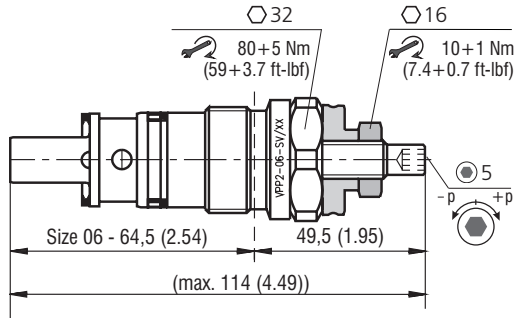


Model T




Model RP



Model O

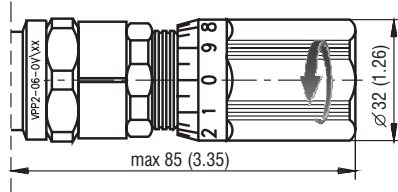


Model Z

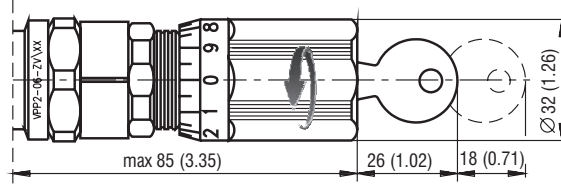


Dimensions in millimeters (inches)

Cartridge in threaded housing - models „M“ and „G“

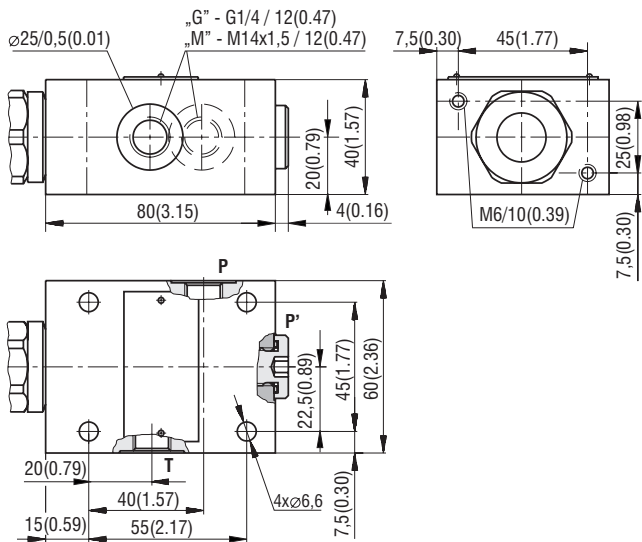

Cartridge in subplate mounted housing - model „P“

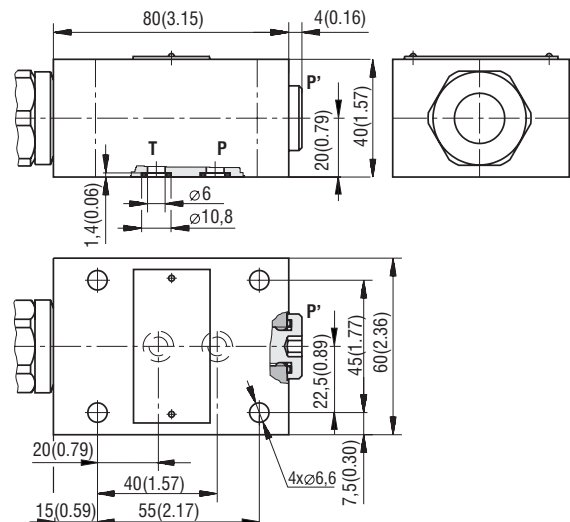

Port P' (either P or P' can be used as input port), thread G1/4 (M14x1.5), depth 12 mm (0.47 in)

Port P' (e.g. for pressure measuring), thread M14x1.5, depth 12 mm (0.47 in)
Note: subplates - see catalog HA 0002

Ordering Code

VPP2-06 - [] [] / [] [] - []

Pressure relief valve, poppet-type, direct-acting
M28x1.5

Adjustment option
allen key (hex. 5), without protective cap
allen key (hex. 5), with protective cap
hand screw, plastic
non-lockable cylindrical hand screw
lockable cylindrical hand screw

Model
screw-in cartridge
cartridge in threaded housing - metric threads
cartridge in threaded housing - with BSP threads
cartridge in subplate mounted housing

S
T
RP
O
Z

V
M
G
P

Surface treatment (cartridge valve only)
No designation black oxide coating
A zinc-coated (ZnCr-3), ISO 9227 (240 h)
B zinc-coated (ZnNi), ISO 9227 (520 h)

No designation
V


Seals
NBR
FPM (Viton)

Pressure range
2.5 up to 25 bar (360 PSI)
6.3 up to 63 bar (910 PSI)
10 up to 100 bar (1450 PSI)
16 up to 160 bar (2320 PSI)
25 up to 250 bar (3630 PSI)
32 up to 320 bar (4600 PSI)

Pressure Relief Valve, Poppet Type, Direct Acting

VPP1-06(10)

M28x1.5 / M35x1.5 • Q_{max} 50 l/min (13 GPM) / 120 l/min (32 GPM) • p_{max} 320 bar (4600 PSI)

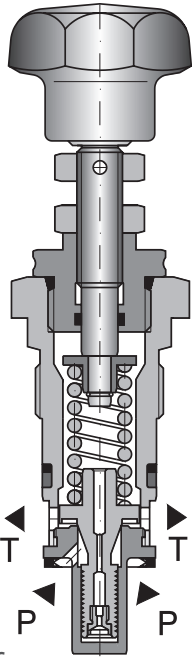

Size 06



Size 10

Technical Features

- › Excellent stability throughout flow range with rapid response to dynamic pressure changes
- › Low hysteresis, accurate pressure control and low pressure drop
- › Wide pressure range up to 320 bar
- › Hardened precision parts
- › Sharp-edged steel seats for dirt-tolerant performance
- › Leak-free closing, suitable for fast cycling with long life
- › Adjustable by allen key or hand screw
- › In the standard version, the cartridge valve is black oxide coated and the valve body is phosphated

Functional Description

A poppet type, direct acting hydraulic relief valve in the form of a screw-in cartridge intended for use as a pressure limiting device for common hydraulic circuit protection. The spring acts on the poppet and presses it onto the valve seat. If the hydraulic pressure is below the pre-set value, the valve is closed. If the hydraulic force exceeds the pre-set value the valve opens and flow passes to the tank port until the system pressure falls below the spring pre-set value and the valve closes again.




Technical Data

Valve size		size 06	size 10
Valve size / Cartridge cavity		M28x1.5 / QP2	M35x1.5 / QT2
Max. flow	l/min (GPM)	50 (13.2)	120 (31.7)
Max. operating pressure	bar (PSI)	320 (4640)	
Fluid temperature range (NBR)	°C (°F)	-30...+100 (-22 ...212)	
Fluid temperature range (FPM)	°C (°F)	-20...+120 (-4...248)	
Weight	kg (lbs)	0.4 (0.88)	0.5 (1.10)
		Datasheet	Type
General information		GI_0060	Products and operating conditions
Valve bodies	In-line mounted	SB_0018	SB-QP2* SB-QT2*
Cavity details		SMT_0019	SMT-QP2* SMT-QT2*
Spare parts		SP_8010	

Characteristics measured at v = 32 mm²/s (156 SUS)


Relief pressure related to flow rate

Size 06

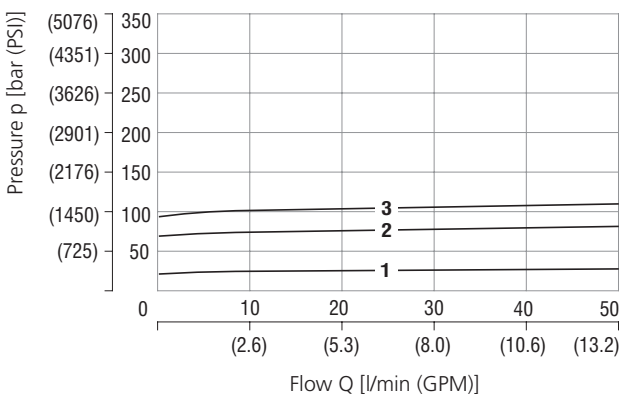


	Pressure range
3	10
2	6.3
1	2.5

Size 10

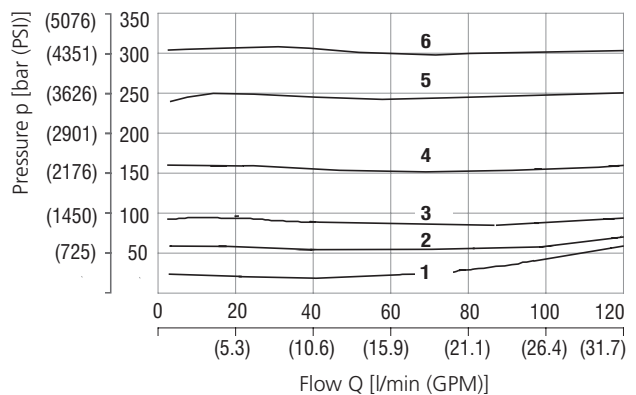


	Pressure range
6	32
5	25
4	16
3	10
2	6.3
1	2.5

Dimensions in millimeters (inches)

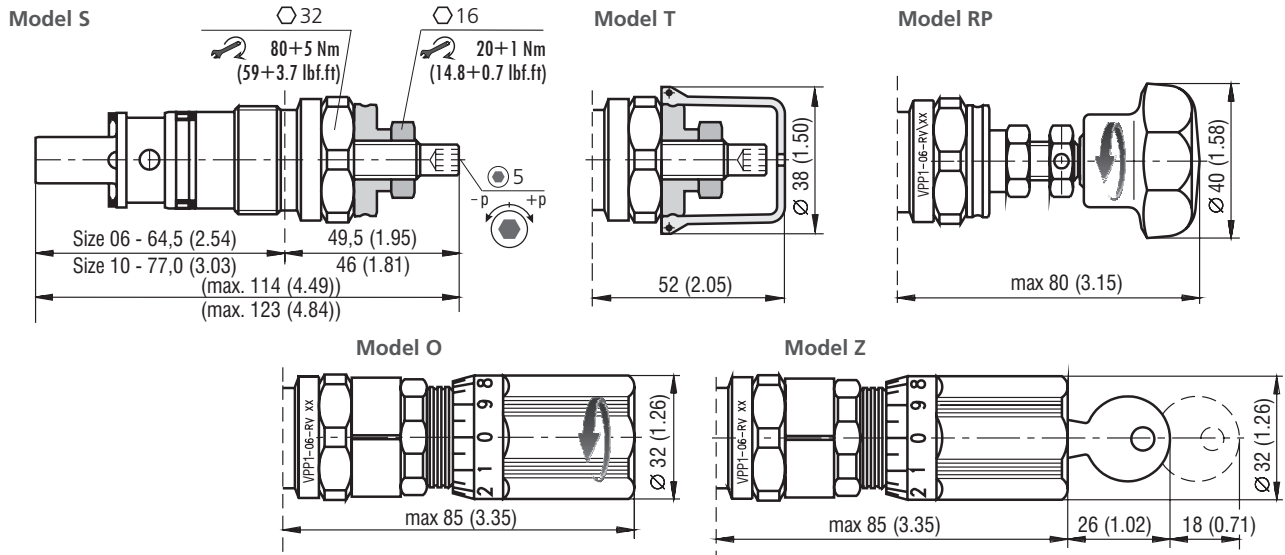

Dimensions in millimeters (inches)

Cartridge in threaded housing - models „M“, „G“ and „P“

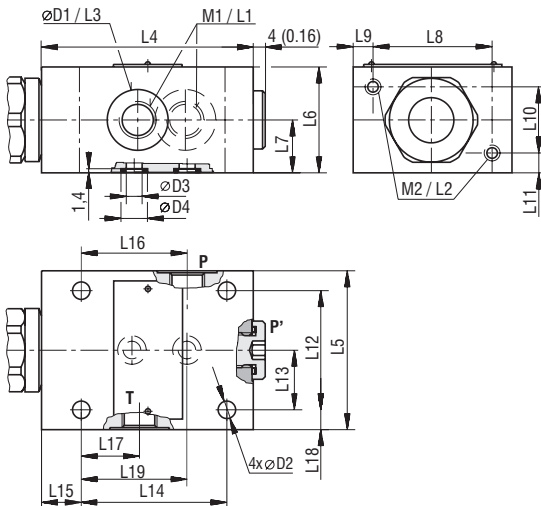

Port P' (as input can be used P or P') thread M1/L1

Model	06-xM/x	06-xG/x	06-xP/x	10-xM/x	10-xG/x	10-xP/x
M1	M14x1.5	G1/4	G1/4	M22x1.5	G1/2	G1/4
M2	M6			M8		
ØD1	25(0.98)			34(1.34)		
ØD2	6.6(0.26)			9(0.35)		
ØD3			6(0.24)			10(0.39)
ØD4			10.8(0.43)			15.6(0.61)
L1	12(0.47)			16(0.63)		
L2	10(0.39)			20(0.79)		
L3	0.5(0.02)			0.5(0.02)		
L4	80(3.15)			100(3.94)		
L5	60(2.36)			80(3.15)		
L6	40(1.57)			60(2.36)		
L7	20(0.79)			30(1.18)		
L8	45(1.77)			60(2.36)		
L9	7.5(0.30)			10(0.39)		
L10	25(0.98)			40(1.57)		
L11	7.5(0.30)			10(0.39)		
L12	45(1.77)			60(2.36)		
L13	22.5(0.89)			30(1.18)		
L14	55(2.17)			70(2.76)		
L15	15(0.59)			20(0.79)		
L16	40(1.57)			49(1.93)		
L17	20(0.79)			21(0.83)		
L18	7.5(0.30)			10(0.39)		
L19			40(1.57)			45(1.77)

Ordering Code

VPP1- [] - [] / [] - []

Pressure relief valve, poppet type, direct acting M28x1.5 / M35x1.5

Nominal size
size 06 **06***
size 10 **10**

* VPP1-06 only available for pressure range 2.5; 6.3 and 10

Adjustment option
allen key (hex. 5), without protective cap
allen key (hex. 5), with protective cap
hand screw, plastic
non-lockable cylindrical hand screw
lockable cylindrical hand screw



Model
screw-in cartridge **V**
cartridge in threaded housing - with metric threads **M**
cartridge in threaded housing - with BSP threads **G**
cartridge in subplate mounted housing **P**

Surface treatment (cartridge valve only)
No designation black oxide coating
A zinc-coated (ZnCr-3), ISO 9227 (240 h)
B zinc-coated (ZnNi), ISO 9227 (520 h)

Seals
No designation NBR
V FPM (Viton)

Pressure range
2.5 up to 25 bar (360 PSI)
6.3 up to 63 bar (910 PSI)
10 up to 100 bar (1450 PSI)
16 up to 160 bar (2320 PSI)
25 up to 250 bar (3630 PSI)
32 up to 320 bar (4600 PSI)

VPP-R-16

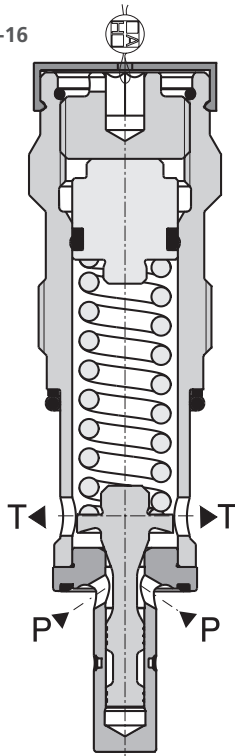

Technical Features

- › Pressure relief valve, direct-acting, intended for installation in a manifold
- › Wide pressure range up to 350 bar
- › Large flow range
- › Low hysteresis, accurate pressure control and low pressure drop
- › Hardened precision parts
- › Leak-free closing, suitable for fast cycling with long life
- › Adjustment option with sealable allen head and a protective cap
- › In the standard version, the valve is zinc coated for 240 h (for size 25) and 520 h (for size 16) protection acc. to ISO 9227

Functional Description


A poppet type, direct acting hydraulic relief valve in the form of a screw-in cartridge intended for use as a pressure limiting device for common hydraulic circuit protection. The spring acts on the poppet and presses it onto the valve seat. If the hydraulic pressure is below the pre-set value, the valve is closed. If the hydraulic force exceeds the pre-set value the valve opens and flow passes to the tank port until the system pressure falls below the spring pre-set value and the valve closes again.

Technical Data


Valve size		Size 16	Size 25
Connection thread		M36x2	M42x2
Max. flow	l/min (GPM)	120 (31.7)	400 (106)
Max. inlet pressure (port P)	bar (PSI)	350 (5080)	
Max. outlet pressure (port T)	bar (PSI)	160 (2320)	
Fluid temperature range (NBR)	°C (°F)	-30 ... +100 (-22 ... 212)	
Fluid temperature range (FPM)	°C (°F)	-20 ... +120 (-4 ... 248)	
Kinematic viscosity range	mm ² /s (SUS)	10 ... 500 (49 ... 2450)	
Weight	valve	0.56 (1.23)	1.03 (2.27)
	valve with body	3.06 (6.75)	5.5 (12.1)
		Datasheet	Type
General information	GI_0060	Products and operating conditions	
Spare parts	SP_8010		

Characteristics measured at v = 32 mm²/s (156 SUS)

Relief pressure related to flow rate

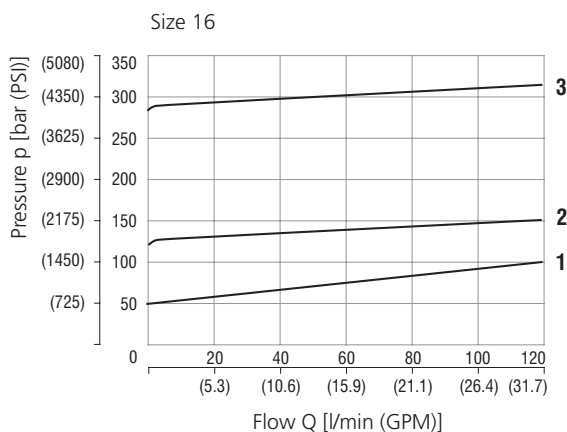


	Pressure stage	Pressure range bar (PSI)
3	28	280 - 350 (4060 - 5080 PSI)
2	13	130 - 280 (1890 - 4060 PSI)
1	5	50 - 130 (730 - 1890 PSI)

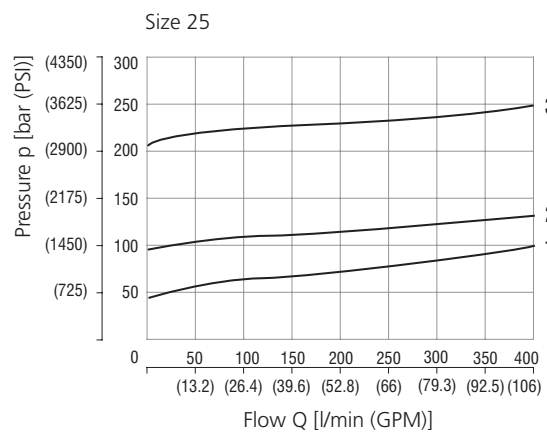

	Pressure stage	Pressure range bar (PSI)
3	20	200 - 350 (2900 - 5080 PSI)
2	10	100 - 200 (1450 - 2900 PSI)
1	5	50 - 100 (730 - 1450 PSI)

Cavity dimensions in millimeters (inches)

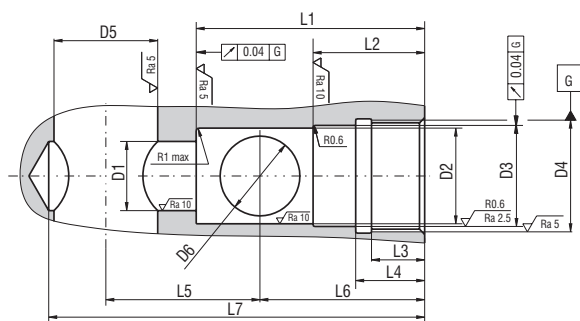


Size	Ø D1	Ø D2	Ø D3	Ø D4	Ø D5	Ø D6	Dimensions in mm (in)
16	20 H14 (0.79)	30 H11 (1.18)	32.6 H10 (1.28)	M36x2-7H	30 (1.18)	25 (0.98)	
25	26 H14 (1.02)	36 H11 (1.42)	38 H10 (1.50)	M42x2-7H	34 (1.34)	31 (1.22)	
Size	L1	L2	L3	L4	L5	L6	L7
16	66 (2.6 / 2.61)	31 (1.22 / 1.22)	18 (0.71 / 0.73)	21 (0.83 / 0.85)	46 (1.81)	44 (1.73 / 1.75)	105 (4.13)
25	86 (3.4)	44 (1.73)	20 (0.79)	26 (1.02)	58 (2.29)	62 (2.44)	135 (5.32)

Dimensions in millimeters (inches)


VPP-R-16

1:1

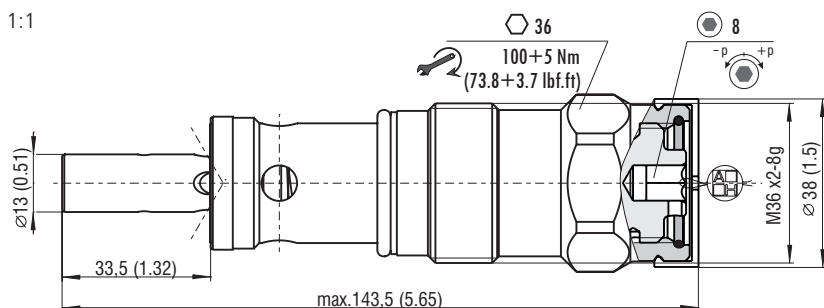

VPPB-R

1:2

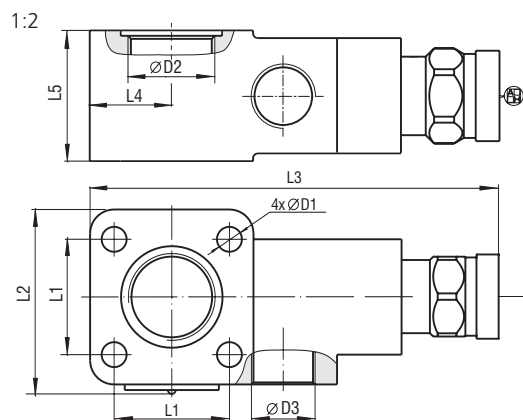

Size	Ø D1	Ø D2	Ø D3	L1	L2	L3	L4	L5
16	10.5 (0.41)	M33x2	M27x2	48 (1.89)	66 (2.60)	168 (6.61)	33 (1.30)	57 (2.24)
25	13 (0.51)	M42x2	M33x2	60 (2.36)	85 (3.35)	218 (8.58)	42.5 (1.67)	68 (2.68)

Ordering Code

VPP [] -R- [] - [] - [] - [] - []

Pressure relief valve, poppet type, direct acting

Design of valve
screw-in cartridge valve with a body

no designation B

Valve size
size 16
size 25

16
25

Range of adjustable pressure - pressure stage size 16

50 - 130 bar (730 - 1890 PSI)
130 - 280 bar (1890 - 4060 PSI)
280 - 350 bar (4060 - 5080 PSI)

5
13
28

Range of adjustable pressure - pressure stage size 25

50 - 100 bar (730 - 1450 PSI)
100 - 200 bar (1450 - 2900 PSI)
200 - 350 bar (2900 - 5080 PSI)


5
10
20

Surface treatment
A zinc-coated (ZnCr-3), ISO 9227 (240 h) (only for size 25)
B zinc-coated (ZnNi), ISO 9227 (520 h) (only for size 16)

No designation V

Seals
NBR
FPM (Viton)

Adjustment option
S allen key (hex. 8), without protective cap
T allen key (hex. 8), with protective cap
L allen key (hex. 8), with protective cap, sealable (lockwire holes)

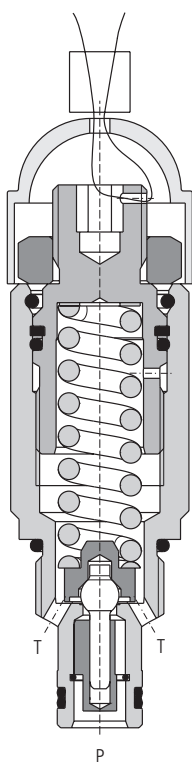

Technical Features

- › Hydraulic safety relief valve suitable for use as a safety device in Category IV Group 2 applications acc.to European Commission (EC) Pressure Equipment Directive (PED) 2014/68/EU
- › CE marked valves are supplied with "Declaration of Conformity", "Operating Instructions" and the list of residual risks
Always follow the operating instructions supplied with the valve!
- › Wide pressure range up to 350 bar
- › Hardened precision parts
- › Sharp-edged steel seats for dirt-tolerant performance
- › Leak-free closing and suitable for fast cycling with long life
- › Adjustable by allen key or hand screw
- › In the standard version, the valve is zinc-coated for 1000 h protection acc. to ISO 9227)


Functional Description

A poppet type, direct acting hydraulic relief valve in the form of a screw-in cartridge intended for use as a pressure limiting device for common hydraulic circuit protection. The spring acts on the poppet and presses it onto the valve seat. If the hydraulic pressure is below the pre-set value, the valve is closed. If the hydraulic force exceeds the pre-set value the valve opens and flow passes to tank port until the system pressure falls below the spring pre-set value and the valve closes back again.

Technical Data


Valve size / Cartridge cavity		3/4-16 UNF-2A / A2 (C-8-2)	
Max. flow	l/min (GPM)	30 (7.9)	
Max. operating pressure	bar (PSI)	350 (5080)	
Max. pressure (T port)	bar (PSI)	160 (2320)	
Fluid temperature range (NBR)	°C (°F)	-30 ... +100 (-22 ... 212)	
Fluid temperature range (FPM)	°C (°F)	-20 ... +120 (-4 ... 248)	
Max. leakage of closed valve at 80% cracking pressure	cm ³ /min	0.1	
Viscosity range	mm ² /s (SUS)	10 ... 500 (49 ... 2450)	
Weight	kg (lbs)	0.13 (0.29)	
		Datasheet	Type
General information		GI_0060	Products operating conditions
Valve bodies	In-line mounted	SB_0018	SB-A2*
	Sandwich mounted	SB-04(06)_0028	SB-*A2*
Cavity details / Form tools		SMT_0019	SMT-A2*
Spare parts		SP_8010	

Symbol



Characteristics measured at $v = 32 \text{ mm}^2/\text{s}$ (156 SUS)

Relief pressure related to flow rate

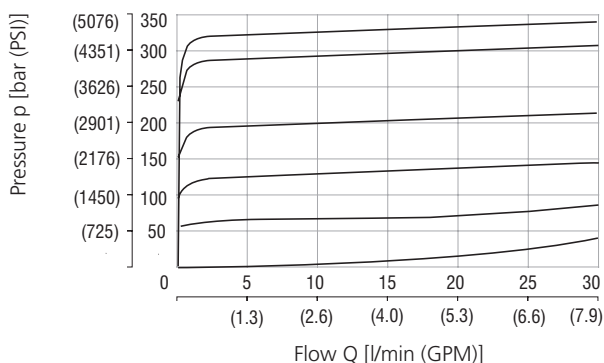

	Pressure range
6	35
5	25
4	16
3	10
2	6
1	Min. pressure setting

Valves Adjusted by the Manufacturer

- › The valves are adjusted for the specified pressure at the relevant flow rate and they are fitted with tamper-indicating seals
- › The pressure and flow rate values are indicated in the valve description on the product [pressure in bar, flow rate in l/min]
- › The seals bear the company logo

Valves NOT Adjusted by the Manufacturer

- › Valves have no tamper-indicating seals
- › No pressure and no flow rate indicated - SR1A-B2/HxxL-CE1017
- › After the completion of the functional test, the adjusting screw is completely loosened and the pressure is set to $p = 0$ bar
- › To adjust the required valve pressure proceed as follows:
 - turn the adjusting screw to the right (clockwise) to increase the pressure
 - turn the adjusting screw to the left (counter-clockwise) to decrease the pressure
- › The manufacturer accepts no responsibility for the adjustment, securing, and sealing of the valve

Residual Risks


Residual risks are listed and preventive measures against the occurrence of residual risk are described in the document „Operating instructions for pressure relief valve SR1A-A2/LxxL-CE1017“ which is delivered with each valve.

Application area

The diagram shows the operating region where the valve meets the requirements of Directive 2014/68/EU and Standard ISO 4126-1 on maximum short-time overshoot of system pressure by 10 % above the set cracking pressure when the valve opens.


The dynamics of the valve depend on the kinematic viscosity of working fluid.

Measurement conditions: oil Renolin VG 32, $T = 40$ °C (104 °F), $V = 0.5$ l (0.132 gal US)

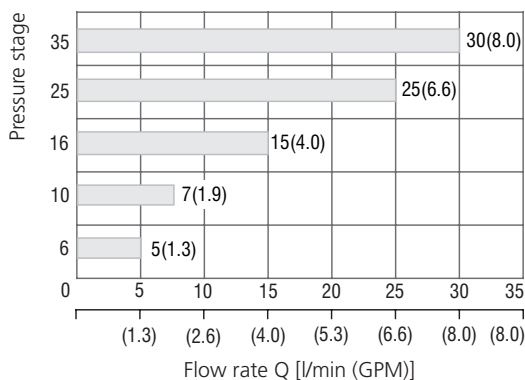

Application area characteristics from certification of SR1A-A2/LxxL-CE1017*


Dimensions in millimeters (in)

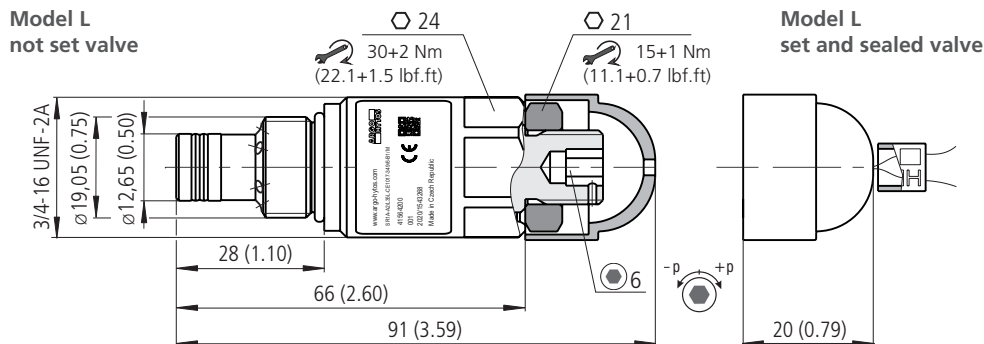

Ordering Code

SR1A-A2 / L	L	- CE1017 -	/	- B1
Pressure relief valve, PED certified, poppet type, direct acting	Valve cavity 3/4-16 UNF (C-8-2)	Model Lightline	Pressure range adjustable pressure 63 bar (910 PSI) adjustable pressure 100 bar (1450 PSI) adjustable pressure 160 bar (2320 PSI) adjustable pressure 250 bar (3630 PSI) adjustable pressure 350 bar (5080 PSI)	Surface treatment zinc-coated (ZnNi), ISO 9227 (1000 h) Pressure setting at flow rate [l/min]* Std. pressure setting made at flow 6 litres/min (example) Adjusted pressure [bar]* (example) Certification PED notified body number CE1017 Seals NBR FPM (Viton) Adjustment option allen head (hex. 6), with protective cap, sealable (lockwire holes)
	6	No designation V	120	6

*If not preset valves are ordered, pressure and flow rate information is not shown.

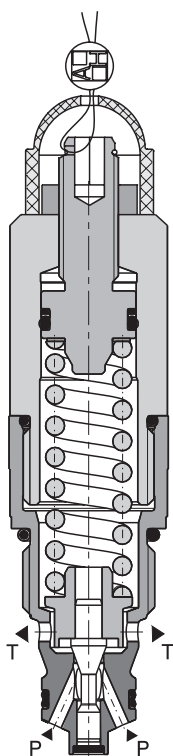

Technical Features

- › Hydraulic safety relief valve suitable for use as a safety device in Category IV Group 2 applications acc. to European Commission (EC) Pressure Equipment Directive (PED) 2014/68/EU
- › CE marked valves are supplied with "Declaration of Conformity", "Operating Instructions" and the list of residual risks. Always follow the operating instructions supplied with the valve!
- › Excellent stability throughout flow range with rapid response to dynamic pressure changes
- › Low hysteresis, accurate pressure control and low pressure drop through CFD optimized flow paths
- › Wide pressure range up to 420 bar
- › Hardened precision parts
- › Sharp-edged steel seats for dirt-tolerant performance
- › Leak-free closing and suitable for fast cycling with long life
- › In the standard version, the valve is zinc-coated for 1000 h protection acc. to ISO 9227


Functional Description

A poppet type, direct acting hydraulic relief valve in the form of a screw-in cartridge intended for use as a pressure limiting device for common hydraulic circuit protection. The spring acts on the poppet and presses it onto the valve seat. If the hydraulic pressure is below the pre-set value, the valve is closed. If the hydraulic force exceeds the pre-set value the valve opens and flow passes to tank port until the system pressure falls below the spring pre-set value and the valve closes back again.

Technical Data


Valve size / Cartridge cavity		7/8-14 UNF-2A / B2 (C-10-2)
Max. flow	l/min (GPM)	60 (15.9)
Max. operating pressure	bar (PSI)	420 (6090)
Max. pressure (T port)	bar (PSI)	250 (3630)
Fluid temperature range (NBR)	°C (°F)	-30 ... +100 (-22 ... 212)
Fluid temperature range (FPM)	°C (°F)	-20 ... +120 (-4 ... 248)
Max. leakage of closed valve at 80% cracking pressure	cm ³ /min	0.1
Viscosity range	mm ² /s (SUS)	10 ... 500 (49 ... 2450)
Weight	kg (lbs)	0.27 (0.60)
Datasheet		Type
General information		GI_0060
Products operating conditions		
Valve bodies	In-line mounted	SB_0018
	Sandwich mounted	SB-04(06)_0028
Cavity details / Form tools		SMT_0019
Spare parts		SP_8010
		SB-B2*
		SB-*B2*
		SMT-B2*

Symbol



Characteristics measured at $v = 32 \text{ mm}^2/\text{s}$ (156 SUS)

Relief pressure related to flow rate

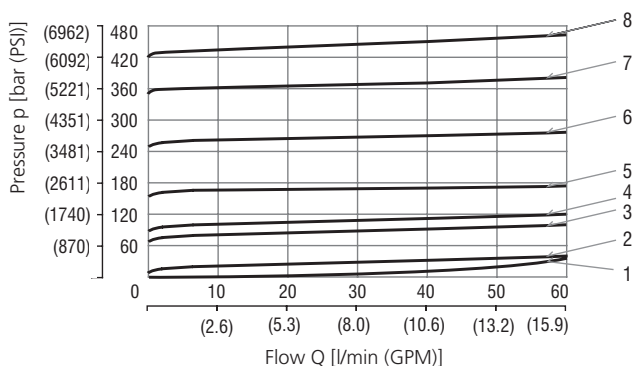

Setting	Pressure range
8	42
7	35
6	25
5	16
4	10
3	6
2	2
1	Min. pressure setting

Valves Adjusted by the Manufacturer

- › The valves are adjusted for the specified pressure at the relevant flow rate and they are fitted with tamper-indicating seals
- › The pressure and flow rate values are indicated in the valve description on the product [pressure: in bar, flow rate in l/min]
- › The seals bear the company logo

Valves NOT Adjusted by the Manufacturer

- › Valves have no tamper-indicating seals
- › No pressure and no flow rate indicated - SR1A-B2/HxxL-CE1017
- › After the completion of the functional test, the adjusting screw is completely loosened and the pressure is set to $p = 0$ bar
- › To adjust the required valve pressure proceed as follows:
 - turn the adjusting screw to the right (clockwise) to increase the pressure
 - turn the adjusting screw to the left (counter-clockwise) to decrease the pressure
- › The manufacturer accepts no responsibility for the adjustment, securing, and sealing of the valve

Residual Risks


Residual risks are listed and preventive measures against the occurrence of residual risk are described in the document „Operating instructions for pressure relief valve SR1A-B2/HxxL-CE1017“ which is delivered with each valve.

Application area

The diagram shows the operating region where the valve meets the requirements of Directive 2014/68/EU and Standard ISO 4126-1 on maximum short-time overshoot of system pressure by 10 % above the set cracking pressure when the valve opens.


The dynamics of the valve depend on the kinematic viscosity of working fluid.

Measurement conditions: oil Renolin VG 32, $T = 40$ °C (104 °F), $V = 0.5$ l (0.132 gal US)

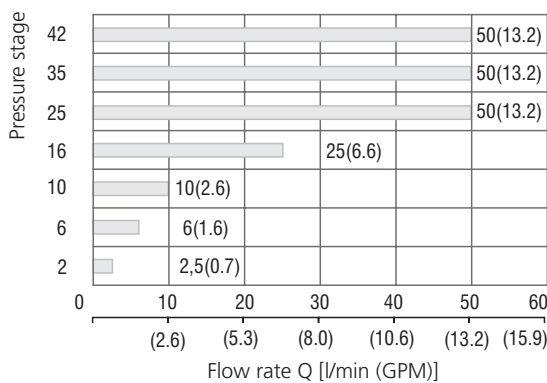

Application area characteristics from certification of SR1A-B2/HxxL-CE1017*



Dimensions in millimeters (inches)

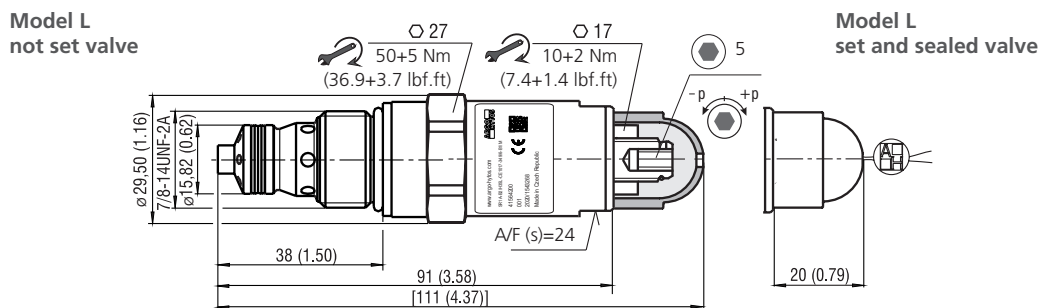

Ordering Code

SR1A-B2 / H		L		- CE1017 -	/		- B1
Pressure Relief Valve, PED Certified, Poppet Type, Direct Acting							Surface treatment zinc-coated (ZnNi), ISO 9227 (1000 h)
Valve cavity 7/8-14 UNF (C-10-2)							Pressure setting at flow rate [l/min]* Std. pressure setting made at flow 6 litres/min (example) 6
Model High performance						120	Adjusted pressure [bar]* (example)
Pressure range adjustable pressure 25 bar (360 PSI) adjustable pressure 63 bar (910 PSI) adjustable pressure 100 bar (1450 PSI) adjustable pressure 160 bar (2320 PSI) adjustable pressure 250 bar (3630 PSI) adjustable pressure 350 bar (5080 PSI) adjustable pressure 420 bar (6090 PSI)		2 6 10 16 25 35 42					Certification PED notified body number CE1017
				No designation V			Seals NBR FPM (Viton)
							Adjustment option allen head (hex. 5), with protective cap, sealable (lockwire holes)

*If not preset valves are ordered, pressure and flow rate information is not shown.

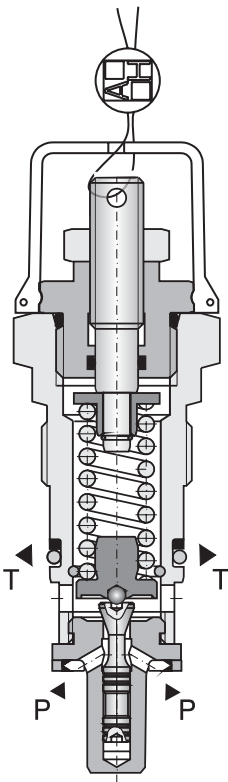

Technical Features

- › Hydraulic safety relief valve suitable for use as a safety device in Category IV Group 2 applications acc.to European Commission (EC) Pressure Equipment Directive (PED) 2014/68/EU
- › CE marked valves are supplied with "Declaration of Conformity", "Operating Instructions" and the list of residual risks
- › Always follow the operating instructions supplied with the valve
- › Excellent stability throughout flow range with rapid response to dynamic pressure changes
- › Low hysteresis, accurate pressure control and low pressure drop through CFD optimized flow paths
- › Wide pressure range up to 320 bar
- › Hardened precision parts
- › Sharp-edged steel seats for dirt-tolerant performance
- › Leak-free closing, suitable for fast cycling with long life
- › In the standard version, the valve is black oxide coated

Functional Description


A poppet type, direct acting hydraulic relief valve in the form of a screw-in cartridge intended for use as a pressure limiting device for common hydraulic circuit protection. The spring acts on the poppet and presses it onto the valve seat. If the hydraulic pressure is below the pre-set value, the valve is closed. If the hydraulic force exceeds the pre-set value the valve opens and flow passes to the tank port until the system pressure falls below the spring pre-set value and the valve closes again.

Technical Data

Valve size / Cartridge cavity		M28 x 1.5 / QP2
Max. flow	l/min (GPM)	50 (13.2)
Max. operating pressure	bar (PSI)	320 (4640)
Fluid temperature range (NBR)	°C (°F)	-30 ...+100 (-22... 212)
Fluid temperature range (FPM)	°C (°F)	-20 ...+120 (-4... 248)
Viscosity range	mm ² /s (SUS)	10 ... 500 (49 ... 2450)
Weight	kg (lbs)	0.4 (0.88)
Datasheet		Type
General information		GI_0060
Product and operating conditions		
Valve bodies	In-line mounted	SB_0018
SB-QP2*		
Cavity details	SMT_0019	SMT-QP2*
Spare parts		SP_8010

Characteristics measured at $v = 32 \text{ mm}^2/\text{s}$ (156 SUS)

Relief pressure related to flow rate

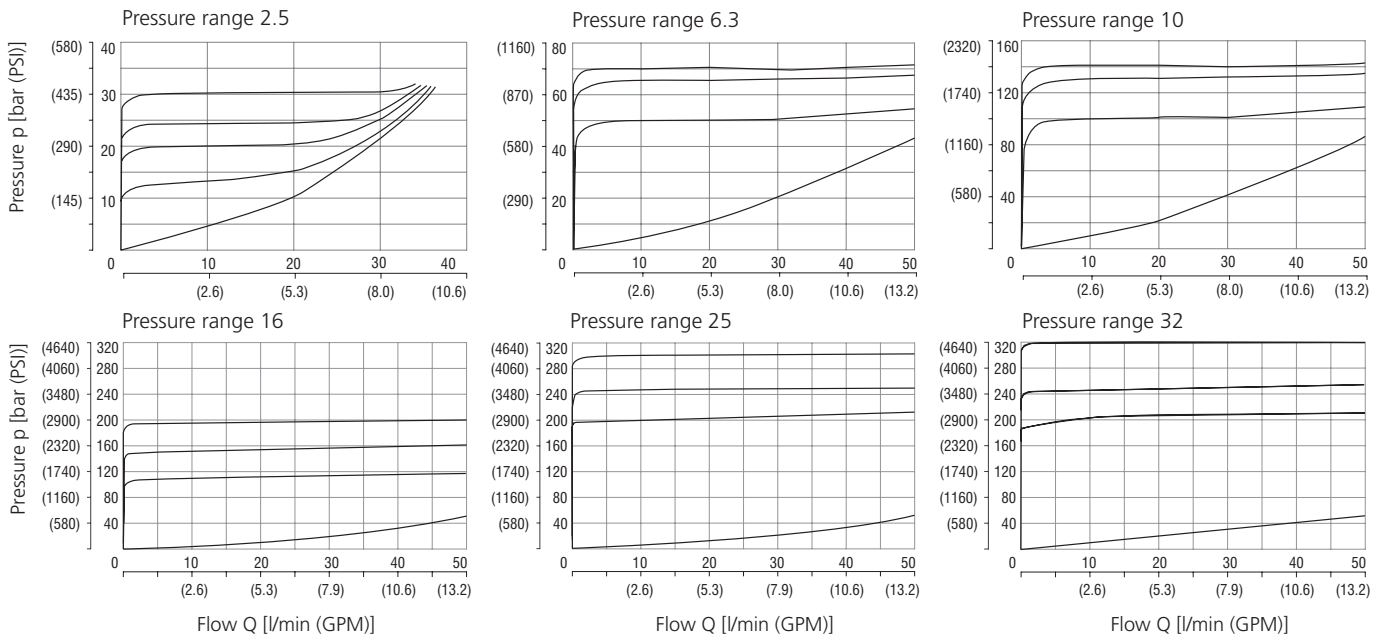

Valves Adjusted by the Manufacturer

- › The valves are adjusted for the specified pressure at the relevant flow rate and they are fitted with tamper-indicating seals
- › The pressure and flow rate values are indicated in the valve description on the product [pressure: in bar, flow rate in l/min]
- › The seals bear the company logo

Valves NOT Adjusted by the Manufacturer

- › Valves have no tamper-indicating seals
- › No pressure and no flow rate indicated
- › After the completion of the functional test, the adjusting screw is completely loosened and the pressure is set to $p = 0$ bar
- › To adjust the required valve pressure proceed as follows:
 - turn the adjusting screw to the right (clockwise) to increase the pressure
 - turn the adjusting screw to the left (counter-clockwise) to decrease the pressure
- › The manufacturer accepts no responsibility for the adjustment, securing, and sealing of the valve

Residual Risks


Residual risks are listed and preventive measures against the occurrence of residual risk are described in the document „Operating instructions for pressure relief valve VPP2-06-xV/xx-CE1017“ which is delivered with each valve.

Operating Region

The diagram shows the operating region where the valve meets the requirements of Directive 2014/68/EU and Standard ISO 4126-1 on maximum short-time overshoot of system pressure by 10 % above the set cracking pressure when the valve opens.

The dynamics of the valve depend on the kinematic viscosity of working fluid.


Measurement conditions: oil Renolin VG 32, $T = 40$ °C (104 °F), $V = 0.5$ l (0.132 gal US)

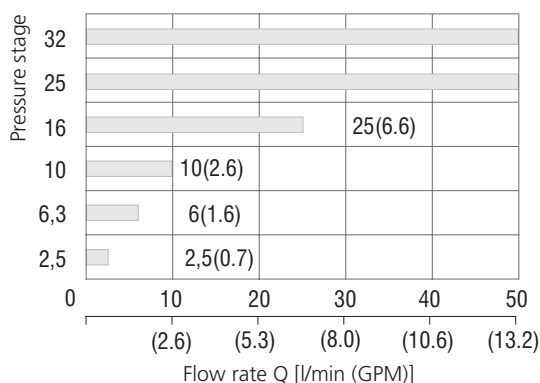


Operating region characteristics from certification of VPP2-06*CE*

Dimensions in millimeters (inches)

Model T

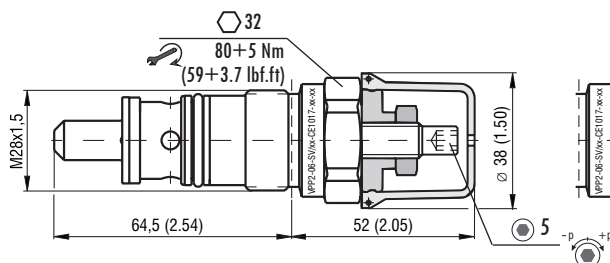

Model L



Ordering Code

VPP2-06- [] V / [] [] - CE1017- [] - []

Pressure relief valve, PED certified, poppet type, direct acting M28 x 1.5

Adjustment option

allen key (hex. 5), with protective cap **T**
 allen key (hex. 5), with protective cap, sealable (lockwire holes) **L**

Model

screw-in cartridge

Pressure range

up to 25 bar (360 PSI) **2,5**
 up to 63 bar (910 PSI) **6,3**
 up to 100 bar (1450 PSI) **10**
 up to 160 bar (2320 PSI) **16**
 up to 250 bar (3630 PSI) **25**
 up to 320 bar (4600 PSI) **32**

Surface treatment
 No designation black oxide coating
A zinc-coated (ZnCr-3), ISO 9227 (240 h)
B zinc-coated (ZnNi), ISO 9227 (520 h)



Relief pressure and flow rate setting
 120/6 (example) 120 bar / 6 l/min

Certification PED
 notified body number CE1017

No designation
V

Seals
 NBR
 FPM (Viton)

If not preset valves are ordered, pressure and flow rate information is not shown.

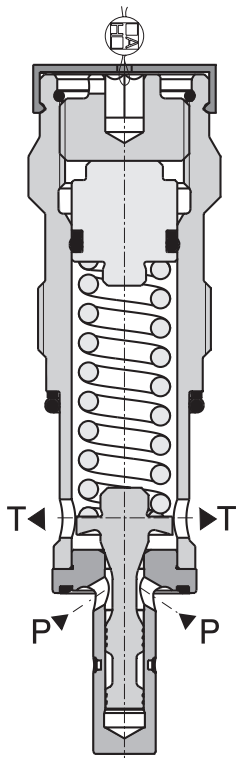

Technical Features

- › Hydraulic safety relief valve suitable for use as a safety device in Category IV Group 2 applications acc.to European Commission (EC) Pressure Equipment Directive (PED) 2014/68/EU
- › CE marked valves are supplied with "Declaration of Conformity", "Operating Instructions" and the list of residual risks. Always follow the operating instructions supplied with the valve!
- › Large flow range and pressure up to 350 bar
- › Low hysteresis, accurate pressure control and low pressure drop through CFD optimized flow paths
- › Hardened precision parts
- › Leak-free closing, suitable for fast cycling with long life
- › Adjustment option with allen head, adjustable hand knob or sealing (Lockwire holes)
- › In the standard version, the valve is zinc coated for 520 h protection acc. to ISO 9227

Functional Description

A poppet type, direct acting hydraulic relief valve in the form of a screw-in cartridge intended for use as a pressure limiting device for common hydraulic circuit protection. The spring acts on the poppet and presses it onto the valve seat. If the hydraulic pressure is below the pre-set value, the valve is closed. If the hydraulic force exceeds the pre-set value the valve opens and flow passes to the tank port until the system pressure falls below the spring pre-set value and the valve closes again.


Technical Data

Valve size		M36 x 2
Max. flow	l/min (GPM)	120 (31.7)
Max. inlet pressure (port P)	bar (PSI)	350 (5080)
Max. outlet pressure (port T)	bar (PSI)	250 (3630)
Fluid temperature range (NBR)	°C (°F)	-30 ... +100 (-22 ... 212)
Fluid temperature range (FPM)	°C (°F)	-20 ... +120 (-4 ... 248)
Max. leakage of closed valve at the input pressure set on 80 % of cracking pressure	cm ³ /min	0.2
Kinematic viscosity range	mm ² /s (SUS)	10 ... 500 (49 ... 2450)
Weight	valve	0.56 (1.22)
	valve with body	3.05 (6.73)
General information	Datasheet	Type
Spare parts	GI_0060	Products and operating conditions
	SP_8010	

Characteristics measured at v = 32 mm²/s (156 SUS)

Relief pressure related to flow rate

	Pressure stage	Pressure range (PSI)
3	28	280 - 350
2	13	130 - 280
1	5	50 - 130

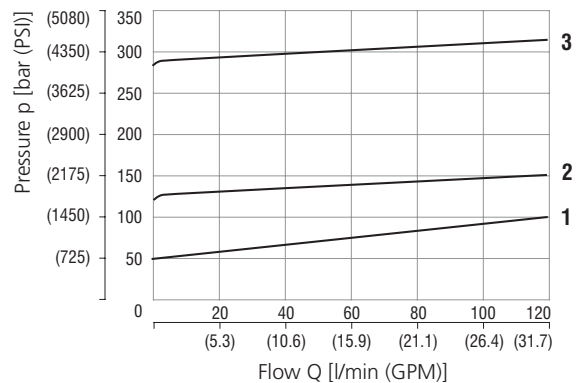

Valve adjusted by the manufacturer

- › The valve is adjusted for the specified cracking pressure at the relevant flow rate and they are fitted with tamper-indicating seal.
- › The pressure and flow rate values are indicated in the valve description [in bar, or liters per min respectively].
- › The seal bear the ARGO-HYTOS logo.

Unadjusted valve

- › The valve have no tamper-indicating seal.
- › No adjusted pressure and flow rate are indicated for unadjusted valve - VPP-R-16-xx-L-CE1017.
- › The adjusting screw is completely loosened. Pressure p = 0 bar
- › For the adjustment of the valve required pressure, proceed as follows:
 - Turn right = higher pressure
 - Turn left = lower pressure
- › Producer ARGO-HYTOS (CZ) takes no responsibility for the adjustment, securing and sealing the valve.

Residual risks


Residual risks are listed and preventive measures against the occurrence of residual risk are described in the document „Operating instructions for pressure relief valve VPP-R-16-xx-L-CE1017“ which is delivered with each valve.

Application area

The diagram shows the area of the valve application meets the requirement of Directive 2014/68/EU and Standard ISO 4126-1 on maximal short-time overshooting of system pressure 10 % above the set cracking pressure when the valve opens.


The dynamics of the valves depends on the kinematic viscosity of working fluid.

Measurement conditions: oil Renolin VG 32, T = 40 °C (104 °F), V = 0.5 l (0.132 gallon US)

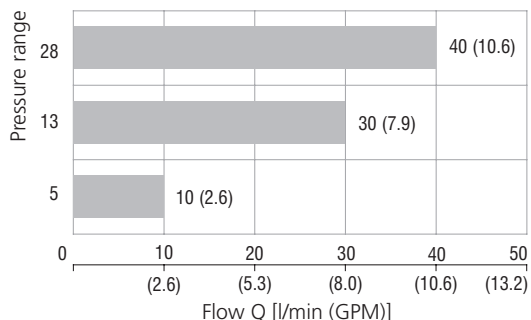

Operating region characteristics from certification of VPP-R-16*CE1017*

Cavity dimensions in millimeters (inches)

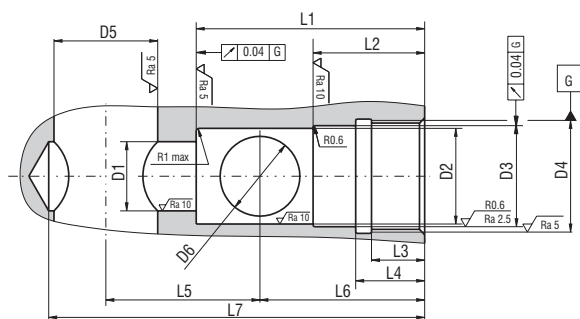


Dimensions in mm (in)			
∅ D1	20 H14 (0.79)	L1	66 (2.6 / 2.61)
∅ D2	30 H11 (1.18)	L2	31 (1.22 / 1.22)
∅ D3	32,6 H10 (1.28)	L3	18 (0.71 / 0.73)
∅ D4	M36x2-7H	L4	21 (0.83 / 0.85)
∅ D5	30 (1.18)	L5	46 (1.81)
∅ D6	25 max (0.98 max)	L6	44 (1.73 / 1.75)
		L7	105 (4.13)

Dimensions in millimeters (inches)


VPP-R

1:1

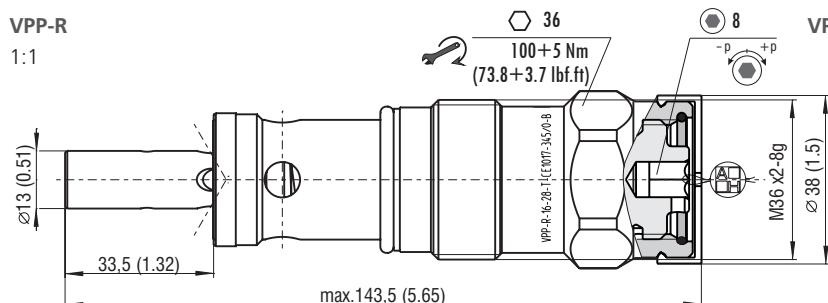

VPP-B-R

1:2

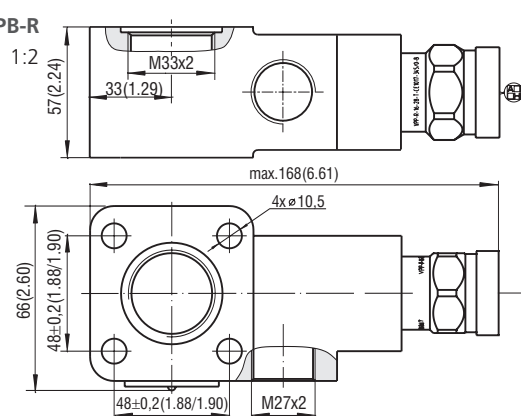

Ordering Code

VPP **-R-16-** **- L -** **- CE1017-** **/** **- B**


<p>Pressure relief valve PED certified, direct acting</p> <p>M36 x 2</p>	<p>Design of screw-in cartridge valve without a body with a body</p> <p>No designation B</p>	<p>Valve size</p> <p>Range of adjustable pressure - pressure stage 50 - 130 bar (730 - 1890 PSI) 5 130 - 280 bar (1890 - 4060 PSI) 13 280 - 350 bar (4060 - 5080 PSI) 28</p> <p>Adjustment option allen head HEX 8 with protective cap and sealing (Lockwire holes)</p>	<p>Surface treatment zinc-coated (ZnNi), ISO 9227 (520 h)</p> <p>Pressure setting at flow rate [l/min]* Std. pressure setting made at flow 6 litres/min (example) 6</p> <p>Adjusted pressure [bar]* (example) 120</p> <p>Certification PED notified body number CE1017</p> <p>Seals NBR FPM (Viton)</p>
--	---	---	--

No designation
V

*If not preset valves are ordered, pressure and flow rate information is not shown.

VPP2-04/M(R)


Size 04 (D02), 06 (D03) • Q_{max} 40 l/min (11 GPM) • p_{max} 320 bar (4600 PSI)

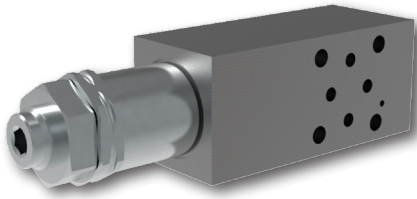

Technical Features

- › Pressure relief valve, poppet type, direct acting, modular with mounting interface acc. to ISO 4401, DIN 24340 (CETOP 02 and 03) or in-line design
- › Excellent stability throughout flow range with rapid response to dynamic pressure changes
- › Low hysteresis, accurate pressure control and low pressure drop
- › Wide pressure range up to 320 bar
- › Hardened precision parts
- › Sharp-edged steel seats for dirt-tolerant performance
- › Leak-free closing, suitable for fast cycling with long life
- › Adjustable by allen key or hand screw
- › In the standard version the valve body is phosphated. The valve surface are zinc coated (240 h corrosion protection in NSS acc. to ISO 9227)

Functional Symbols

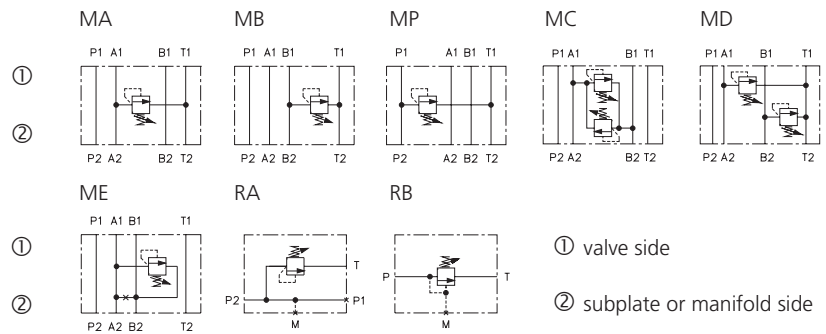


Notice: The orientation of the symbol on the name plate corresponds with the valve function.

Technical Data


Valve size	04 (D02), 06 (D03)	
Max. flow	l/min (GPM)	40 (10.6)
Max. pressure	bar (PSI)	320 (4640)
Fluid temperature range (NBR)	°C (°F)	-30...+100 (-22...+212)
Fluid temperature range (FPM)	°C (°F)	-20...+120 (-4...+248)
Weight - models MA (B, P) 04	kg (lbs)	0.82 (1.81)
- models MC (D, E) 04		1.32 (2.91), ME 1.25 (2.76)
- models MA (B, P) 06		1.12 (2.46)
- models MC (D, E) 06		1.42 (3.12), ME 1.35 (2.98)
- models RA1 (2), RB1 (2)		1.17 (2.57)
	Datasheet	Type
General information	GI_0060	Products operating conditions
Mounting interface	SMT_0019	Size 04 / 06
Spare parts	SP_8010	

ISO 4401-02-01-0-05



Ports P, A, B, T - max. \varnothing 4.5 mm (0.18 in)


ISO 4401-03-02-0-05

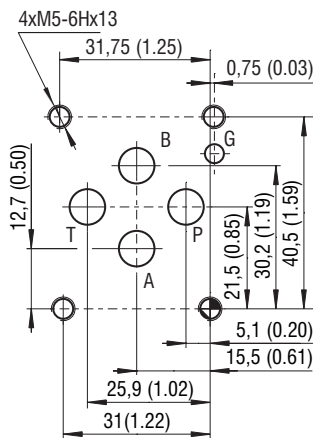

Ports P, A, B, T - max. \varnothing 7.5 mm (0.29 in)


Characteristics measured at $v = 32 \text{ mm}^2/\text{s}$ (156 SUS)

Relief pressure related to flow rate

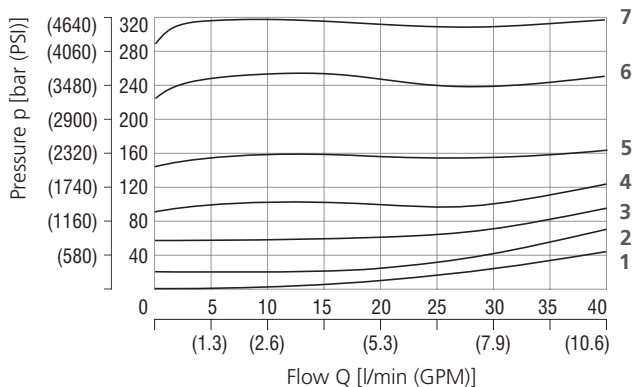

Pressure range	Min. pressure setting	2	6	10	16	25	32
	1	2	3	4	5	6	7


Minimum set and circulation pressure

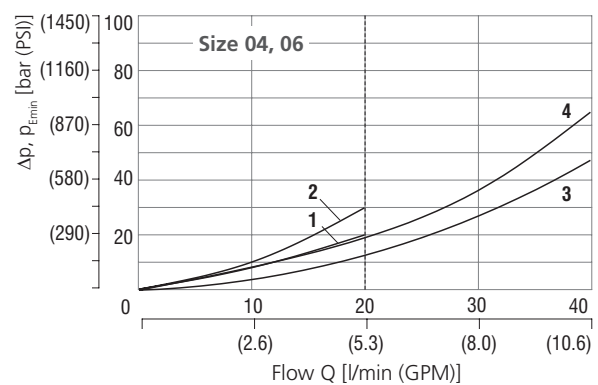


Size 04	Size 06	Models
1	3	MA, MB, MP, MD
2	4	MC, ME

Dimensions in millimeters (inches)


Model MA

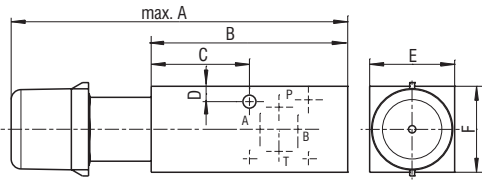

Model MC,MD

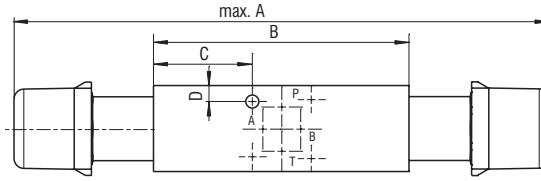


Model MB, MP

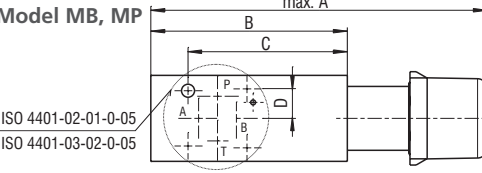


ISO 4401-02-01-0-05
ISO 4401-03-02-0-05

Model ME

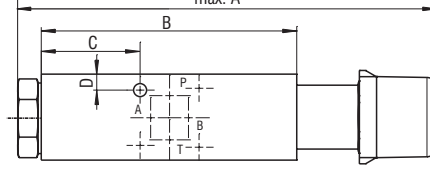


Version	Size	04 (D02)	06 (D03)
MA (B,P)	A	137 (5.39)	
MC (D)		218 (8.58)	208 (8.19)
ME		170.5 (6.71)	160.5 (6.32)
MA (B,P)	B	80 (3.15)	
MC (D,E)		104 (4.09)	94 (3.70)
MA (C,D,E)	C	40 (1.57)	25.5 (1.0)
MB (P)		64 (2.52)	68.5 (2.7)
	D	6.25 (0.25)	7 (0.28)
MA (B,C)	E	35 (1.38)	40 (1.57)
MD (E,P)	F	35 (1.38)	45 (1.77)

Model RA1, RA2

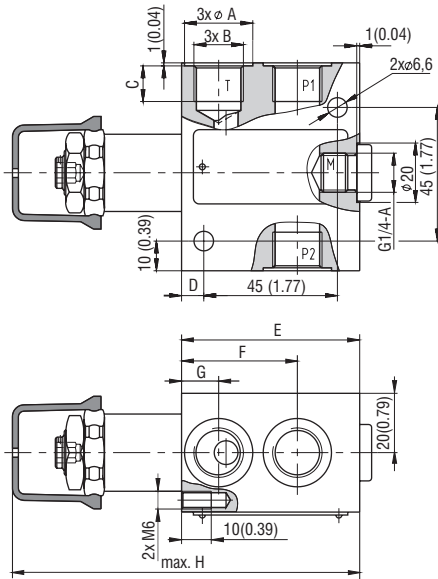

Model RB1, RB2

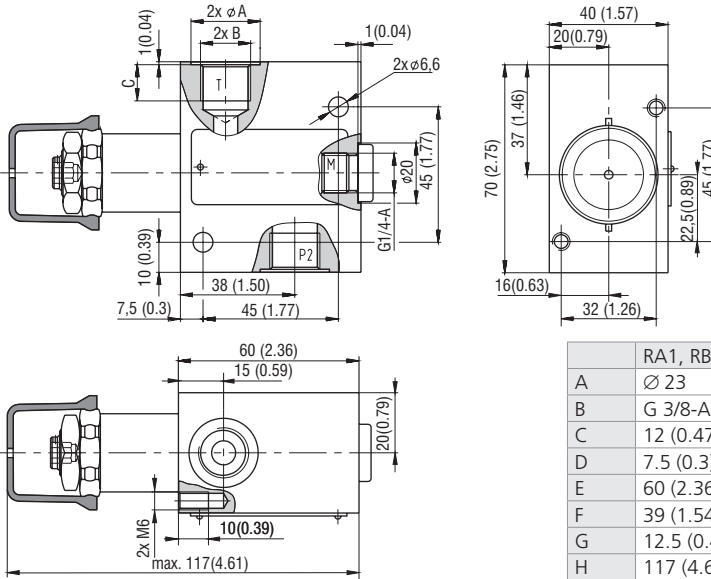

	RA1, RB1	RA2, RB2
A	∅ 23	∅ 28
B	G 3/8-A	G 1/2-A
C	12 (0.47)	14 (0.55)
D	7.5 (0.3)	18 (0.71)
E	60 (2.36)	70 (2.76)
F	39 (1.54)	46 (1.81)
G	12.5 (0.49)	16 (0.63)
H	117 (4.61)	127 (5)

Ordering Code

VPP2-04 / [] - [] - [] - [] - []

Pressure relief valve, poppet type, direct acting, modular

No designation
A zinc-coated (ZnCr-3), ISO 9227 (240 h)
B zinc-coated (ZnNi), ISO 9227 (520 h)

Surface treatment
standard

No designation
V

Seals
NBR
FPM (Viton)

Model

modular, valve from A to T
 modular, valve from B to T
 modular, valve from P to T
 modular, valve from A to B and B to A
 modular, valve from A to T and B to T
 modular, valve from A to B
 in-line valve, three ports, thread G 3/8 (P1, P2, T)
 in-line valve, three ports, thread G 1/2 (P1, P2, T)
 in-line valve, two ports, thread G 3/8 (P, T)
 in-line valve, two ports, thread G 1/2 (P, T)

MA
MB
MP
MC
MD
ME
RA1
RA2
RB1
RB2

Adjustment option*
S allen key (hex. 6), without protective cap
T allen key (hex. 6), with protective cap
RS hand screw, metal
L allen key (hex. 6), with protective cap, sealable (lockwire holes)

Model with two pressure relief cartridges
A side, allen key (hex. 6), without protective cap
B side, hand screw, metal

*for dimensions of adjustment options see data sheet No.5093

Modular plate size

ISO 4401-02-01-0-05, DIN 24340 (CETOP 02), size 04 **04**
 ISO 4401-03-02-0-05, DIN 24340 (CETOP 03), size 06 **06**


Pressure range
2 up to 25 bar (360 PSI)
6 up to 63 bar (910 PSI)
10 up to 100 bar (1450 PSI)
16 up to 160 bar (2320 PSI)
25 up to 250 bar (3630 PSI)
32 up to 320 bar (4600 PSI)

Model with two pressure relief cartridges
 320 bar (4600 PSI) in port A, 100 bar (1450 PSI) in port B

Pressure Relief Valve, Spool Type, Pilot Operated

SR4A-B2

7/8-14 UNF • Q_{max} 100 l/min (26 GPM) • p_{max} 350 bar (5100 PSI)

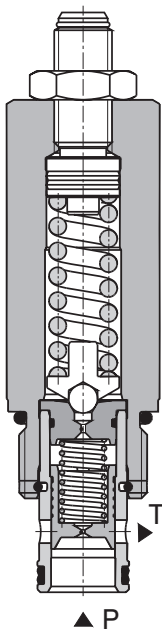


Technical Features

- › Low hysteresis, accurate pressure control and low pressure drop through CFD optimized flow paths
- › Wide pressure range up to 350 bar
- › High flow capacity
- › Hardened precision parts
- › Ideal for use as control valve where accuracy and repeatability is required
- › Adjustable by allen key hand screw
- › In the standard version, the valve is zinc-coated for 240 h protection acc. to ISO 9227

Functional Description

A pilot operated, spool type hydraulic relief valve in the form of a screw-in cartridge intended for use as a pressure limiting device. Fast-acting with low hysteresis. Because of the absence of any internal seals, the valve shows excellent reseating and repeatability characteristics. It may be used as a main pressure control element but due to its two stage design it is not recommended for safety applications where operating speed is critical.

Symbol




Technical Data

Valve size / Cartridge cavity		7/8-14 UNF-2A / B2 (C-10-2)	
Max. flow	l/min (GPM)	100 (26)	
Max. operating pressure	bar (PSI)	350 (5080)	
Max. pressure (T port)	bar (PSI)	100 (1450)	
Fluid temperature range (NBR)	°C (°F)	-30 ... +100 (-22 ... 212)	
Fluid temperature range (FPM)	°C (°F)	-20 ... +120 (-4 ... 248)	
Weight	kg (lbs)	0.24 (0.53)	
		Datasheet	Type
General information		GP_0060	Products and operating conditions
Valve bodies	In-line mounted	SB_0018	SB-B2*
	Sandwich mounted	SB-04(06)_0028	SB-*B2*
Cavity details / Form tools		SMT_0019	SMT-B2*
Spare parts		SP_8010	


Characteristics measured at $v = 32 \text{ mm}^2/\text{s}$ (156 SUS)

Relief pressure related to flow rate

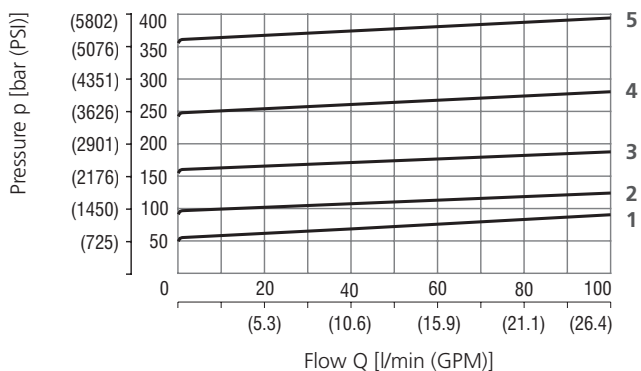


	Pressure range
5	35
4	25
3	16
2	10
1	6

Minimum set and circulation pressure

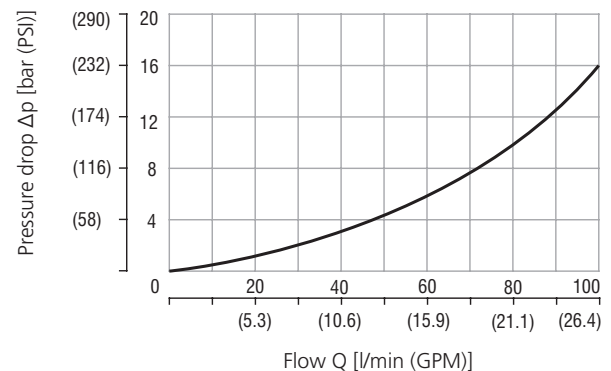


Dimensions in millimeters (inches)


Model S

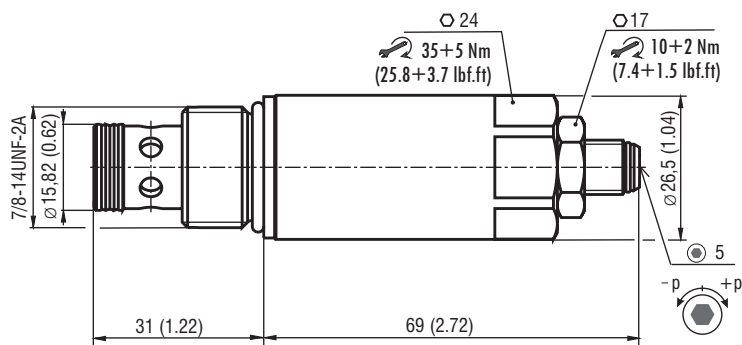

Model T



Model RP

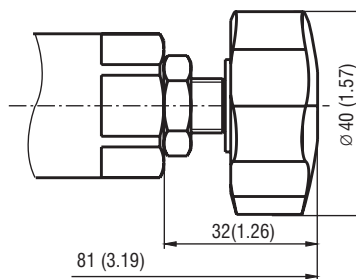

Ordering Code

SR4A-B2 / H [] [] [] - []

Pressure relief valve, spool type, pilot operated

Valve cavity
7/8-14 UNF (C-10-2)

Model
High performance

Pressure range
up to 63 bar (910 PSI) **6**
up to 100 bar (1450 PSI) **10**
up to 160 bar (2320 PSI) **16**
up to 250 bar (3630 PSI) **25**
up to 350 bar (5080 PSI) **35**

Surface treatment
A zinc-coated (ZnCr-3), ISO 9227 (240 h)
B zinc-coated (ZnNi), ISO 9227 (520 h)

Seals
NBR
FPM (Viton)

Adjustment option
allen key (hex. 5), without protective cap
allen key (hex. 5), with protective cap
hand screw, plastic


No designation
V

S
T
RP

VPN1-06/S

M22 x 1.5 • Q_{max} 70 l/min (18.5 GPM) • p_{max} 320 bar (4600 PSI)

Model S

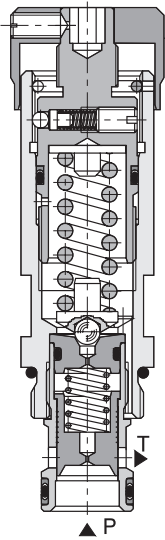

Technical Features


- › Excellent stability throughout flow range with rapid response to dynamic pressure changes
- › Low hysteresis, accurate pressure control and low pressure drop
- › Wide pressure range up to 320 bar
- › High flow capacity
- › Hardened precision parts
- › Ideal for use as control valve where accuracy and repeatability is required
- › External pilot and drain option
- › Adjustable by allen key or hand screw, optionally sealable (lockwire holes)
- › In the standard version, the valve is zinc-coated for 240 h protection acc. to ISO 9227

Functional Description

A pilot operated, spool type hydraulic relief valve in the form of a screw-in cartridge intended for use as a pressure limiting device. Fast-acting with low hysteresis. Because of the absence of any internal seals, the valve shows excellent reseating and repeatability characteristics. It may be used as a main pressure control element but due to its two stage design it is not recommended for safety applications where operating speed is critical. Version SX has an external pilot line, version SY allows a separate drain connection.

Model	S	SX	SY
Symbol			

Model SX (SY)

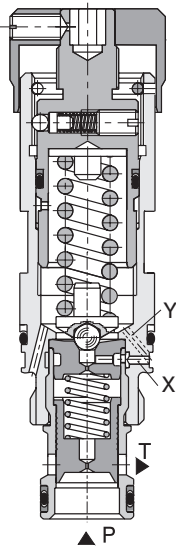


Technical Data

Valve size / Cartridge cavity		M22 x 1.5 / QG2	M22 x 1.5 / QF2
Model		S	SX, SY
Max. flow	l/min (GPM)	70 (18.5)	
Max. operating pressure	bar (PSI)	320 (4640)	
Fluid temperature range (NBR)	°C (°F)	-30 ... +100 (-22 ... 212)	
Fluid temperature range (FPM)	°C (°F)	-20 ... +120 (-4 ... 248)	
Weight	kg (lbs)	0.25 (0.55)	
	Datasheet	Type	
General information	GI_0060	Products and operating conditions	
Valve bodies	In-line mounted	SB_0018	SB-QG2*
	Sandwich mounted	SB-04(06)_0028	SB-*QG2*
Cavity details	SMT_0019	SMT-QG2*	SMT-QF2*
Spare parts	SP_8010		

Characteristics measured at v = 32 mm²/s (156 SUS)

Relief pressure related to flow rate


Model S, SX

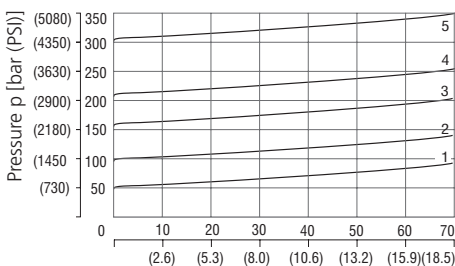

	Pressure range
5	32
4	21
3	16
2	10
1	6

Relief pressure related to flow rate


Model SY

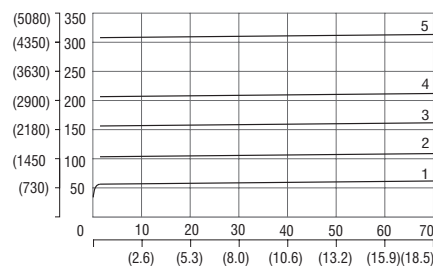

	Pressure range
5	32
4	21
3	16
2	10
1	6

Minimum set and circulation pressure


Model S, SX, SY

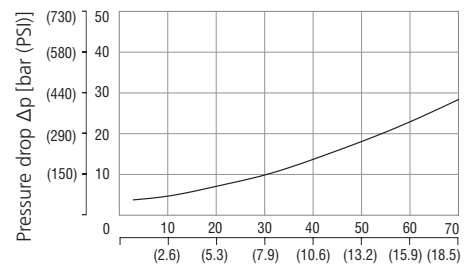


Dimensions in millimeters (inches)

VPN1-06/S


Model S

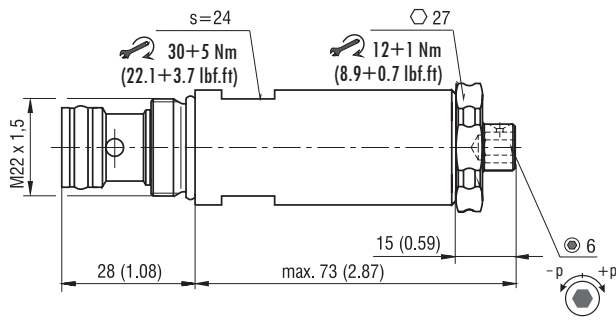


Model T




Model RS



Model RP




Model L




VPN1-06/SX (SY)


Model S

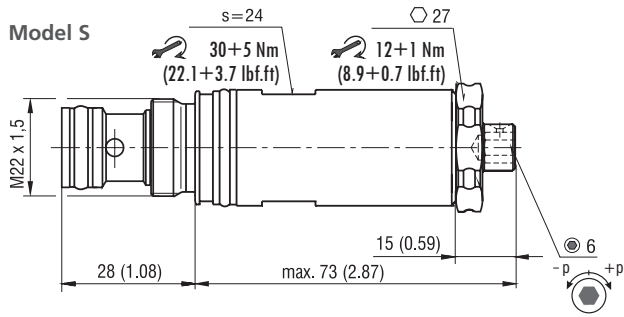


Model T




Model RS



Model RP



Model L



Ordering Code

VPN1-06 / [] - [] [] [] - []

Pressure relief valve, spool type, pilot operated, external pilot and drain M22 x 1.5

Model
internal pilot and drain S
external pilot, internal drain SX
internal pilot, external drain SY

Pressure range
up to 63 bar (910 PSI) 6
up to 100 bar (1450 PSI) 10
up to 160 bar (2320 PSI) 16
up to 210 bar (3050 PSI) 21
up to 320 bar (4600 PSI) 32

Surface treatment
A zinc-coated (ZnCr-3), ISO 9227 (240 h)
B zinc-coated (ZnNi), ISO 9227 (520 h)

No designation
V


Seals
NBR
FPM (Viton)

Adjustment option
allen key (hex. 6), without protective cap
allen key (hex. 6), with protective cap
hand screw, metal
hand screw, plastic
allen key (hex. 6), with protective cap, sealable (lockwire holes)

VPN2-10/S

M27x2 • Q_{max} 150 l/min (40 GPM) • p_{max} 350 bar (5100 PSI)

Model S

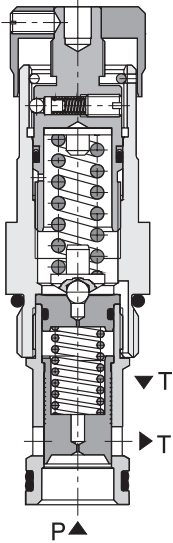

Technical Features


- › Excellent stability throughout flow range with rapid response to dynamic pressure changes
- › Low hysteresis, accurate pressure control and low pressure drop
- › Wide pressure range up to 350 bar
- › High flow capacity
- › Hardened precision parts
- › Ideal for use as control valve where accuracy and repeatability is required
- › External pilot and drain option
- › Adjustable by allen key or hand screw, optionally sealable (lockwire holes)
- › In the standard version, the valve is zinc-coated for 240 h protection acc. to ISO 9227

Functional Description

A pilot-operated, spool-type hydraulic relief valve in the form of a screw-in cartridge intended for use as a pressure limiting device. Fast-acting with low hysteresis. Because of the absence of any internal seals, the valve shows excellent reseating and repeatability characteristics. It may be used as a main pressure control element but due to its two stage design it is not recommended for safety applications where operating speed is critical. Version SX has an external pilot line, version SY allows a separate drain connection.

Model	S	SX	SY
Symbol			

Model SX (SY)

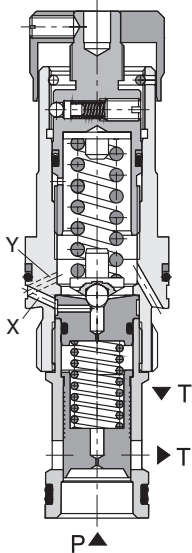

Technical Data


Valve size / Cartridge cavity		M27x2 / QK2	M27x2 / QL3
Model		S	SX, SY
Max. flow	l/min (GPM)	150 (39.6)	
Max. operating pressure	bar (PSI)	350 (5080)	
Fluid temperature range (NBR)	°C (°F)	-30 ... +100 (-22 ... 212)	
Fluid temperature range (FPM)	°C (°F)	-20 ... +120 (-4 ... 248)	
Mass	kg (lbs)	0.3 (0.66)	

		Datasheet	Type	
General information		GI_0060	Products operating conditions	
Valve bodies	In-line mounted	SB_0018	SB-QK2*	-
	Sandwich mounted	SB-04(06,10)_0028	SB-*QK2*	-
Cavity details		SMT_0019	SMT-QK2*	SMT-QL3*
Spare parts		SP_8010		

Characteristics measured at $v = 32 \text{ mm}^2/\text{s}$ (156 SUS)

Relief pressure related to flow rate


Model S, SX

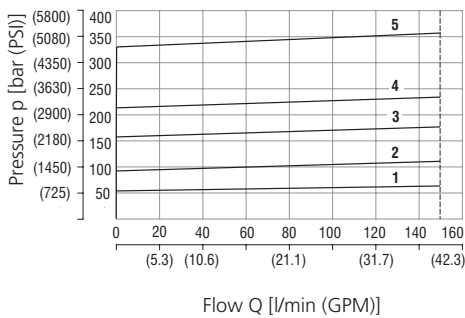

	Pressure range
5	32
4	21
3	16
2	10
1	6

Relief pressure related to flow rate


Model SY

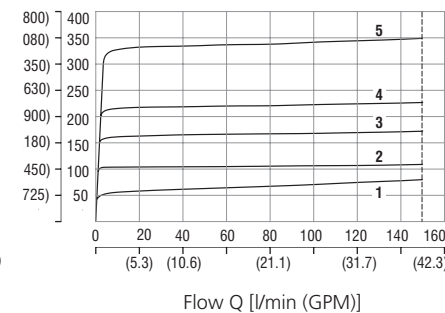

	Pressure range
5	32
4	21
3	16
2	10
1	6

Minimum set and circulation pressure


Model S, SX, SY

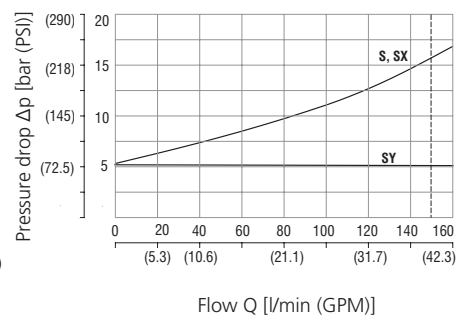


Dimensions in millimeters (inches)

VPN2-10/S


Model S

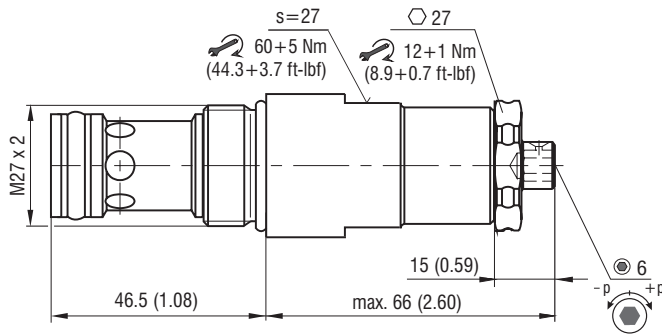


Model T




Model RS



Model RP




Model L




VPN2-10/SX (SY)


Model S

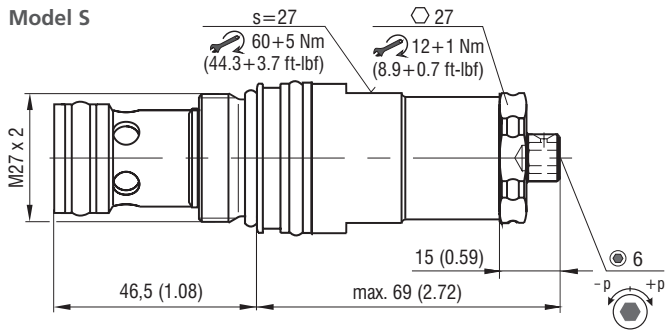


Model T




Model RS



Model RP



Model L



Ordering Code

VPN2-10 / [] - [] [] [] - []

Pressure relief valve, spool-type, pilot-operated, external pilot and drain M27x2

Model
 internal pilot and drain S
 external pilot, internal drain SX
 internal pilot, external drain SY

Pressure range

up to 63 bar (910 PSI)	6
up to 100 bar (1450 PSI)	10
up to 160 bar (2320 PSI)	16
up to 210 bar (3050 PSI)	21
up to 320 bar (4600 PSI)	32

Surface treatment
A zinc-coated (ZnCr-3), ISO 9227 (240 h)
B zinc-coated (ZnNi), ISO 9227 (520 h)


Seals
No designation NBR
V FPM (Viton)

Adjustment option
S allen key (hex. 6), without protective cap
T allen key (hex. 6), with protective cap
RS hand screw, metal
RP hand screw, plastic
L allen key (hex. 6), with protective cap, sealable (lockwire holes)

VPN1-20/S

M30 x 1,5 • Q_{max} 250 l/min (66 GPM) • p_{max} 420 bar (6100 PSI)

Model S

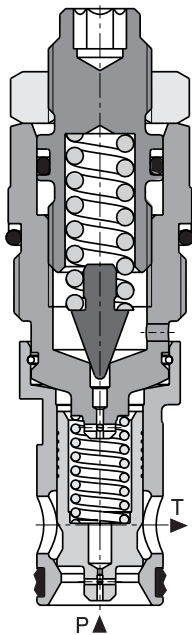

Technical Features

- › Excellent stability throughout flow range with rapid response to dynamic pressure changes
- › Low hysteresis, accurate pressure control and low pressure drop
- › Wide pressure range up to 420 bar
- › High flow capacity
- › Hardened precision parts
- › Ideal for use as control valve where accuracy and repeatability is required
- › External pilot and drain option
- › Adjustable by allen key or hand screw, optionally sealable (lockwire holes)
- › In the standard version, the valve is zinc-coated for 240 h protection acc. to ISO 9227

Functional Description

A pilot-operated, spool-type hydraulic relief valve in the form of a screw-in cartridge intended for use as a pressure limiting device. Fast-acting with low hysteresis. Because of the absence of any internal seals, the valve shows excellent reseating and repeatability characteristics. It may be used as a main pressure control element but due to its two stage design it is not recommended for safety applications where operating speed is critical. Version SX has an external pilot line, version SY allows a separate drain connection.

Model	S	SX	SY
Symbol			

Technical Data


Valve size		M30 x 1,5/RB2	M30 x 1,5/RB3
Model		S, SY	SX
Max. flow	l/min (GPM)	250 (66)	
Max. pressure ports (P, X)	bar (PSI)	420 (6100)	
Max. pressure ports (T, Y)	bar (PSI)	160 (2320)	
Fluid temperature range (NBR)	°C (°F)	-30 ... +100 (-22 ... 212)	
Fluid temperature range (FPM)	°C (°F)	-20 ... +120 (-4 ... 248)	
Weight	kg (lbs)	0.3 (0.66)	

	Datasheet	Type	
General information	GI_0060	Products operating conditions	
Valve bodies	In-line mounted	SB-RB2*	SB-RB3*
Cavity details	SMT_0019	SMT-RB2*	SMT-RB3*
Spare parts	SP_8010		

Characteristics measured at $v = 32 \text{ mm}^2/\text{s}$ (156 SUS)


Relief pressure related to flow rate

Model S

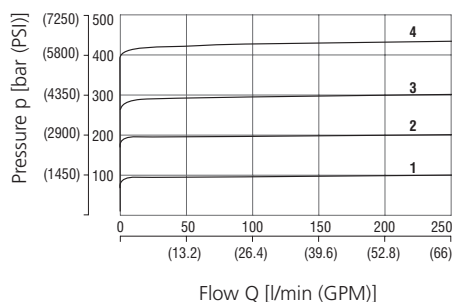


Relief pressure related to flow rate

Model SY



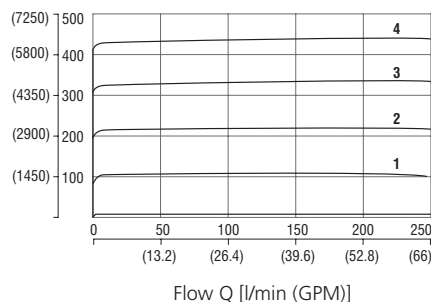


Minimum set and circulation pressure

Model S, SX, SY

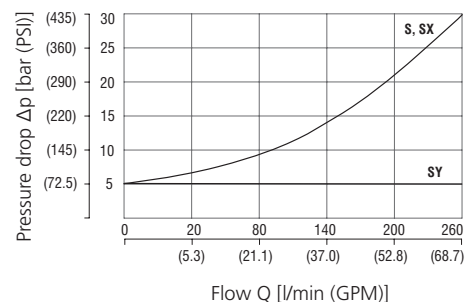

Dimensions in millimeters (inches)

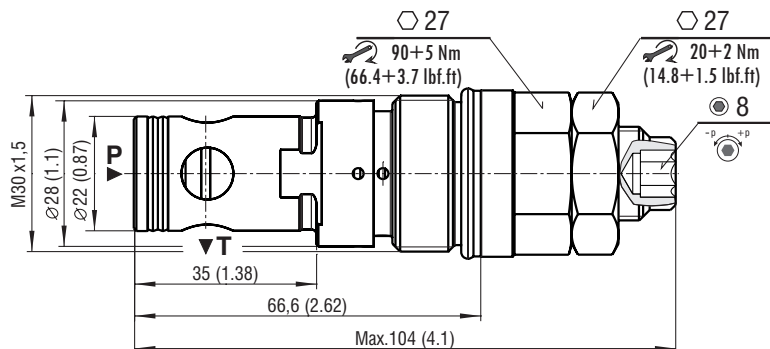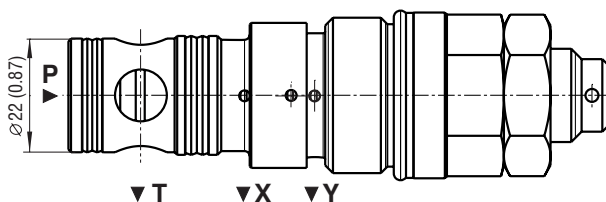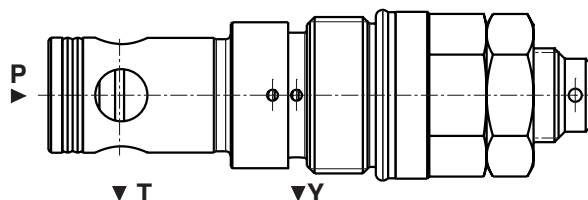
VPN1-20/S

VPN1-20/SX

VPN1-20/SY

Ordering Code

VPN1-20 /			
Pressure relief valve, spool-type, pilot-operated, external pilot and drain M30 x 1,5		Surface treatment A zinc-coated (ZnCr-3), ISO 9227 (240 h) B zinc-coated (ZnNi), ISO 9227 (520 h)	Seals No designation V NBR FPM (Viton)
Model internal pilot and drain external pilot, external drain internal pilot, external drain	S SX SY	Adjustment option allen key (hex. 6), without protective cap	S
	Pressure range 10 ... 420 bar (145 ...6100 PSI)		

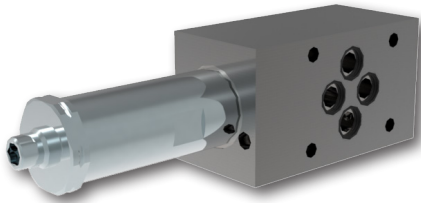Pressure Relief Valve, Spool Type, Pilot Operated, Modular

VPN1-06/M(R)


Size 04 (D02), 06 (D03) • Q_{max} 70 l/min (18.5 GPM) • p_{max} 320 bar (4600 PSI)



Technical Features


- › Pressure relief valve, spool type, pilot operated, with mounting interface acc. to ISO 4401, DIN 24340 (CETOP 02 and 03) or in-line design
- › Excellent stability throughout flow range with rapid response to dynamic pressure changes
- › Low hysteresis, accurate pressure control and low pressure drop
- › Wide pressure range up to 320 bar
- › High flow capacity
- › Hardened precision parts
- › Ideal for use as control valve where accuracy and repeatability is required
- › Adjustable by allen key or hand screw, optionally sealable (lockwire holes)
- › In the standard version, the valve housing is phosphated and steel parts are zinc-coated for 240 h protection acc. to ISO 9227

Functional Symbols

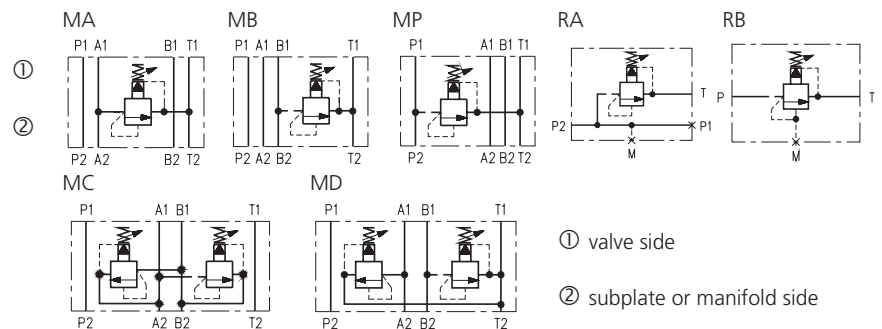


Notice: The orientation of the symbol on the name plate corresponds with the valve function.

ISO 4401-02-01-0-05

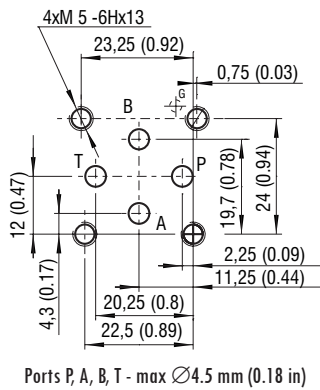

ISO 4401-03-02-0-05

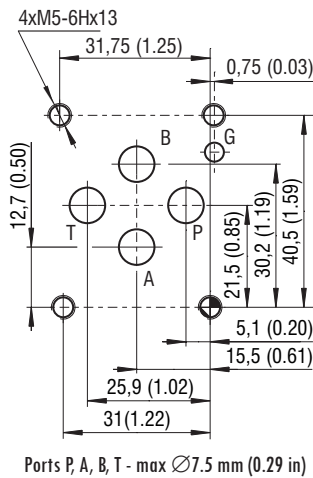


Technical Data

Valve size	04 (D02), 06 (D03)	
Max. flow	l/min (GPM)	70 (18.5)
Max. pressure (ports P, T)	bar (PSI)	320 (4640)
Fluid temperature range (NBR)	°C (°F)	-30...+100 (-22...+212)
Fluid temperature range (FPM)	°C (°F)	-20...+120 (-4...+248)
Weight - models MA (B, P) 04	kg (lbs)	0.82 (1.81)
- models MC (D) 04		1.32 (2.91)
- models MA (B, P) 06		1.2 (2.64)
- models MC (D) 06		1.5 (3.31)
- models RA1 (2), RB1 (2)		1.25 (2.76)
	Datasheet	Type
General information	GI_0060	Products operating conditions
Mounting interface	SMT_0019	Size 04 / 06
Spare parts	SP_8010	


Characteristics measured at v = 32 mm²/s (156 SUS)

Relief pressure related to flow rate

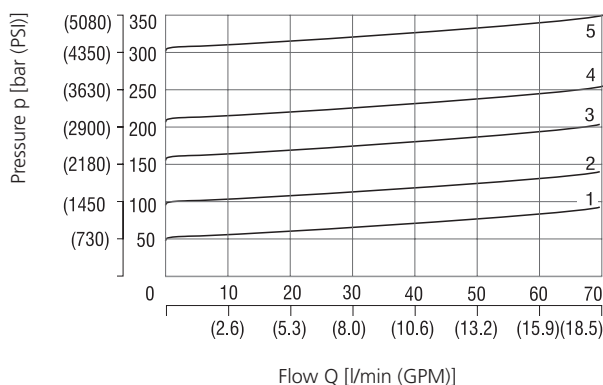

Pressure range	6	10	16	21	32
	1	2	3	4	5


Minimum set and circulation pressure

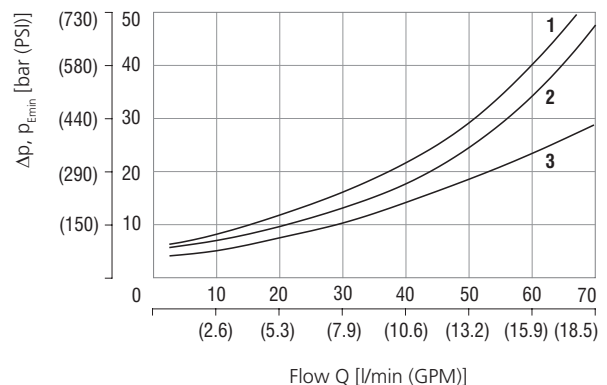


Models	MC	MA, MB, MP, MD	RA, RB
	1	2	3

Dimensions in millimeters (inches)

Model MA

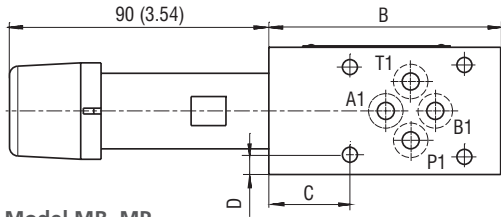


Model MC, MD

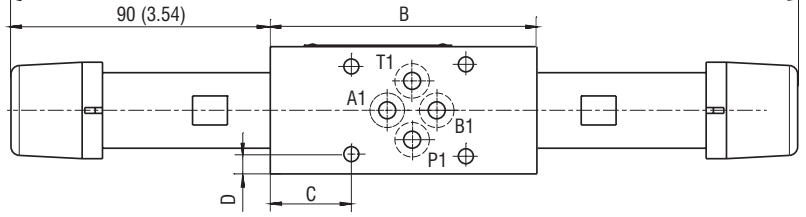

Model MB, MP



Size	04 (D02)	06 (D03)
MA, MB, MC, MD, MP		
D	6.25 (0.25)	7 (0.28)
E	34.6 (1.36)	40 (1.57)
F	35 (1.38)	45 (1.77)

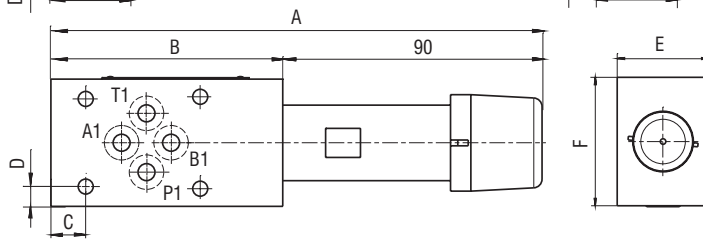



Version	Size	04 (D02)	06 (D03)
MA (B,P)	A	170 (6.70)	
MC (D)	A	284 (11.18)	274 (10.79)
MA (B,P)	B	80 (3.15)	
MC (D)	B	104 (4.09)	94 (3.70)
MA (C,D)	C	40 (1.57)	25.5 (1.0)
MB (P)	C	16 (0.63)	11.5 (0.45)

Model RA1, RA2

Model RB1, RB2

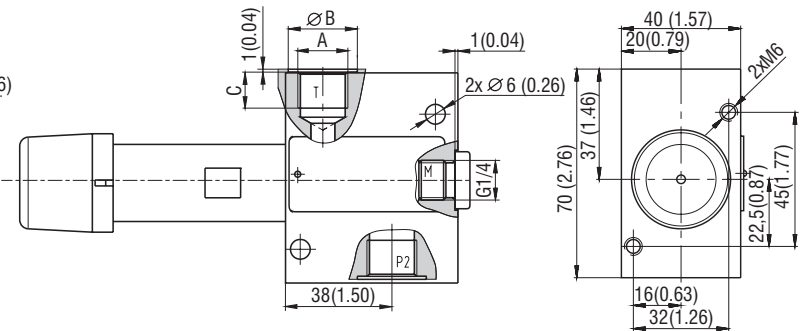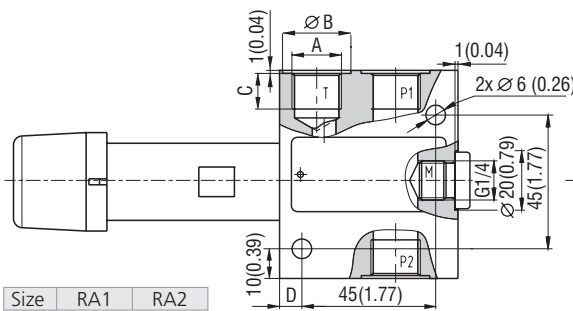

Size	RA1	RA2
E	60 (2.36)	70 (2.76)

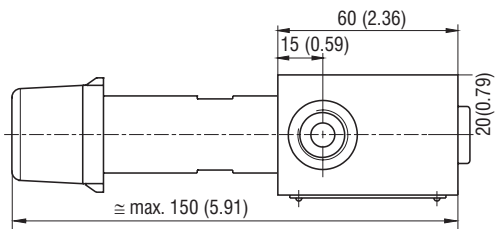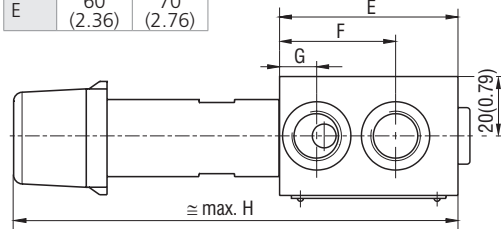

	RA1, RB1	RA2, RB2
A	G 3/8-A	G 1/2-A
B	Ø 23	Ø 28
C	12 (0.47)	14 (0.55)
D	7.5 (0.3)	18 (0.71)
F	39 (1.54)	46 (1.81)
G	12.5 (0.49)	16 (0.63)
H	117 (4.61)	127 (5.0)

Ordering Code

VPN1-06 / [] - [] - [] - [] - []

Pressure relief valve, spool type, pilot operated, modular

Model

- modular, valve from A to T **MA**
- modular, valve from B to T **MB**
- modular, valve from P to T **MP**
- modular, valve from A to B and B to A **MC**
- modular, valve from A to T and B to T **MD**
- in-line valve, three ports, thread G 3/8 (P1, P2, T) **RA1**
- in-line valve, three ports, thread G 1/2 (P1, P2, T) **RA2**
- in-line valve, two ports, thread G 3/8 (P, T) **RB1**
- in-line valve, two ports, thread G 1/2 (P, T) **RB2**

Modular plate size

- ISO 4401-02-01-0-05, DIN 24340 (CETOP 02), size 04 **04**
- ISO 4401-03-02-0-05, DIN 24340 (CETOP 03), size 06 **06**

Surface treatment
 No designation standard
A zinc-coated (ZnCr-3), ISO 9227 (240 h)
B zinc-coated (ZnNi, ISO 9227 (520 h)

Seals
 No designation NBR
V FPM (Viton)

Adjustment option*
S allen key (hex. 6), without protective cap
T allen key (hex. 6), with protective cap
RS hand screw, metal
RP hand screw, plastic
L allen key (hex. 6), with protective cap, sealable (lockwire holes)

Model with two pressure relief cartridges
S/RS A side, allen key (hex. 6), without protective cap
 B side, hand screw, metal


*for dimensions of adjustment options see data sheet No.5161

Pressure range
6 up to 63 bar (910 PSI)
10 up to 100 bar (1450 PSI)
16 up to 160 bar (2320 PSI)
21 up to 210 bar (3050 PSI)
32 up to 320 bar (4600 PSI)

Pressure Relief Valve, Spool Type, Pilot Operated, Modular

VPN2-10/M(R)


Size 10 (D05) • Q_{max} 150 l/min (40 GPM) • p_{max} 350 bar (5100 PSI)

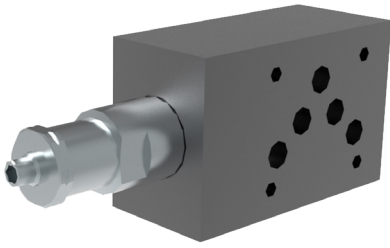

Technical Features


- › Pressure relief valve, spool type, pilot operated, with mounting interface acc. to ISO 4401, DIN 24340 (CETOP 05) or in-line design
- › Low hysteresis, accurate pressure control and low pressure drop
- › Wide pressure range up to 350 bar
- › High flow capacity
- › Hardened precision parts
- › Ideal for use as control valve where accuracy and repeatability is required
- › Adjustable by allen key or hand screw, optionally sealable (lockwire holes)
- › In the standard version, the valve housing is phosphated and steel parts are zinc-coated for 240 h protection acc. to ISO 9227

Functional Symbols

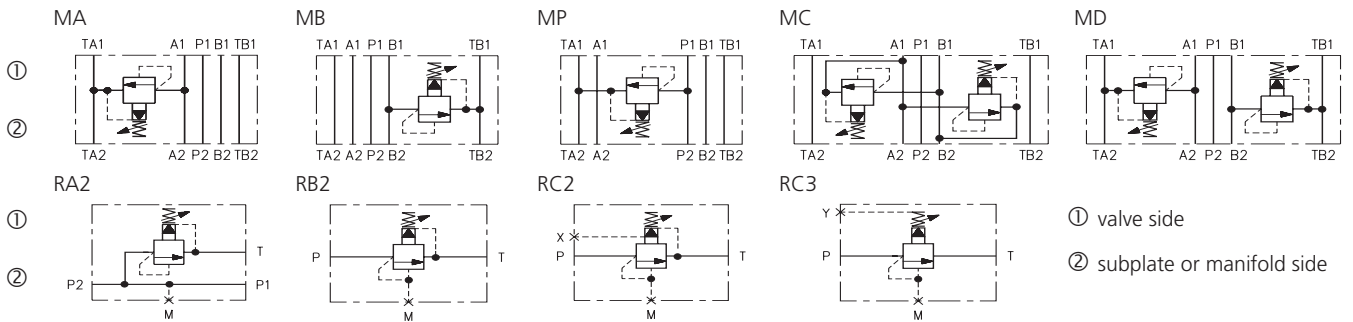

Notice: The orientation of the symbol on the name plate corresponds with the valve function.

ISO 4401-05-04-0-05

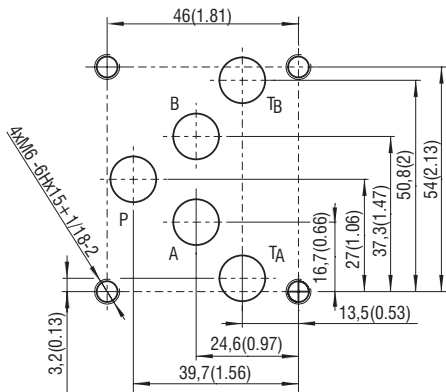

Ports P, A, B, T - max. \varnothing 11.2 mm (0.44 in)


Technical Data

Valve size	10 (D05)	
Max. flow	l/min (GPM)	150 (40)
Max. operating pressure	bar (PSI)	350 (5080)
Fluid temperature range (NBR)	$^{\circ}$ C ($^{\circ}$ F)	-30 ... +100 (-22 ... 212)
Fluid temperature range (FPM)	$^{\circ}$ C ($^{\circ}$ F)	-20 ... +120 (-4 ... 248)
Mass		
- models MA (B, P) 10	kg (lbs)	2.15 (4.74)
- models MC (D) 10		3.0 (6.61)
- models RA2, RB2, RC2 (3)		2.7 (5.95)

	Datasheet	Type
General information	GI_0060	Products and operating conditions
Mounting interface	SMT_0019	Size 10
Spare parts	SP_8010	


Characteristics measured at $v = 32 \text{ mm}^2/\text{s}$ (156 SUS)

Relief pressure related to flow rate

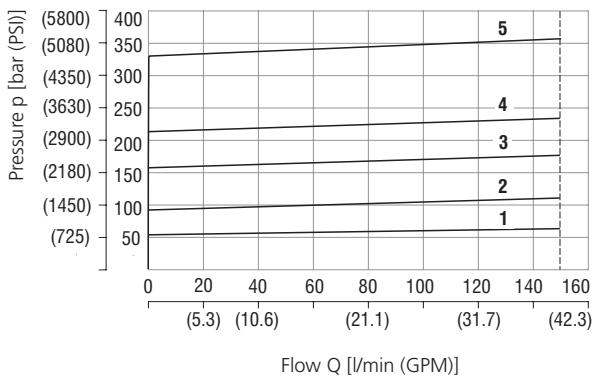

Pressure range	6	10	16	21	32
	1	2	3	4	5


Minimum set and circulation pressure

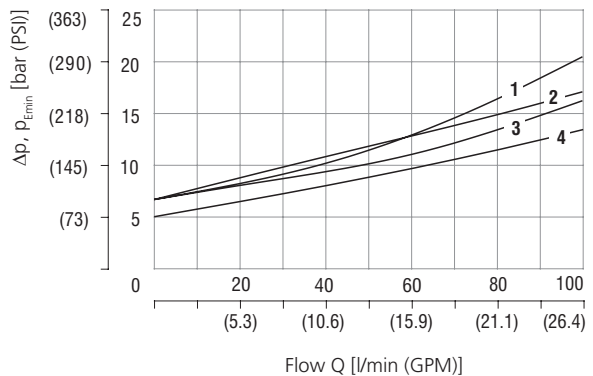


Models	MC	MP	MA, MB	RA, RB, RC
	1	2	3	4

Dimensions in millimeters (inches)


Model MA, MP

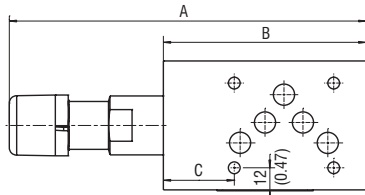

Model MC, MD

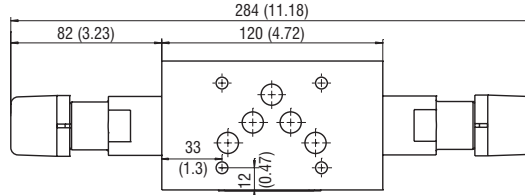


Model MB

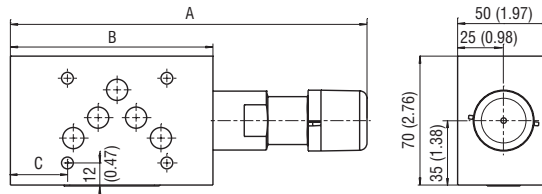


Size 10	A	B	C
MA	187 (7.36)	105 (4.13)	33 (1.30)
MB			38.5 (1.52)
MP	192 (7.56)	110 (4.33)	18 (0.71)


Model RA2

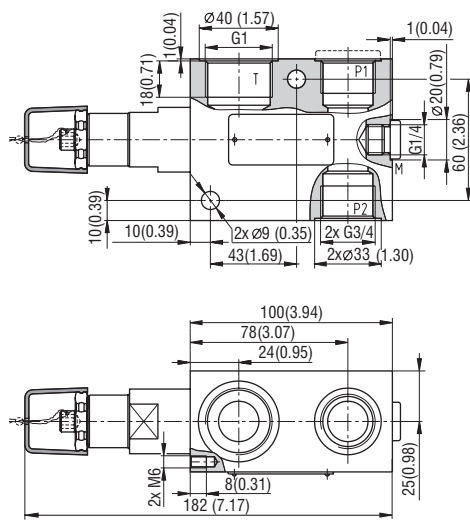

Model RB2

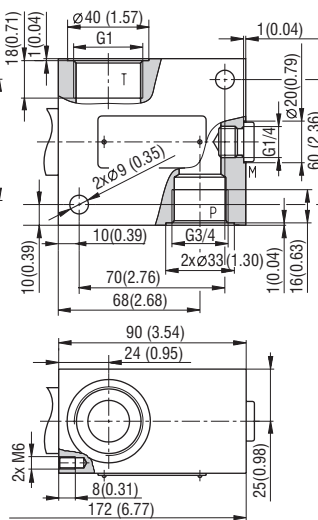

Model RC2, RC3

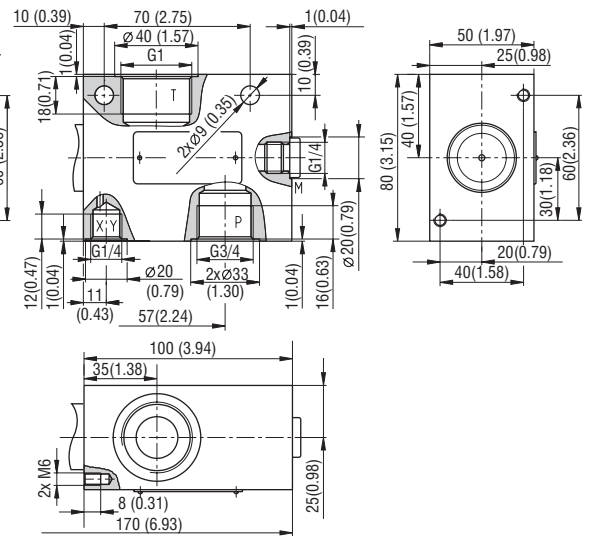

Ordering Code

VPN2-10 / [] - [] - [] - [] - []

Pressure relief valve, spool type, pilot operated, modular

Model

- modular, valve from A to TA **MA**
- modular, valve from B to TB **MB**
- modular, valve from P to TA **MP**
- modular, valve from A to B and B to A **MC**
- modular, valve from A to TA and B to TB **MD**
- in-line valve, three ports, thread P1, P2-G3/4, T-G1 **RA2**
- in-line valve, two ports, thread P-G3/4, T-G1 **RB2**
- in-line valve, two ports, thread P-G3/4, T-G1, X-G1/4 **RC2**
- in-line valve, two ports, thread P-G3/4, T-G1, Y-G1/4 **RC3**

Modular plate size

ISO 4401-05-04-0-05, DIN 24340 (CETOP 05), size 10 **10**

Surface treatment

- No designation** body phosphated, steel parts
zinc-coated (ZnCr-3), ISO 9227 (240 h)
- A** zinc-coated (ZnCr-3), ISO 9227 (240 h)
- B** zinc-coated (ZnNi, ISO 9227 (520 h))

Seals

- No designation** NBR
- V** FPM (Viton)

Adjustment option*

- S** allen key (hex. 6), without protective cap
- T** allen key (hex. 6), with protective cap
- RS** hand screw, metal
- RP** hand screw, plastic
- L** allen key (hex. 6), with protective cap, sealable (lockwire holes)
- Model with two pressure relief cartridges**
- S/RS** A side, allen key (hex. 6), without protective cap
- B side, hand screw, metal

*for dimensions of adjustment options see data sheet No.5163

Pressure range

- 6** up to 63 bar (910 PSI)
- 10** up to 100 bar (1450 PSI)
- 16** up to 160 bar (2320 PSI)
- 21** up to 210 bar (3050 PSI)
- 32** up to 320 bar (4600 PSI)



Model with two pressure relief cartridges

32/10 320 bar (4600 PSI) in port A, 100 bar (1450 PSI) in port B

Pressure relief solenoid-operated On/Off valve, direct acting

SR1E2-A2

3/4-16 UNF • Q_{max} 1.5 l/min (0.40 GPM) • p_{max} 350 bar (5100 PSI)

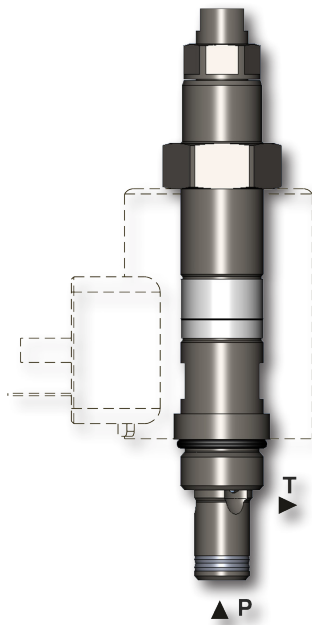

Technical Features

- › Screw-in cartridge direct acting pressure relief valve used as a pilot valve or a valve for small flow rate up to 1.5 l/min
- › Solenoid operated remote switching between minimum and maximum set pressure
- › Possible combined function of pressure relief and unloading valve
- › Five pressure ranges with a maximum settable pressure of 350 bar
- › Accurate pressure control
- › Easily interchangeable solenoid coil and easy connector positioning
- › In the standard version, the valve is zinc-coated with corrosion protection 240 h in NSS acc. to ISO 9227 the reinforced protection 520 h in NSS is designed for demanding environment

Functional Description

Screw-in cartridge pressure valve, direct acting, is used as a pilot valve for pressure valves SR4E2-B2 and SP4E1-B3 or as a direct acting pressure relief valve for small flow rate up to 1,5 l/min. The input system pressure is permanently compared with mechanically adjusted cracking pressure. The system pressure higher than set cracking pressure opens the valve and unloads the circuit by connection to the tank. The valve thus protects the connected circuit against pressure overloading. Additionally, it is possible to mechanically adjust two values of cracking pressure with the help of adjusting screws built into the end plug of the solenoid actuating system. The two set pressure values can be remotely switched by solenoid. When the solenoid is switched on the valve is set to maximum pressure. The maximum adjustable pressure is defined by pressure range of valve. The minimum circuit pressure can be set from 0 bar to the set maximum pressure. The valve can be used in two ways – as a switcher between two set pressure values or as a combined relief – unloading valve when one pressure value is adjusted on min. system pressure 7 bar.

The complete valve consists of direct acting poppet valve with connecting thread 3/4-16 UNF and a control solenoid with two adjusting screws.


CAUTION: A pressure change in T channel will cause a change of the set cracking pressure of 1:1.

Technical Data

Valve size / Cartridge cavity	3/4-16 UNF-2A / A2 (C-8-2)	
Max. flow	l/min (GPM)	1.5 (0.40)
Max. operating pressure (port P)	bar (PSI)	350 (5080)
Max. operating pressure (port T)	bar (PSI)	100 (1450)
Min. adjustable pressure	bar (PSI)	0
Fluid temperature range (NBR)	°C (°F)	-30 ... +80 (-22 ... 176)
Fluid temperature range (FPM)	°C (°F)	-20 ... +80 (-4 ... 176)
Ambient temperature range (NBR)	°C (°F)	-30 ... +50 (-22 ... 122)
Ambient temperature range (FPM)	°C (°F)	-20 ... +50 (-4 ... 122)
Supply voltage tolerance	%	AC, DC ± 10
Max. switching frequency	1/h	5 000
Weight	kg (lbs)	0.44 (0.97)
Mounting position: If possible, the valve should be mounted with the coil vertically downward.		
	Datasheet	Type
General information	GI_0060	Products and operating conditions
Coil types	C_8007	C 19B*
Valve bodies	In-line mounted	SB_0018
	Sandwich mounted	SB-04(06)_0028
Cavity details / Form tools	SMT_0019	SMT-A2*
Spare Parts	SP_8010	

Characteristics measured at $v = 32 \text{ mm}^2/\text{s}$ (156 SUS)


Relief pressure related to flow rate

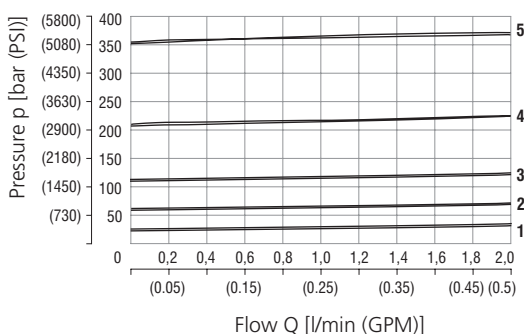

Pressure range	3	6	12	21	35
	1	2	3	4	5

Example showing the adjustable pressures p_1 and p_2 ($p_1 \geq p_2$)

p_1 (p_{max} , relief pressure) is set as the higher working pressure (solenoid energized)
 p_2 (p_{min} , vented pressure) is set as a lower working pressure (solenoid de-energized)

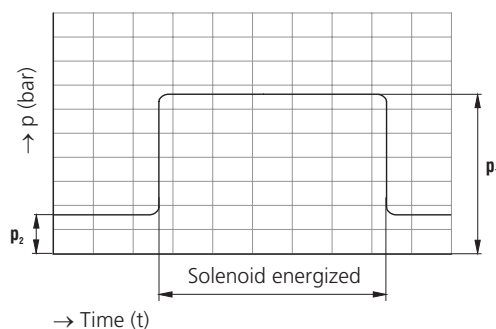


Characteristics measured at $v = 32 \text{ mm}^2/\text{s}$ (156 SUS)


Application example

Pressure drop related to flow rate

0 % of control current, P-T direction

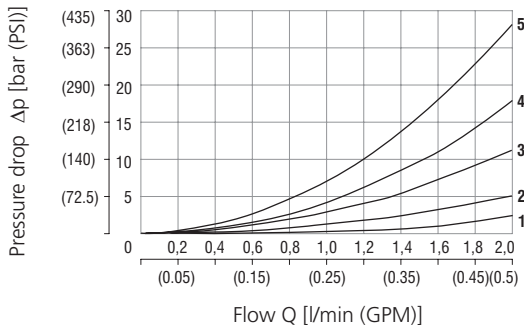


Pressure range	3	6	12	21	35
	1	2	3	4	5

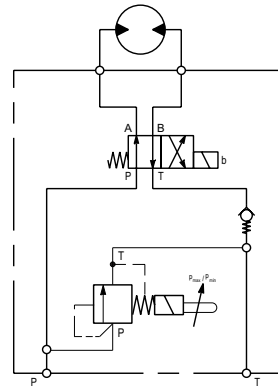

The valve is used to unload a pump to tank with a very low pressure drop. This results in less heating of the oil and therefore lower energy costs for the user.

p_1 (p_{max}) must be set before p_2 (p_{min}). To set p_1 , the solenoid is energized and the pressure adjusted with a flat wrench (size 10). The solenoid is then de-energized and the lower pressure adjusted with an allen key (hex. 3).

Dimensions in millimetres (in)

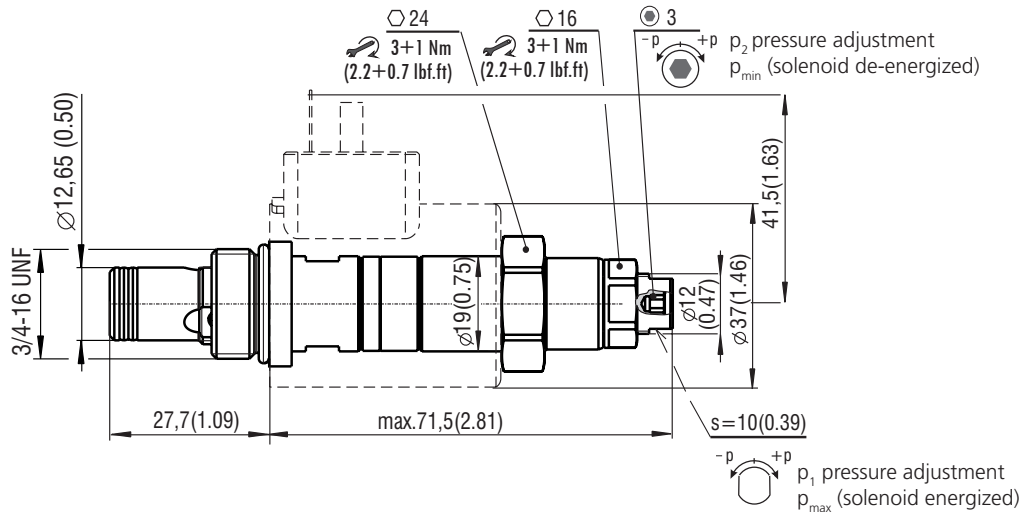

Ordering Code

SR1E2 - A2 / H -

Pressure relief solenoid-operated
On/Off valve, direct acting

Valve cavity
3/4-16 UNF (C-8-2)

Model
High performance

Max. reduced pressure
up to 30 bar (435 PSI) **3**
up to 60 bar (870 PSI) **6**
up to 120 bar (1740 PSI) **12**
up to 210 bar (3046 PSI) **21**
up to 350 bar (5076 PSI) **35**

No designation
V

Surface treatment


- A zinc-coated (ZnCr-3), ISO 9227 (240 h)
- B zinc-coated (ZnNi), ISO 9227 (520 h)

Seals
NBR
FPM (Viton)

Pressure relief solenoid-operated On/Off valve, piloted

SR4E2-B2

7/8-14 UNF • Q_{max} 80 l/min (21.1 GPM) • p_{max} 350 bar (5100 PSI)

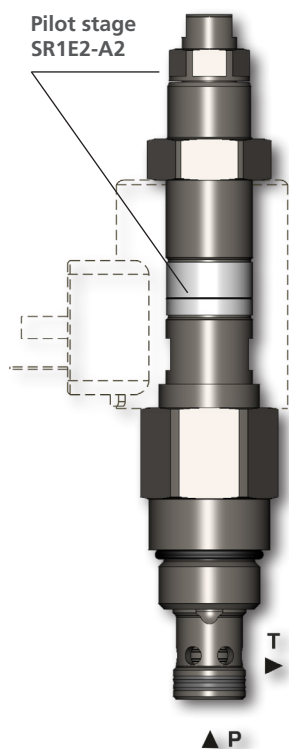

Technical Features

- › Screw-in cartridge pilot operated pressure relief valve
- › Solenoid operated remote switching between minimum and maximum set pressure
- › Possible combined function of pressure relief and unloading valve
- › Five pressure ranges with a maximum settable pressure of 350 bar
- › Excellent stability throughout the flow range to 80 l/min
- › Low hysteresis and accurate pressure control
- › Easily interchangeable solenoid coil and easy connector positioning
- › In the standard version, the valve is zinc-coated with corrosion protection 240 h in NSS acc. to ISO 9227. The reinforced protection 520 h in NSS is designed for demanding environment

Functional Description


Screw-in cartridge pressure relief valve, pilot operated, protects the connected circuit against pressure overloading. The input system pressure is permanently compared with mechanically adjusted cracking pressure. The system pressure higher than set cracking pressure opens the valve and unloads the circuit by connection to the tank. Additionally, it is possible to mechanically adjust two values of cracking pressure with the help of adjusting screws built into the end plug of the solenoid actuating system. The two set pressure values can be remotely switched by solenoid. When the solenoid is switched on the valve is set to maximum pressure. The maximum adjustable pressure is defined by pressure range of valve. The minimum circuit pressure can be set from 7 bar to the set maximum pressure. The valve can be used in two ways – as a switcher between two set pressure values or as a combined relief – unloading valve when one pressure value is adjusted on min. system pressure 7 bar.

The complete valve consists of direct acting poppet valve with, main spool valve with connecting thread 7/8-14 UNF and a control solenoid with two adjusting screws.

CAUTION: A pressure change in T channel will cause a change of the set cracking pressure of 1:1.


Technical Data

Valve size / Cartridge cavity	7/8-14 UNF-2A / B2 (C-10-2)	
Max. flow	l/min (GPM)	80 (21.1)
Max. operating pressure	bar (PSI)	350 (5080)
Max. pressure (port T)	bar (PSI)	100 (1450)
Min. adjustable pressure	bar (PSI)	7 (102)
Fluid temperature range (NBR)	°C (°F)	-30 ... +80 (-22 ... 176)
Fluid temperature range (FPM)	°C (°F)	-20 ... +80 (-4 ... 176)
Ambient temperature range (NBR)	°C (°F)	-30 ... +50 (-22 ... 122)
Ambient temperature range (FPM)	°C (°F)	-20 ... +50 (-4 ... 122)
Supply voltage tolerance	%	AC, DC ± 10
Max. switching frequency	1/h	5 000
Weight	kg (lbs)	0.57 (1.23)
Mounting position: If possible, the valve should be mounted with the coil vertically downward.		
General information		Datasheet
		GI_0060
Coil types		Type
		C_8007
Valve bodies	In-line mounted	SB_0018
	Sandwich mounted	SB-06_0028
Cavity details / Form tools		SMT_0019
Spare parts		SP_8010



Characteristics measured at $v = 32 \text{ mm}^2/\text{s}$ (156 SUS)

Relief pressure related to flow rate

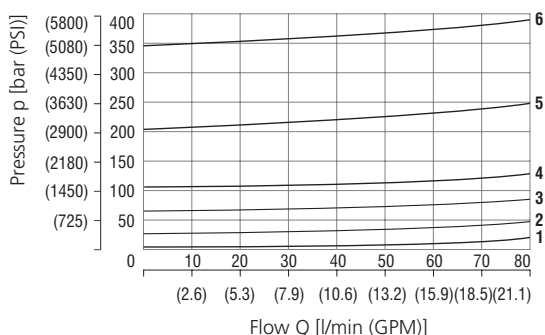


Pressure range	Min. pressure setting	3	6	12	21	35
1		2	3	4	5	6
Solenoid de-energized		Typical performance				

Example showing the adjustable pressures p_1 and p_2 ($p_1 \geq p_2$)

p_1 (p_{max} , relief pressure) is set as the higher working pressure (solenoid energized)



p_2 (p_{min} , vented pressure) is set as a lower working pressure (solenoid de-energized)

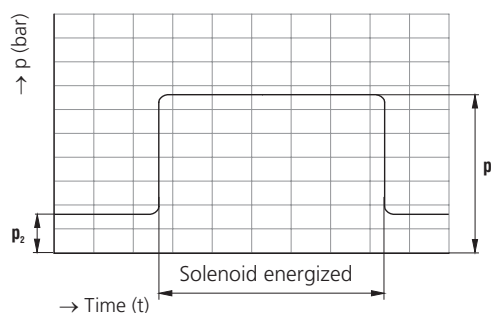

Characteristics measured at $v = 32 \text{ mm}^2/\text{s}$ (156 SUS)


Application example
Pressure drop related to flow rate

0 % of control current, P-T direction

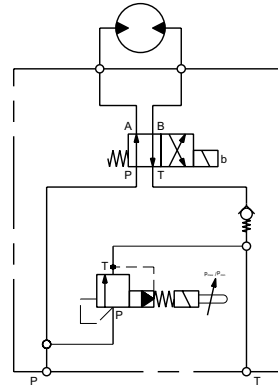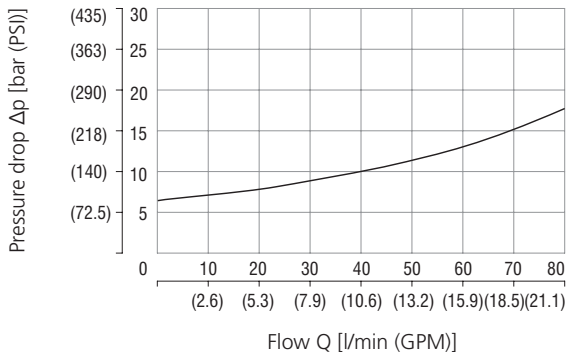

The valve is used to unload a pump to tank with a very low pressure drop. This results in less heating of the oil and therefore lower energy costs for the user.

p_1 (p_{max}) must be set before p_2 (p_{min}). To set p_1 , the solenoid is energized and the pressure adjusted with a flat wrench (size 10). The solenoid is then de-energized and the lower pressure adjusted with an allen key (hex. 3).

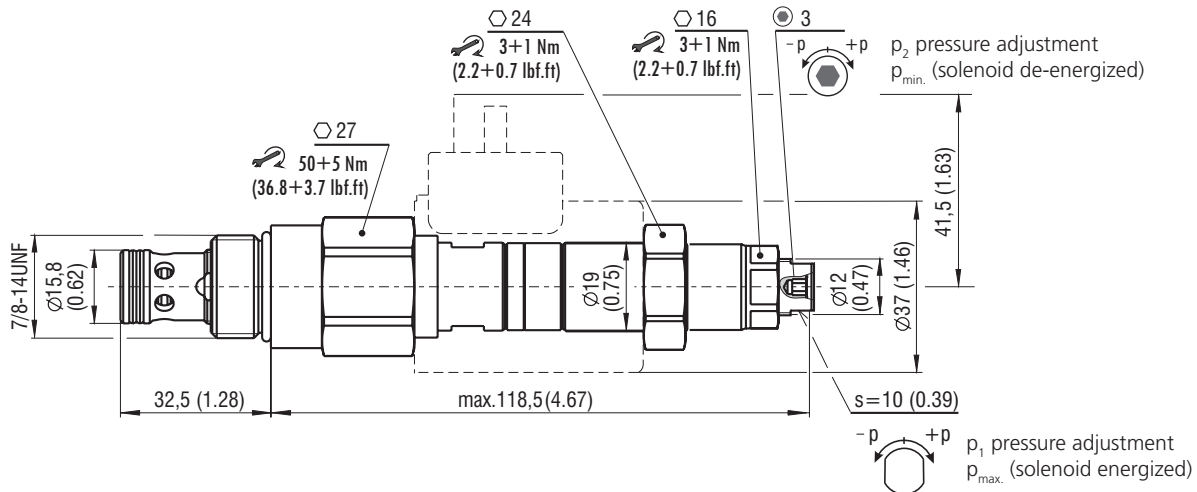Dimensions in millimeters (inches)

Ordering Code
SR4E2 - B2 / H
Pressure relief solenoid-operated On/Off valve, piloted
Valve cavity
7/8-14 UNF (C-10-2)

Model
High performance

Max. reduced pressure
 up to 30 bar (440 PSI) **3**
 up to 60 bar (870 PSI) **6**
 up to 120 bar (1740 PSI) **12**
 up to 210 bar (3050 PSI) **21**
 up to 350 bar (5080 PSI) **35**
Surface treatment
A zinc-coated (ZnCr-3), ISO 9227 (240 h)
B zinc-coated (ZnNi), ISO 9227 (520 h)

No designation
V
Seals
 NBR
 FPM (Viton)


Factory setting:

If the valve does not have a specific setting in accordance with the customer's order, standard valves are set to a minimum value of approx 7 bar after function tests.

Pressure Relief Valve with Reverse Flow Check, Poppet Type, Not Adjustable

DBV3

M24 x 1.5 • Q_{max} 200 l/min (53 GPM) • p_{max} 480 bar (7000 PSI)

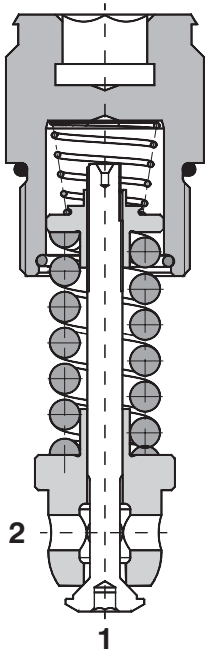


Technical Features

- › Excellent stability throughout flow range with rapid response to dynamic pressure changes
- › Low hysteresis, accurate pressure control and low pressure drop through CFD optimized flow paths
- › Adjustable pressure range 160-480 bar
- › Factory pre-set, non adjustable version only
- › Hardened precision parts
- › Sharp-edged steel seats for dirt-tolerant performance
- › Leak-free closing, suitable for fast cycling with long life
- › One-way bypass valve with suction function
- › In the standard version, the valve is zinc-coated for 240 h protection acc. to ISO 9227

Functional Description

A direct acting, poppet type hydraulic relief valve in the form of a screw-in cartridge with reverse flow check intended for use as a pressure limiting and anti-cavitation device for common hydraulic circuit protection. The spring acts on the poppet and presses it on the valve seat. If the hydraulic pressure is below the pre-set value, the valve is closed. If the hydraulic force exceeds the pre-set value, the valve opens and flow passes to the tank port until the system pressure drops below the spring pre-set value and the valve closes again.

Symbol




Technical Data

Valve size / Cartridge cavity		M24 x 1.5 / QH2
Max. flow	l/min (GPM)	200 (52.8)
Max. operating pressure	bar (PSI)	480 (6960)
Fluid temperature range (NBR)	°C (°F)	-30... + 100 (-22 ... +212)
Fluid temperature range (FPM)	°C (°F)	-20 ... +120 (-4 ... +248)
Weight	kg (lbs)	0.16 (0.36)
	Datasheet	Type
General information	GI_0060	Products and operating conditions
Cavity details	SMT_0019	SMT-QH2*
Spare parts	SP_8010	

Characteristics measured at $v = 32 \text{ mm}^2/\text{s}$ (156 SUS)

Relief pressure related to flow rate


Pressure relief function, flow direction 2 - 1

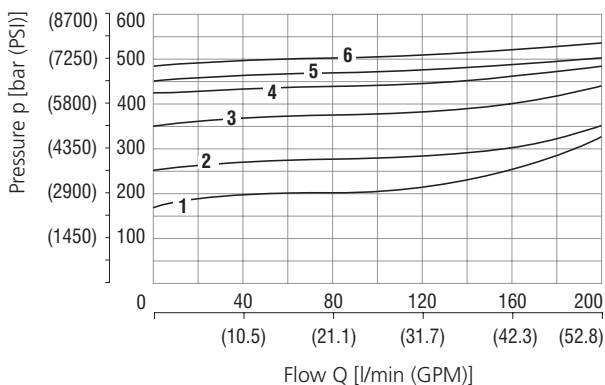


Pressure settings					
1	2	3	4	5	6
160	250	350	420	450	480

Pressure drop related to flow rate

Check valve function, flow direction 1 - 2

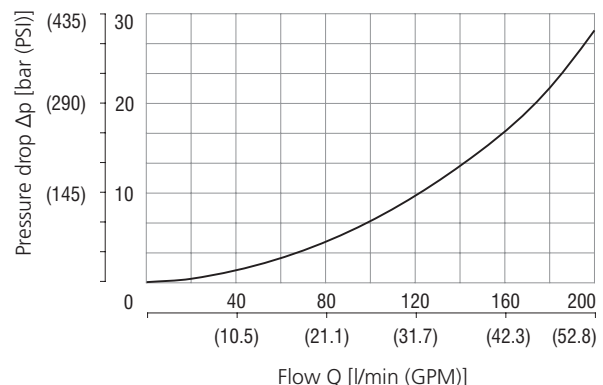

Dimensions in millimeters (inches)

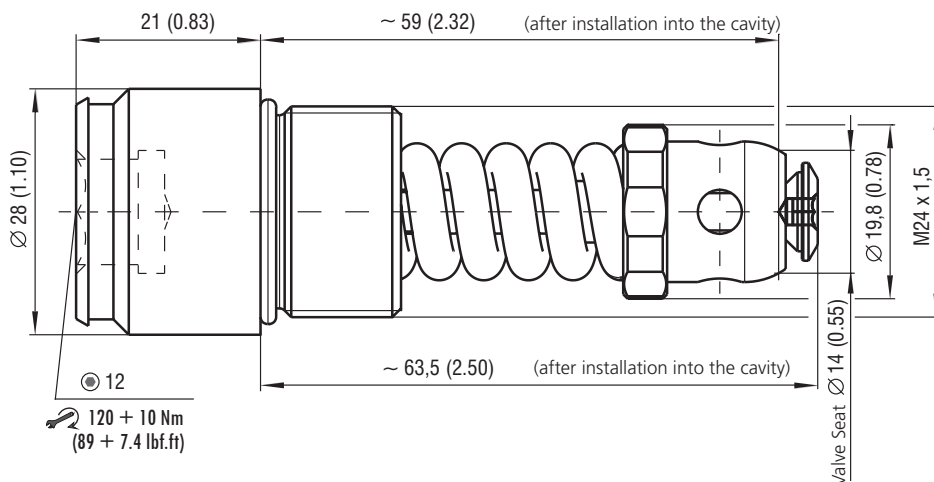

Ordering Code

DBV 3 - [] / 4 - [] - []		Surface treatment		
Pressure relief valve with reverse flow check, poppet type, direct acting, non-adjustable	Design stage	No designation	phosphated valve cup	
		A	zinc-coated (ZnCr-3), ISO 9227 (240 h)	
Pressure range	160	B	zinc-coated (ZnNi), ISO 9227 (520 h)	
	250	No designation	Seals	
	350			NBR
	420			FPM (Viton)
	450	M1	Model	
480	S1			M24 x 1.5
		SAE 12		

*All standard valves settings are at flow 4 l/min (1.06 GPM)