


Technical Information

Series 45

Axial Piston Open Circuit Pumps

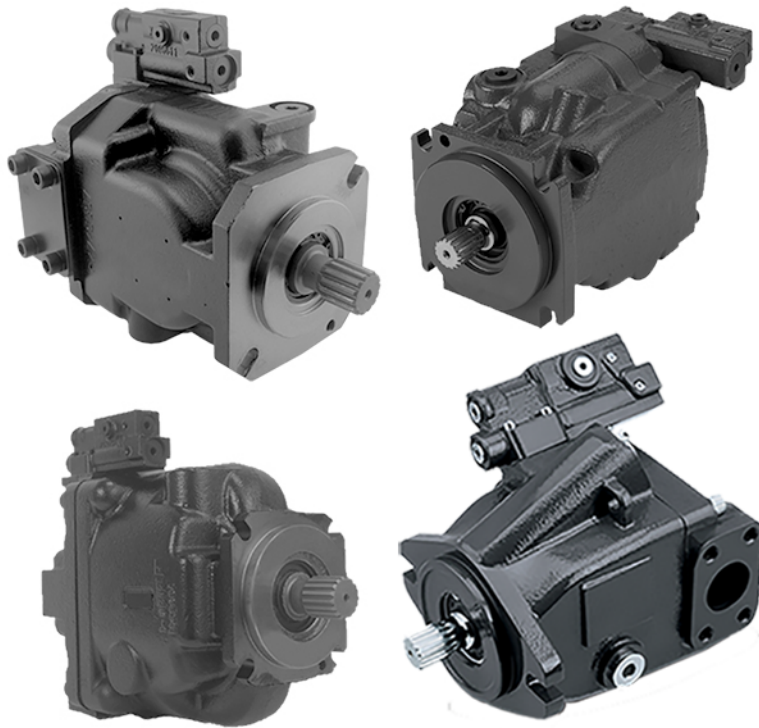

Revision history

Table of revisions

| Date | Changed | Rev |
|----------------|---|------------|
| January 2022 | Clarified importance of relief valve for system protection; added mounting flange technical data to frame F | 1201 |
| April 2021 | Added K2 040C displacement performance graphs | 1104 |
| June 2020 | Changed document number from 'BC00000019' and '520L0519' to 'BC152886483703' | 1103 |
| October 2019 | Added K2 040C displacement technical data | 1001 |
| July 2019 | Removed excess content | 0903 |
| June 2019 | Removed M1 ports from K2 schematics and other minor changes | 0902 |
| March 2018 | Minor updates | 0901 |
| September 2017 | Corrected performance curves for K2 Pumps | 0812 |
| August 2017 | Corrected typo | 0811 |
| April 2017 | Update the TOC | 0810 |
| March 2017 | add K2 Frame | 0809 |
| July 2016 | Fan Drive Control configuration-corrected G and H model code tables | 0808 |
| July 2016 | Fan Drive Control configuration-included G and H model code tables | 0807 |
| June 2016 | Various edits - Fan Drive Control | 0806 |
| April 2016 | Various edits - Fan Drive Control | 0805 |
| March 2016 | Add Fan Drive Control | 0804 |
| March 2015 | Add E Frame ETL control and Angle Sensor | HC |
| October 2014 | Add ETL control and Angle Sensor | HB |
| July 2014 | Danfoss layout | HA |

Contents

General Information

| | |
|---|----|
| Overview..... | 8 |
| Design..... | 8 |
| Benefits..... | 8 |
| Typical applications..... | 9 |
| The Series 45 product family..... | 9 |
| Load sensing open circuit system..... | 11 |
| Servo Control Orifice..... | 12 |
| Servo Control Orifice Principle..... | 12 |
| Servo Control Orifice Performance..... | 13 |
| Pacing Factor..... | 14 |
| Hydraulic Controls..... | 14 |
| Pressure compensated controls..... | 14 |
| Operation..... | 14 |
| Pressure compensated system characteristics..... | 15 |
| Typical applications for pressure compensated systems..... | 15 |
| Remote pressure compensated controls..... | 15 |
| Remote pressure compensated system characteristics..... | 16 |
| Typical applications for remote pressure compensated systems..... | 17 |
| Load sensing controls..... | 17 |
| LS control with bleed orifice..... | 17 |
| Integral PC function..... | 18 |
| Load sensing system characteristics..... | 18 |
| Electric Controls..... | 18 |
| Electric Proportional Controls (EPC)..... | 18 |
| PLUS+1® Compliance..... | 18 |
| Electric Proportional Control Principle..... | 18 |
| Electric Proportional Control Response/Recovery..... | 19 |
| Electric Proportional Control Characteristic – Normally Closed..... | 20 |
| Electric Proportional Control Characteristic – Normally Open..... | 21 |
| Electric On-Off Controls..... | 23 |
| PLUS+1 Compliance..... | 23 |
| Electric On-Off Control Principle..... | 23 |
| Electric On-Off Control Response/Recovery..... | 24 |
| Electric On-Off Control Performance vs. Ambient Temperature Characteristic..... | 24 |
| Electric On-Off Control Characteristic – Normally Closed..... | 25 |
| Electric On/Off Control Characteristic – Normally Open..... | 26 |
| Electric dump valve PC/LS controls..... | 27 |
| Electronic Torque Limiting Controls (ETL)..... | 27 |
| PLUS+1 Compliance..... | 27 |
| Electric Torque Limiting Control Principle..... | 28 |
| Electronic Torque Limiting Control Characteristic..... | 29 |
| Fan Drive Control (FDC)..... | 29 |
| PLUS+1 Compliance..... | 29 |
| Fan Drive Control Principle..... | 31 |
| Fan Drive Control System Characteristics..... | 31 |
| Unintended Applications for Fan Drive Control Systems..... | 32 |
| Fan Drive Control characteristic - Normally Closed..... | 32 |
| Solenoid data – Normally closed..... | 33 |
| Fan Drive Control configuration..... | 35 |
| NC Fan Drive Control 3D Views..... | 35 |
| Angle Sensor..... | 35 |
| PLUS+1 Compliance..... | 35 |
| Angle Sensor Principle..... | 36 |
| Angle Sensor Characteristics..... | 36 |
| J & F-Frame (45-90cc) Angle Sensor Identification Convention:..... | 37 |
| E-Frame (100-147cc) Angle Sensor Identification Convention:..... | 37 |
| Angle sensor electrical specifications..... | 40 |
| Angle Sensor Calibration..... | 40 |

Contents

| | |
|--|----|
| Angle Sensor Functionality..... | 40 |
| Charge Pump Circuits..... | 40 |
| Example Circuit #1..... | 40 |
| Example Circuit #2..... | 41 |
| Operating parameters..... | 42 |
| Fluids..... | 42 |
| Viscosity..... | 42 |
| Temperature..... | 42 |
| Inlet pressure..... | 43 |
| Case pressure..... | 43 |
| Pressure ratings..... | 44 |
| Speed ratings..... | 44 |
| Duty cycle and pump life..... | 44 |
| Speed, flow, and inlet pressure..... | 45 |
| Design parameters..... | 46 |
| Installation..... | 46 |
| Filtration..... | 46 |
| Reservoir..... | 46 |
| Fluid velocity..... | 46 |
| Shaft loads..... | 47 |
| Bearing life..... | 47 |
| Mounting flange loads..... | 48 |
| Estimating overhung load moments..... | 48 |
| Auxiliary mounting pads..... | 49 |
| Input shaft torque ratings..... | 49 |
| Understanding and minimizing system noise..... | 50 |
| Understanding and minimizing system instability..... | 50 |
| LS System Over-Signaling..... | 50 |
| Sizing equations..... | 51 |

Frame K2

| | |
|--|----|
| Design..... | 52 |
| Technical Specifications..... | 53 |
| Order Code..... | 53 |
| Performance K2-25C..... | 59 |
| Performance K2-30C..... | 60 |
| Performance K2-38C..... | 61 |
| Performance K2-40C..... | 62 |
| Performance K2-45C..... | 63 |
| Hydraulic Controls..... | 64 |
| Pressure Compensated Controls..... | 64 |
| Remote Pressure Compensated Controls..... | 65 |
| Load Sensing Pressure Compensated Controls..... | 66 |
| Load Sensing Control with Bleed Orifice /Pressure Compensated..... | 67 |
| Electric Controls..... | 68 |
| Connectors..... | 68 |
| Continuous Duty Operating Range..... | 68 |
| Solenoid Data - Normally Closed..... | 68 |
| Solenoid Data - Normally Open..... | 68 |
| Normally Closed Electric On/Off with Pressure Compensation Controls..... | 69 |
| Normally Open Electric On/Off with Pressure Compensation Controls..... | 69 |
| Normally Closed Electric Proportional with Pressure Compensation Controls..... | 71 |
| Normally Open Electric Proportional with Pressure Compensation Controls..... | 72 |
| Normally Closed Fan Drive Control..... | 73 |
| Input Shafts..... | 74 |
| Installation Drawings..... | 76 |
| Axial Ported Endcap..... | 76 |
| Axial Ported Endcap O-ring Boss Ports Installation Dimensions..... | 77 |
| Radial Ported Endcap Split Flange Ports..... | 78 |
| Radial Ported Endcap O-ring Boss Ports..... | 79 |

Contents

| | |
|---|----|
| Radial Ported Endcap Installation Dimensions..... | 80 |
| Front Mounting Flange - SAE-B two bolt..... | 80 |
| Auxiliary Mounting Pads..... | 81 |
| SAE-A auxiliary mounting pad..... | 81 |
| SAE-B auxiliary mounting pad..... | 81 |
| SAE-A Fixed flange..... | 82 |
| Auxiliary Mounting Pad - Running Cover..... | 82 |
| Electric solenoid, left side..... | 83 |
| Fan drive control..... | 83 |
| Displacement Limiter..... | 83 |

Frames L and K

| | |
|---|-----|
| Design..... | 85 |
| Technical Specifications..... | 86 |
| Order code..... | 86 |
| Performance L25C..... | 92 |
| Performance L30D..... | 93 |
| Performance K38C..... | 94 |
| Performance K45D..... | 95 |
| Hydraulic Controls..... | 96 |
| Pressure Compensated Controls..... | 96 |
| Remote Pressure Compensated Controls..... | 96 |
| Load Sensing/Pressure Compensated Controls..... | 97 |
| Load Sensing Control with Bleed Orifice /Pressure Compensated..... | 98 |
| Electric Controls..... | 99 |
| Connector..... | 99 |
| Continuous Duty Operating Range..... | 100 |
| Solenoid Data - Normally Closed..... | 100 |
| Solenoid Data - Normally Open..... | 100 |
| Normally Closed Electric On/Off with Pressure Compensation Controls..... | 100 |
| Normally Open Electric On/Off with Pressure Compensation Controls..... | 101 |
| Normally Closed Electric Proportional Controls with PC and LS Compensation..... | 102 |
| Normally Open Electric Proportional Controls with PC and LS Compensation..... | 104 |
| Input shafts..... | 106 |
| Installation drawings..... | 107 |
| Axial Ported Endcap..... | 107 |
| Axial Ported Endcap Installation Dimensions..... | 108 |
| Radial Ported Endcap Split Flange Ports..... | 108 |
| Radial Ported Endcap O-ring Boss Ports..... | 109 |
| Radial Ported Endcap Rear View..... | 109 |
| Radial Ported Endcap Installation Dimensions..... | 110 |
| Front Mounting Flange - SAE-B two bolt..... | 110 |
| Auxiliary Mounting Pads..... | 111 |
| SAE-A auxiliary mounting pad..... | 111 |
| SAE-B auxiliary mounting pad..... | 111 |
| Auxiliary Mounting Pad - Running Cover..... | 112 |
| Electric Solenoid, Left Side..... | 112 |
| Electric Solenoid, Right Side..... | 112 |
| Displacement limiter..... | 113 |

Frame J

| | |
|-------------------------------|-----|
| Design..... | 114 |
| Technical Specifications..... | 115 |
| Order code..... | 115 |
| Performance J45B..... | 126 |
| Performance J51B..... | 127 |
| Performance J60B..... | 128 |
| Performance J65C..... | 129 |
| Performance J75C..... | 130 |
| Hydraulic Controls..... | 131 |

Contents

| | |
|---|-----|
| Pressure Compensated Controls..... | 131 |
| Remote Pressure Compensated Controls..... | 132 |
| Load sensing/Pressure compensated Controls..... | 133 |
| Load sensing Control with Bleed Orifice/ Pressure Compensated..... | 134 |
| Electric Controls..... | 135 |
| Connectors..... | 135 |
| Continuous Duty Operating Range..... | 135 |
| Solenoid Data - Normally Closed..... | 135 |
| Solenoid Data - Normally Open..... | 135 |
| Fan Drive Control Solenoid Data - Normally Closed..... | 136 |
| Normally Closed Electric On/Off with Pressure Compensation Controls..... | 136 |
| Normally Open Electric On/Off with Pressure Compensation Controls..... | 137 |
| Normally Closed Electric Proportional with Pressure Compensation Controls..... | 138 |
| Normally Open Electric Proportional with Pressure Compensation Controls..... | 139 |
| Normally Closed Electric Torque Limiting Control with Pressure Compensation Controls..... | 141 |
| Normally Closed Fan Drive Control | 142 |
| Input shafts..... | 143 |
| Installation drawings..... | 146 |
| Axial Ported Endcap..... | 146 |
| Axial Ported Endcap Installation Dimensions..... | 147 |
| Right Fan Drive Control..... | 148 |
| Radial Ported Endcap Split Flange Ports..... | 148 |
| Radial Ported Endcap Rear View..... | 149 |
| Radial Ported Endcap Installation Dimensions..... | 150 |
| Right Angle Sensor Position Installation Dimensions..... | 151 |
| Front Mounting Flange..... | 152 |
| Auxiliary mounting pads..... | 153 |
| SAE-A auxiliary mounting pad (integrated)..... | 153 |
| SAE-A auxiliary mounting pad (non-integral)..... | 154 |
| SAE-B auxiliary mounting pad..... | 155 |
| SAE-C auxiliary mounting pad..... | 155 |
| Running cover..... | 156 |
| Radial Endcap Clockwise..... | 156 |
| Radial Endcap Counterclockwise..... | 157 |
| Axial Endcap Clockwise..... | 157 |
| Axial Endcap Counterclockwise..... | 157 |
| Displacement limiter..... | 158 |

Frame F

| | |
|---|-----|
| Design..... | 159 |
| Technical Specifications..... | 160 |
| Order code..... | 160 |
| Performance F74B..... | 166 |
| Performance F90C..... | 167 |
| Hydraulic Controls..... | 168 |
| Pressure Compensated Controls..... | 168 |
| Remote Pressure Compensated Controls..... | 168 |
| Load Sensing/Pressure Compensated Controls..... | 169 |
| Load Sensing Control with Bleed Orifice/Pressure Compensated..... | 170 |
| Electric Controls..... | 171 |
| Connectors..... | 171 |
| Continuous Duty Operating Range..... | 172 |
| Solenoid Data - Normally Closed..... | 172 |
| Solenoid Data - Normally Open..... | 172 |
| Fan Drive Control Solenoid Data - Normally Closed..... | 172 |
| Normally Closed Electric On/Off with Pressure Compensation Controls..... | 172 |
| Normally Open Electric On/Off with Pressure Compensation Controls..... | 173 |
| Normally Closed Electric Proportional with Pressure Compensation Controls..... | 174 |
| Normally Open Electric Proportional with Pressure Compensation Controls..... | 175 |
| Normally Closed Electric Torque Limiting Control with Pressure Compensation Controls..... | 177 |

Contents

| | |
|--|-----|
| Normally Closed Fan Drive Control..... | 178 |
| Input shafts..... | 179 |
| Installation drawings..... | 180 |
| Axial Ported Endcap..... | 180 |
| Axial Ported Endcap Installation Dimensions..... | 180 |
| Right Fan Drive Control..... | 181 |
| Radial Ported Endcap Split Flange Ports..... | 181 |
| Radial Ported Endcap Rear View..... | 182 |
| Radial Ported Endcap Installation Dimensions..... | 183 |
| Right Angle Sensor Position Installation Dimensions..... | 184 |
| Front Mounting Flange..... | 185 |
| Radial Endcap Clockwise..... | 187 |
| Radial Endcap Counterclockwise..... | 188 |
| Axial Endcap Clockwise..... | 188 |
| Axial Endcap Counterclockwise..... | 188 |
| Displacement limiter..... | 188 |

Frame E

| | |
|---|-----|
| Design..... | 190 |
| Technical Specifications..... | 191 |
| Order code..... | 191 |
| Performance E100B..... | 198 |
| Performance E130B..... | 199 |
| Performance E147C..... | 200 |
| Hydraulic Controls..... | 201 |
| Pressure Compensated Controls..... | 201 |
| Remote Pressure Compensated Controls..... | 201 |
| Load Sensing/Pressure Compensated..... | 202 |
| Load Sensing Control with Bleed Orifice/Pressure Compensated..... | 203 |
| Electric Controls..... | 204 |
| Connectors..... | 204 |
| Continuous Duty Operating Range..... | 205 |
| Solenoid Data - Normally Closed..... | 205 |
| Solenoid Data - Normally Open..... | 205 |
| Normally Closed Electric On/Off with Pressure Compensation Controls..... | 205 |
| Normally Open Electric On/Off with Pressure Compensation Controls..... | 206 |
| Normally Closed Electric Proportional with Pressure Compensation Controls..... | 207 |
| Normally Open Electric Proportional with Pressure Compensation Controls..... | 209 |
| Normally Closed Electric Torque Limiting Control with Pressure Compensation Controls..... | 210 |
| Input shafts..... | 212 |
| Installation drawings..... | 213 |
| Axial Ported Endcap..... | 213 |
| Axial Ported Endcap Installation Dimensions..... | 214 |
| Radial Ported Endcap Installation Dimensions..... | 215 |
| Right Angle Sensor Position Installation Dimensions..... | 216 |
| Radial Ported Endcap Rear View..... | 217 |
| Radial Ported Endcap Split Flange Ports..... | 217 |
| Front Mounting Flange..... | 218 |
| Endcap Dimensions..... | 219 |
| Auxiliary mounting pads..... | 220 |
| Displacement Limiters..... | 222 |

General Information

Overview

Series 45 is a complete family of high performance variable displacement, axial piston pumps. Each frame is designed to exceed the demanding work function requirements of the mobile equipment marketplace. Each frame within the Series 45 family is uniquely designed to optimize performance, size, and cost.

Design

High Performance

- Displacements from 25 cm³ - 147 cm³ [1.53 - 8.97 in³/rev]
- Speeds up to 3600 rpm
- Pressures up to 310 bar [4495 psi]
- Variety of control system options including load sensing and pressure compensated

Latest Technology

- Customer-driven using quality function deployment (QFD) and design for manufacturability (DFM) techniques
- Optimized design maximizes efficiency and quiet operation
- Computer-modeled castings to optimize inlet conditions for maximum pump speed
- Compact package size minimizing installation space requirements
- Heavy-duty tapered roller bearings for long life
- Single piece rigid housing to reduce noise and leak paths
- Integrated controls for high speed response and system stability

Reliability

- Designed to rigorous standards
- Proven in both laboratory and field
- Manufactured to rigid quality standards
- Long service life
- Significantly fewer parts
- No gasket joints
- Robust input shaft bearings to handle large external shaft loads
- Integrated gauge ports for monitoring operating conditions

Benefits

Reduced Installation Costs

- Through-drive capability for multi-circuit systems
- Range of mounting flanges, shafts and porting options for ease of installation
- Compact size minimizes installation space requirements
- Help meet engine emission standards
- Reduce engine size by managing power usage more effectively

Reduce Operating Costs

- Optimize machine power usage to maximize fuel economy
- Simple design reduces service requirements
- Heavy duty taper roller shaft bearings provide long service life

General Information

Increased Customer Satisfaction

- Reduced noise for operator comfort
- High performance increases productivity

Reduced Heat Load on Cooling System

- High efficiency reduces hydraulic heat generation
- Allows for smaller cooling packages

Typical applications


- Cranes
- Telescopic handlers
- Forklift trucks
- Wheel loaders
- Sweepers
- Backhoe loaders
- Forestry and agricultural machinery
- Fan drives
- Paving Machines
- Mining Equipment
- Mowers
- Dozers
- Drilling Machines
- Mini-Excavators
- Other Applications

The Series 45 product family

Basic units

The series 45 family of open circuit, variable piston pumps, offers a range of displacements from 25 to 147 cm³/rev [1.53 to 8.97 in³/rev]. With maximum speeds up to 3600 rpm and continuous operating pressures up to 310 bar [4495 psi], product selection is easily tailored to the flow and pressure requirements of individual applications.

K2 Frame



J Frame



F Frame



E Frame



General Information

General performance specifications

| Pump | | Displacement | | Speed | | | Pressure | | | | Theoretical flow (at rated speed) | | Mounting |
|----------|--------|-----------------|-----------------|-------------------------|-------------------------|-------------------------|----------|------|------|------|-----------------------------------|-------|------------------------------------|
| | | | | Continuous | Max. | Min. | Cont. | | Max. | | | | |
| Frame | Model | cm ³ | in ³ | min ⁻¹ (rpm) | min ⁻¹ (rpm) | min ⁻¹ (rpm) | bar | psi | bar | psi | US gal/min | l/min | Flange |
| Frame L | L25C | 25 | 1.53 | 3200 | 3600 | 500 | 260 | 3770 | 350 | 5075 | 21.0 | 80.0 | SAE B - 2 bolt |
| | L30D | 30 | 1.83 | 3200 | 3600 | 500 | 210 | 3045 | 300 | 4350 | 25.4 | 96.0 | SAE B - 2 bolt |
| Frame K | K38C | 38 | 2.32 | 2650 | 2800 | 500 | 260 | 3770 | 350 | 5075 | 26.6 | 100.7 | SAE B - 2 bolt |
| | K45D | 45 | 2.75 | 2650 | 2800 | 500 | 210 | 3045 | 300 | 4350 | 31.5 | 119.3 | SAE B - 2 bolt |
| Frame K2 | K2-25C | 25 | 1.53 | 3450 | 3750 | 500 | 260 | 3771 | 350 | 5076 | 22.8 | 86.3 | SAE B - 2 bolt |
| | K2-30C | 30 | 1.83 | 3200 | 3450 | 500 | | | | | 25.4 | 96.0 | SAE B - 2 bolt |
| | K2-38C | 38 | 2.32 | 2900 | 3050 | 500 | | | | | 29.1 | 110.2 | SAE B - 2 bolt |
| | K2-40C | 40 | 2.44 | 3100 | 3200 | 500 | | | | | 34.5 | 124 | SAE B - 2 bolt |
| | K2-45C | 45 | 2.75 | 2900 | 3050 | 500 | | | | | 34.5 | 130.5 | SAE B - 2 bolt |
| Frame J | J45B | 45 | 2.75 | 2800 | 3360 | 500 | 310 | 4495 | 400 | 5800 | 33.3 | 126.0 | SAE B 2-bolt SAE C 2 and 4-bolt |
| | J51B | 51 | 3.11 | 2700 | 3240 | 500 | 310 | 4495 | 400 | 5800 | 36.4 | 137.7 | SAE B 2-bolt SAE C 2 and 4-bolt |
| | J60B | 60 | 3.66 | 2600 | 3120 | 500 | 310 | 4495 | 400 | 5800 | 41.2 | 156.0 | SAE B 2-bolt SAE C 2 and 4-bolt |
| | J65C | 65 | 3.97 | 2500 | 3000 | 500 | 260 | 3770 | 350 | 5075 | 42.9 | 162.6 | SAE B 2-bolt SAE C 2 and 4-bolt |
| | J75C | 75 | 4.58 | 2400 | 2880 | 500 | 260 | 3770 | 350 | 5075 | 47.5 | 180.0 | SAE B 2-bolt SAE C 2 and 4-bolt |
| Frame F | F74B | 74 | 4.52 | 2400 | 2800 | 500 | 310 | 4495 | 400 | 5800 | 46.9 | 177.6 | SAE B 2-bolt SAE C 4-bolt |
| | F90C | 90 | 5.49 | 2200 | 2600 | 500 | 260 | 3770 | 350 | 5075 | 52.3 | 198 | SAE B 2-bolt SAE C 4-bol |

General Information

General performance specifications (continued)

| Pump | | Displacement | | Speed | | | Pressure | | | | Theoretical flow (at rated speed) | | Mounting |
|---------|-------|-----------------|-----------------|----------------------------|----------------------------|----------------------------|----------|------|------|------|-----------------------------------|-------|--------------|
| | | | | Continu- ous | Max. | Min. | Cont. | | Max. | | | | |
| Frame | Model | cm ³ | in ³ | min ⁻¹ (rpm) | min ⁻¹ (rpm) | min ⁻¹ (rpm) | bar | psi | bar | psi | US gal/min | l/min | Flange |
| Frame E | E100B | 100 | 6.10 | 2450 | 2880 | 500 | 310 | 4495 | 400 | 5800 | 64.7 | 245.0 | SAE C 4-bolt |
| | E130B | 130 | 7.93 | 2200 | 2600 | 500 | 310 | 4495 | 400 | 5800 | 75.5 | 286.0 | SAE C 4-bolt |
| | E147C | 147 | 8.97 | 2100 | 2475 | 500 | 260 | 3770 | 350 | 5075 | 81.5 | 308.7 | SAE C 4-bolt |

Load sensing open circuit system


The pump receives fluid directly from the reservoir through the inlet line. A screen in the inlet line protects the pump from large contaminants. The pump outlet feeds directional control valves such as PVG-32's, hydraulic integrated circuits (HIC), and other types of control valves. The PVG valve directs pump flow to cylinders, motors and other work functions. A heat exchanger cools the fluid returning from the valve. A filter cleans the fluid before it returns to the reservoir.

Flow in the circuit determines the speed of the actuators. The position of the PVG valve determines the flow demand. A hydraulic pressure signal (LS signal) communicates demand to the pump control. The pump control monitors the pressure differential between pump outlet and the LS signal, and regulates servo pressure to control the swashplate angle. Swashplate angle determines pump flow.

Actuator load determines system pressure. The pump control monitors system pressure and will decrease the swashplate angle to reduce flow if system pressure reaches the PC setting. A secondary system relief valve in the PVG valve acts as a back-up to control system pressure.

General Information

Pictorial circuit diagram

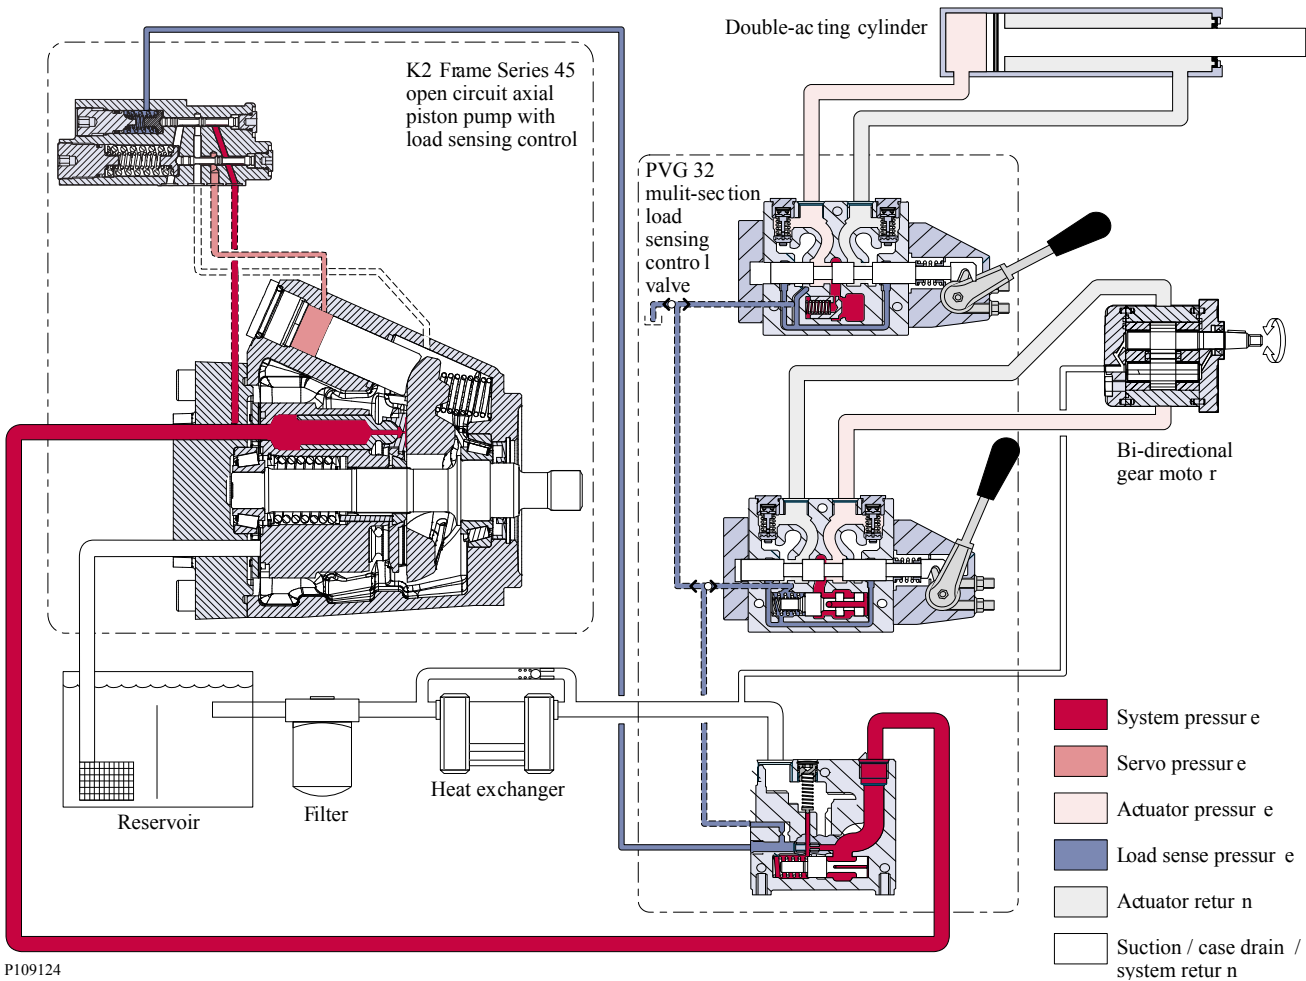


P109124

Servo Control Orifice

Servo Control Orifice Principle

Series 45 controls offer an optional servo control orifice (not available with Pressure Compensation only Controls) available to aid in tuning system performance. The optional servo control orifice restricts flow to and from the servo system in the pump, effectively pacing the motion of the servo system.

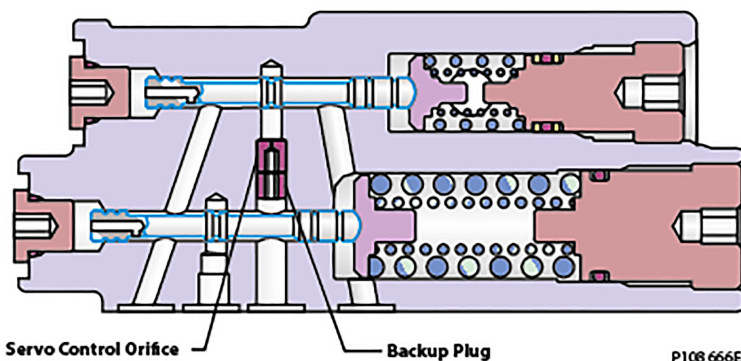

P108666E


General Information

Servo Control Orifice Performance

The use of the Servo Control Orifice will provide additional pacing to the pump, while the response of the pump to pressure spikes remains unaffected. The Pressure Compensation Function response and recovery, as well as the Load Sense Function response and recovery are shown below, and outline the relative impact in response and recovery of the Servo Control Orifices. Note that these graphs are meant as a generic comparison only, and that unique effects on response and recovery behavior for each specific frame are shown later in this section.


**Relative Servo Control Orifice Performance
 Generic PC Response and Recovery**

Input Speed=1800rpm, Temperature=49°C, PC Setting=210Bar, LS Setting=20Bar

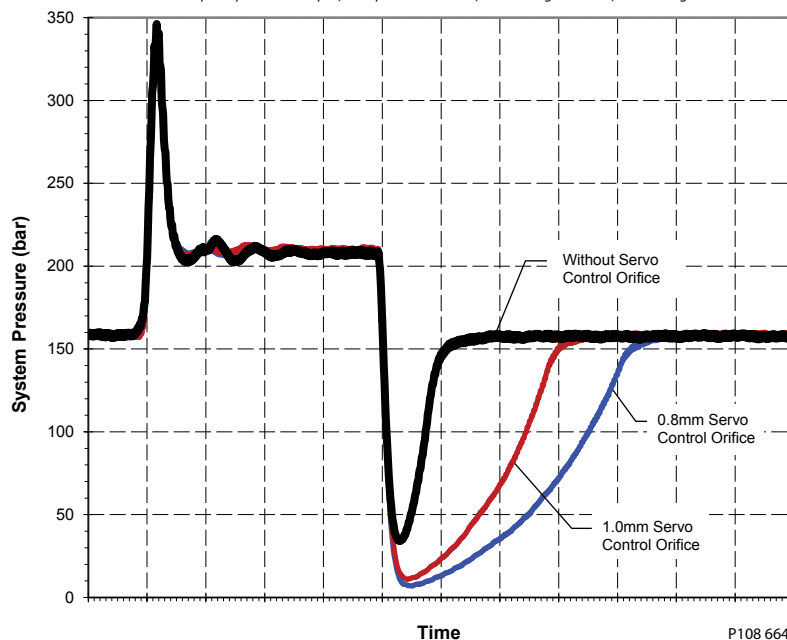

**Relative Servo Control Orifice Performance
 Generic LS Response and Recovery**

Input Speed = 1800rpm, Temperature=49 C, PC Setting=310Bar, LS Setting=30Bar

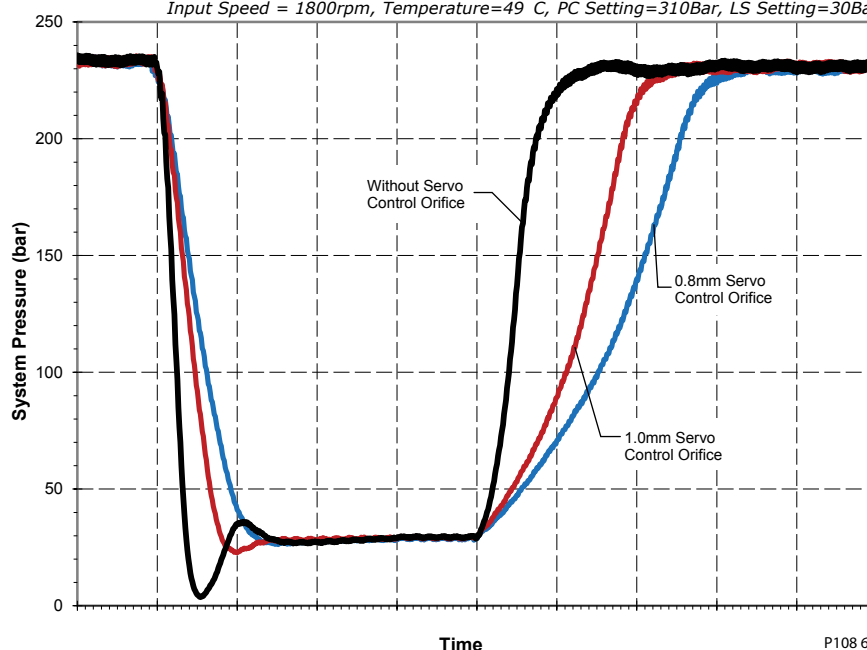

General Information

We recommend that systems experiencing instability use a Servo Control Orifice. Start with the largest size orifice available, and work down to the smaller size until the system is satisfactorily tuned. All Fan-Drive systems should start with a 0.8mm Servo Control Orifice if possible. Systems including motors are more likely to require the Servo Control Orifice option.

Pacing Factor

Use of a Servo Control Orifice adds a pacing factor to each Series 45 Frame, impacting the behavior of the pumps reactivity. This pacing factor can be multiplied by the specific Frame/Displacement/Control selection's response and recovery times, to determine the final paced response and recovery times. Unique response and recovery times can be found in each frame-specific chapter, in the desired control section. The paced response and recovery relationship is shown below.

Response (Damped)= Response (Specific Disp.Control) *Pacing Factor

Recovery (Damped)= Recovery (Specific Disp.Control) *Pacing Factor

Pacing Factors are unique to each orifice size, and can impact each frame differently. Below are the Pacing Factors for each Servo Control Orifice Size by frame.

| Frame | Pacing Factors - Servo Control Orifice | | | | | | | |
|-----------|--|-------------|-------------|-------------|------------------------------|-------------|-------------|-------------|
| | 1.0 mm Servo Control Orifice | | | | 0.8 mm Servo Control Orifice | | | |
| | PC Response | PC Recovery | LS Response | LS Recovery | PC Response | PC Recovery | LS Response | LS Recovery |
| E-Frame* | 1 (No Effect) | 2.3 | 2.0 | 2.0 | 1 (No Effect) | 3.2 | 2.6 | 2.6 |
| F-Frame* | | 2.3 | 2.0 | 2.0 | | 3.2 | 2.6 | 2.6 |
| J-Frame* | | 2.3 | 2.0 | 2.0 | | 3.2 | 2.6 | 2.6 |
| K2-Frame | | 2.3 | 2.0 | 2.0 | | 3.2 | 2.6 | 2.6 |
| K-Frame** | | 2.3 | 2.3 | 2.3 | | 3.7 | 3.1 | 3.1 |
| L-Frame** | | 2.3 | 2.3 | 2.3 | | 3.7 | 3.1 | 3.1 |

* PC Response from 160 bar to 210 bar, PC Recovery from 210 bar to 160 bar at 1800 rpm; LS Response from 230 bar to 30 bar, LS Recovery from 30 bar to 230 bar at 1800 rpm.

** ** PC Response from 160 bar to 210 bar, PC Recovery from 210 bar to 160 bar at 1800 rpm; LS Response from 160 bar to 20 bar, LS Recovery from 20 bar to 160 bar at 1800 rpm.


Hydraulic Controls

Pressure compensated controls

Operation


The PC control maintains constant system pressure in the hydraulic circuit by varying the output flow of the pump. Used with a closed center control valve, the pump remains in high pressure standby mode at the PC setting with zero flow until the function is actuated. This condition is often called a **dead head** condition.

Typical operating curve

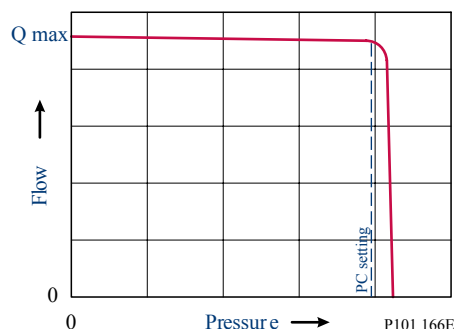

General Information

Simple closed-center circuit

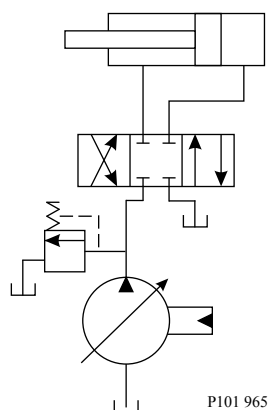

Once the closed center valve is opened, the PC control senses the immediate drop in system pressure and increases pump flow by increasing the swashplate angle. The pump continues to increase flow until system pressure reaches the PC setting. If system pressure exceeds the PC setting, the PC control reduces the swashplate angle to maintain system pressure by reducing flow. The PC control continues to monitor system pressure and changes swashplate angle to match the output flow with the work function pressure requirements.

If the demand for flow exceeds the capacity of the pump, the PC control directs the pump to maximum displacement. In this condition, actual system pressure depends on the actuator load.

Each section includes control schematic diagrams, setting ranges, and response / recovery times for each control available. *Response* is the time (in milliseconds) for the pump to reach zero displacement when commanded by the control. *Recovery* is the time (in milliseconds) for the pump to reach full displacement when commanded by the control. Actual times can vary depending on application conditions.

⚠ Warning

A relief valve is required to be installed in the pump outlet for additional system protection. Failure to install a relief valve may lead to system damage and/or injury.

Pressure compensated system characteristics

- Constant pressure and variable flow
- High pressure standby mode when flow is not needed
- System flow adjusts to meet system requirements
- Single pump can provide flow to multiple work functions
- Quick response to system flow and pressure requirements

Typical applications for pressure compensated systems


- Constant force cylinders (bailers, compactors, refuse trucks)
- On/off fan drives
- Drill rigs
- Sweepers
- Trenchers

Remote pressure compensated controls


The remote PC control is a two-stage control that allows multiple PC settings. Remote PC controls are commonly used in applications requiring low and high pressure PC operation.

General Information

Typical operating curve

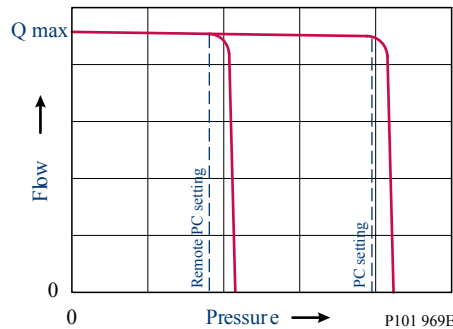

Closed center circuit with remote PC

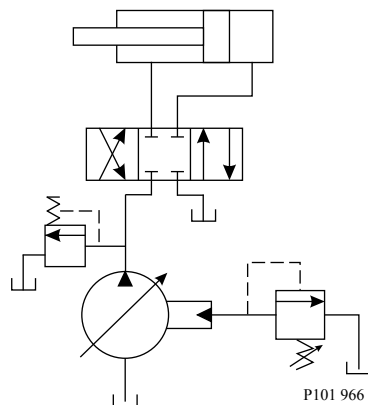

The remote PC control uses a pilot line connected to an external hydraulic valve. The external valve changes pressure in the pilot line, causing the PC control to operate at a lower pressure. When the pilot line is vented to reservoir, the pump maintains pressure at the load sense setting. When pilot flow is blocked, the pump maintains pressure at the PC setting. An on-off solenoid valve can be used in the pilot line to create a low-pressure standby mode. A proportional solenoid valve, coupled with a microprocessor control, can produce an infinite range of operating pressures between the low pressure standby setting and the PC setting.

⚠ Warning

A relief valve is required to be installed in the pump outlet for additional system protection. Failure to install a relief valve may lead to system damage and/or injury.

Each section includes control schematic diagrams, setting ranges, and response / recovery times for each control available. *Response* is the time (in milliseconds) for the pump to reach zero displacement when commanded by the control. *Recovery* is the time (in milliseconds) for the pump to reach full displacement when commanded by the control. Actual times can vary depending on application conditions.

Size the external valve and plumbing for a pilot flow of 3.8 l/min [1 US gal/min].

Remote pressure compensated system characteristics

- Constant pressure and variable flow
- High or low pressure standby mode when flow is not needed
- System flow adjusts to meet system requirements
- Single pump can provide flow to multiple work functions
- Quick response to system flow and pressure requirements

General Information

Typical applications for remote pressure compensated systems


- Modulating fan drives
- Anti-stall control with engine speed feedback
- Front wheel assist
- Road rollers
- Combine harvesters
- Wood chippers

Load sensing controls


Operation

The LS control matches system requirements for both pressure and flow in the circuit regardless of the working pressure. Used with a closed center control valve, the pump remains in low-pressure standby mode with zero flow until the valve is opened. The LS setting determines standby pressure.

Typical operating curve

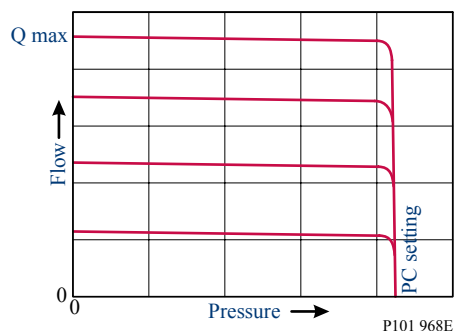

Load sensing circuit

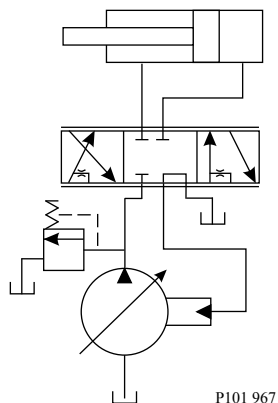

Most load sensing systems use parallel, closed center, control valves with special porting that allows the highest work function pressure (LS signal) to feed back to the LS control. Margin pressure is the difference between system pressure and the LS signal pressure. The LS control monitors margin pressure to read system demand. A drop in margin pressure means the system needs more flow. A rise in margin pressure tells the LS control to decrease flow.

LS control with bleed orifice

The load sense signal line requires a bleed orifice to prevent high-pressure lockup of the pump control. Most load-sensing control valves include this orifice. An optional internal bleed orifice is available, for use with control valves that do not internally bleed the LS signal to tank.

General Information

Integral PC function

The LS control also performs as a PC control, decreasing pump flow when system pressure reaches the PC setting. The pressure compensating function has priority over the load sensing function.

⚠ Warning

A relief valve is required to be installed in the pump outlet for additional system protection. Failure to install a relief valve may lead to system damage and/or injury.

Load sensing system characteristics


- Variable pressure and flow
- Low pressure standby mode when flow is not needed
- System flow adjusted to meet system requirements
- Lower torque requirements during engine start-up
- Single pump can supply flow and regulate pressure for multiple circuits
- Quick response to system flow and pressure requirements

Electric Controls

Electric Proportional Controls (EPC)

PLUS+1° Compliance


All Series 45 Electric controls have met and passed the Danfoss PLUS+1° compliance standard testing, and as such, this Series 45 control is PLUS+1° compliant. PLUS+1° compliance blocks are available on the Danfoss website, within the PLUS+1° Guide section.

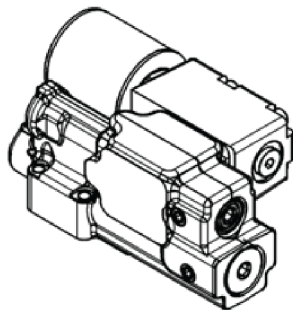

Electric Proportional Control Principle

The Electric Proportional Control consists of a proportional solenoid integrated into a Remote Pressure Compensated control. This control allows the pump to be operated at any pressure limit between the Load Sense and Pressure Compensation settings by varying the current sent to the solenoid.

General Information

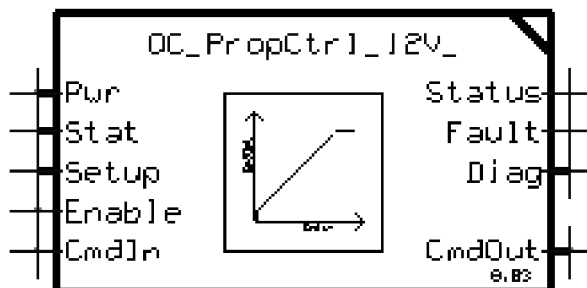

[Reference individual frame sections for the margin \(LS\) setting vs low pressure standby relationship.](#)

Electric proportional controls have a unique relationship between margin (LS) setting and low pressure standby. This relationship is available in the electric proportional controls section for each frame.

[For fan-drive systems, and systems with motors, use a minimum 15bar LS setting to enhance system stability. As the LS setting is reduced, the risk for system instability may be increased. A 20bar LS setting is recommended as a starting point for all new applications.](#)

Electric Proportional Control Response/Recovery

S45 Electric Proportional Controls require the use of a servo control orifice, and are available with two possible servo control orifice options. The servo control orifice is used to enhance system stability, as well as dampen the pump reactivity. A smaller orifice diameter will add dampening to the pump reactivity, while a larger orifice will allow quicker pump reaction. Fan-Drive applications, as well as systems with the pump supplying motors, are recommended to use the 0.8mm diameter orifice to enhance system stability.

| Module "G" Options for Electric Proportional Controls | | |
|---|---------------------|---------------------|
| Frame | "E" - 0.8mm Orifice | "F" - 1.0mm Orifice |
| All Frames | • | • |


Specific Electric Proportional Control Response/Recovery times are shown for the available servo control orifice options in the control section within each specific frame section. These times represent the response from 100bar to 200bar, and recovery from 200bar to 100bar. As the upper pressure approaches the PC setting, the PC function will begin to assist in clipping pressure overshoots during the pump's response, and will decrease the response times of the pump to equal those of the PC response.

Electric Proportional Control Pressure vs. Flow Characteristic

The Electric Proportional Controls continuous duty operating temperature range is shown below; this guideline should be followed as well as the maximum current limitations. Note that rated voltage refers to either a 12V or 24V coil. Under high temperature conditions, current required to operate the solenoid increases.

General Information

Continuous Duty Operating Temperature

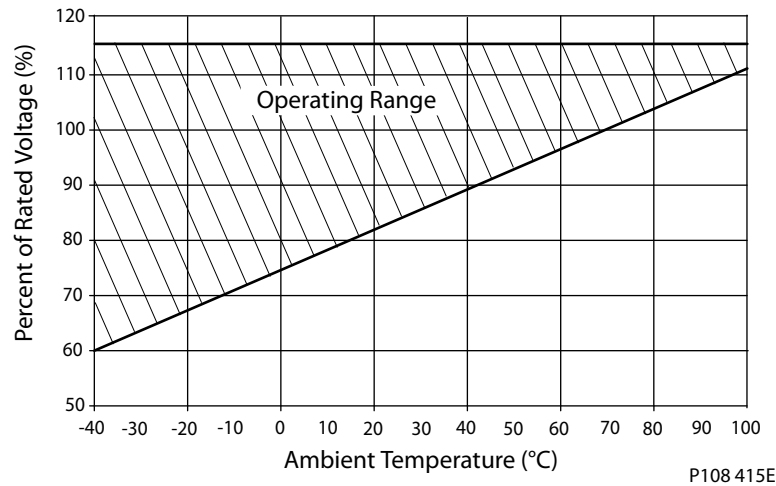


Electric Proportional Control Characteristic – Normally Closed

When an electric current is sent to the Normally Closed configuration control, the pump pressure decreases proportional to an increase in current. When the load in the system changes, the pump will adjust its displacement to maintain the pressure demanded by the controlling current. This control is especially useful for fan-drives, due to the direct relationship between fan-speed and pump pressure.

Due to the nature of Electric Proportional Controls, the relationship between current and pump pressure is unique for each individual PC/LS pressure setting combination. The relationship between different PC settings and different LS settings on the Pressure vs. Current Characteristic curve are shown below. The hydraulic schematic for the Normally Closed Electric Proportional control is shown below as well.

Operating Pressure vs. Input Current (N.C. EPC)

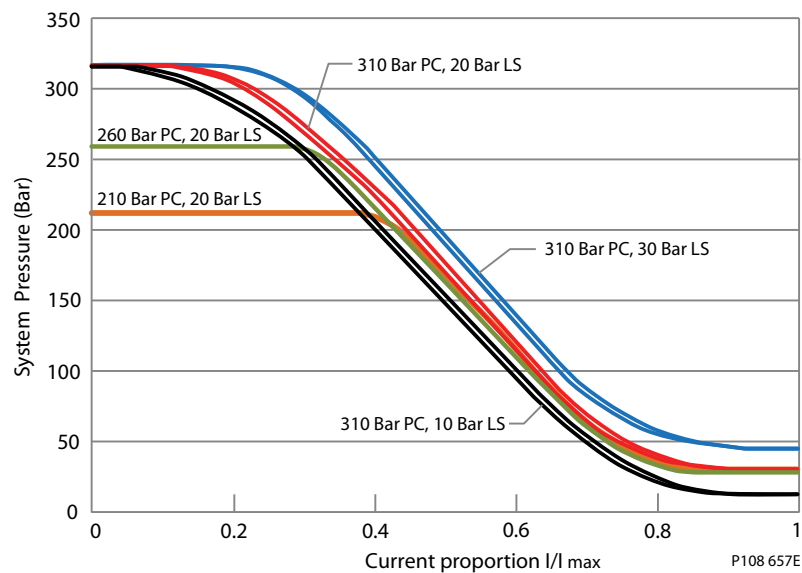

Solenoid Data – Normally Closed

| Voltage | 12V | 24V |
|-----------------|------------|------------|
| Maximum Current | 1800 mA | 920 mA |
| Inrush Current | 1700 mA | 800 mA |

General Information

Solenoid Data – Normally Closed (continued)

| Voltage | 12V | 24V |
|---|--|--------|
| Coil Resistance @ 20°C [70°F] | 7.1 Ω | 28.5 Ω |
| PWM Range | 200-300 Hz | |
| PWM Frequency (preferred) | 250 Hz | |
| IP Rating (IEC 60529 DIN 40050-9) | IP67 | IP67 |
| IP Rating (IEC 60529 DIN 40050-9) with mating connector | IP69K | IP69K |
| Operating Temperature | Consistent with Pump Limits: -40°C (-40°F) to 104°C (220°F) | |

The available Normally Closed Electric Proportional Controls for the Series 45 are shown below. The allowable Pressure Compensator (PC) and Load Sense (LS) pressure settings are provided for each frame in their respective sections.

| Electric Proportional Controls Options – Normally Closed | | Frame | | | | | |
|--|--|-------|---|----|---|---|---|
| Code | Description | L | K | K2 | J | F | E |
| AH | Electric Proportional Pressure Control w/Pressure Comp. (NC, 12VDC) Left | | | • | • | • | • |
| AL | Electric Proportional Pressure Control w/Pressure Comp. (NC, 24VDC) Left | | | • | • | • | • |
| AV | Electric Proportional Pressure Control w/Pressure Comp. (NC, 12VDC) Right | | | | • | • | • |
| AK | Electric Proportional Pressure Control w/Pressure Comp. (NC, 24VDC) Right | | | | • | • | • |
| BH | Electric Proportional Pressure Control w/Pressure Comp. (NC, 12VDC) [>280 bar] Left | | | | • | • | • |
| BL | Electric Proportional Pressure Control w/Pressure Comp. (NC, 24VDC) [>280 bar] Left | | | | • | • | • |
| BM | Electric Proportional Pressure Control w/Pressure Comp. (NC, 12VDC) [>280 bar] Right | | | | • | • | • |
| BK | Electric Proportional Pressure Control w/Pressure Comp. (NC, 24VDC) [>280 bar] Right | | | | • | • | • |
| EM | Electric Proportional Pressure Control w/Pressure Comp. (NC, 12VDC) | • | • | | | | |
| EN | Electric Proportional Pressure Control w/Pressure Comp. (NC, 24VDC) | • | • | | | | |

Notes:

1. Left = E-Frame: CW Only, F-Frame: CW Only, J-frame: CW Axial, CCW Radial
2. Right = E-Frame: CCW Only, F-Frame: CCW Only, J-frame: CCW Axial, CW Radial
3. K/L Frame Controls are not rotation dependent
4. K2 Frame electric controls are limited only for Left orientation and up to 260 Bar

Electric Proportional Control Characteristic – Normally Open


When an electric current is sent to the normally open configuration control, the pump pressure increases proportional to an increase in current. When the load in the system changes, the pump will adjust its displacement to maintain the pressure demanded by the controlling current. This control is especially useful for fan-drives, due to the direct relationship between fan-speed and pump pressure.

Due to the nature of Electric Proportional Controls, the relationship between current and pump pressure is unique for each individual PC/LS pressure setting combination. The relationship between different PC

General Information

settings and different LS settings on the Pressure vs. Current Characteristic curve are shown below. The hydraulic schematic for the Normally Open Electric Proportional control is shown below as well.

Operating Pressure vs. Input Current (N.O. EPC)

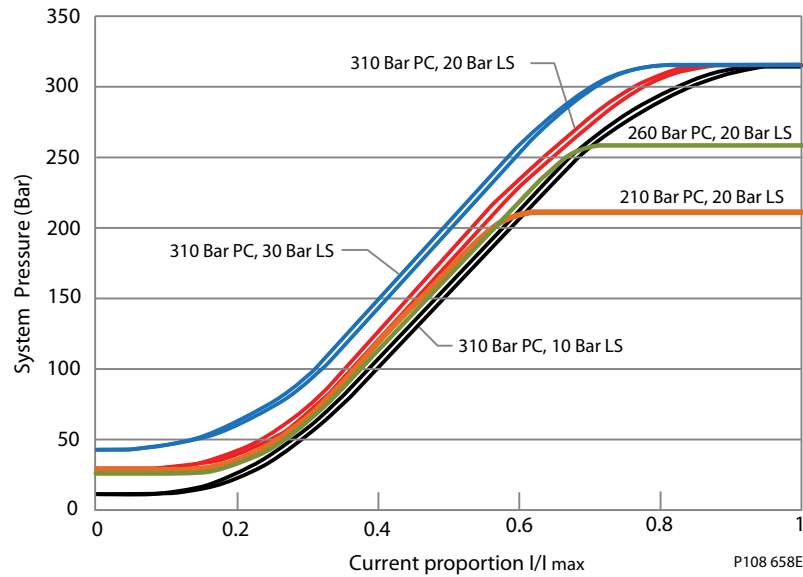

Solenoid Data – Normally Open

| Voltage | 12V | 24V |
|---|--|------------|
| Maximum Current | 1500 mA | 665 mA |
| Inrush Current | 1700 mA | 800 mA |
| Coil Resistance @ 20°C [70°F] | 7.1 Ω | 28.5 Ω |
| PWM Range | 200-300 Hz | |
| PWM Frequency (preferred) | 250 Hz | |
| IP Rating (IEC 60529 DIN 40050-9) | IP67 | IP67 |
| IP Rating (IEC 60529 DIN 40050-9) with mating connector | IP69K | IP69K |
| Operating Temperature | Consistent with Pump Limits: -40°C (-40°F) to 104°C (220°F) | |

The available Normally Open Electric Proportional Controls for the Series 45 are shown below. The allowable Pressure Compensator (PC) and Load Sense (LS) pressure settings are provided for each frame in their respective sections. Note that for Electric Proportional Controls, the Load Sense setting describes the Low Pressure Standby value, not margin.

| Electric Proportional Controls Options – Normally Open | | Frame | | | | | |
|---|---|--------------|---|----|---|---|---|
| Code | Description | L | K | K2 | J | F | E |
| AX | Electric Proportional Pressure Control w/Pressure Comp. (NO, 12VDC) Left | | | • | • | • | • |
| CL | Electric Proportional Pressure Control w/Pressure Comp. (NO, 24VDC) Left | | | • | • | • | • |
| AW | Electric Proportional Pressure Control w/Pressure Comp. (NO, 12VDC) Right | | | | • | • | • |
| CK | Electric Proportional Pressure Control w/Pressure Comp. (NO, 24VDC) Right | | | | • | • | • |
| BX | Electric Proportional Pressure Control w/Pressure Comp. (NO, 12VDC) [>280 bar] Left | | | | • | • | • |

General Information

| Electric Proportional Controls Options – Normally Open | | Frame | | | | | |
|--|--|-------|---|--|---|---|---|
| DL | Electric Proportional Pressure Control w/Pressure Comp. (NO, 24VDC) [>280 bar] Left | | | | • | • | • |
| BW | Electric Proportional Pressure Control w/Pressure Comp. (NO, 12VDC) [>280 bar] Right | | | | • | • | • |
| DK | Electric Proportional Pressure Control w/Pressure Comp. (NO, 24VDC) [>280 bar] Right | | | | • | • | • |
| EK | Electric Proportional Pressure Control w/Pressure Comp. (NO, 12VDC) | • | • | | | | |
| EL | Electric Proportional Pressure Control w/Pressure Comp. (NO, 24VDC) | • | • | | | | |


Notes:

1. Left = E-Frame: CW Only, F-Frame: CW Only, J-frame: CW Axial, CCW Radial
2. Right = E-Frame: CCW Only, F-Frame: CCW Only, J-frame: CCW Axial, CW Radial
3. K/L Frame Controls are not rotation dependent
4. K2 Frame electric controls are limited only for Left orientation and up to 260 Bar

Electric On-Off Controls

PLUS+1 Compliance


All Series 45 Electric controls have met and passed the Danfoss PLUS+1 compliance standard testing, and as such, this Series 45 control is PLUS+1 compliant. PLUS+1 compliance blocks are available on the Danfoss website, within the PLUS+1 Guide section.

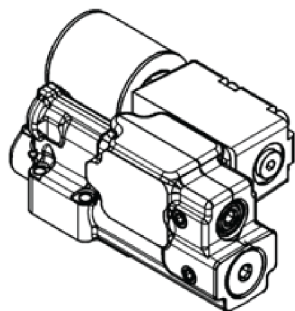

Electric On-Off Control Principle

The Electric On/Off Control consists of an On/Off solenoid integrated into a Remote Pressure Compensated control. This control allows the pump to be operated at either the Load Sense pressure setting when “On”, or the Pressure Compensation pressure setting when “Off”.

General Information

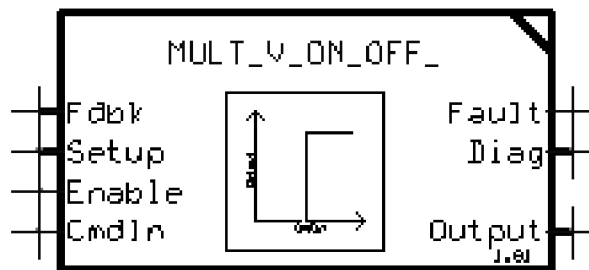

For fan-drive systems, and systems with motors, use a minimum 15bar LS setting to enhance system stability. As the LS setting is reduced, the risk for system instability may be increased. A 20bar LS setting is recommended as a starting point for all new applications.

Electric On-Off Control Response/Recovery

S45 Electric On/Off Controls are available with two servo control orifice options, as well as without an orifice. The servo control orifice is used to enhance system stability, as well as dampen the pump reactivity. A smaller orifice diameter will add dampening to the pump reactivity, while a larger orifice will allow quicker pump reaction.

| Module "G" Options for Electric On/Off Controls | | | |
|---|---------------------|---------------------|------------------|
| Frame | "E" - 0.8mm Orifice | "F" - 1.0mm Orifice | "N" - No Orifice |
| All Frames | • | • | • |


Specific Electric On/Off Control Response/Recovery times are shown for the available servo control orifice options in the control section within each specific frame section. These times represent the response from 75% of rated continuous pressure to 100% of rated continuous pressure, and recovery from 100% of rated continuous pressure to 75% of rated continuous pressure for N.C. configuration per SAE J745 (vice-versa for N.O). As the system pressure approaches the PC setting, the PC function will begin to assist in clipping pressure overshoots during the pump's response, and will decrease the response times of the pump to equal those of the PC response.

Electric On-Off Control Performance vs. Ambient Temperature Characteristic

The Electric On/Off Controls continuous duty operating temperature range is shown below; this guideline should be followed as well as the maximum current limitations. Note that rated voltage refers to either a 12V or 24V coil. Under high temperature conditions the PWM duty cycle to operate the solenoid increases.

General Information

Continuous Duty Operating Temperature

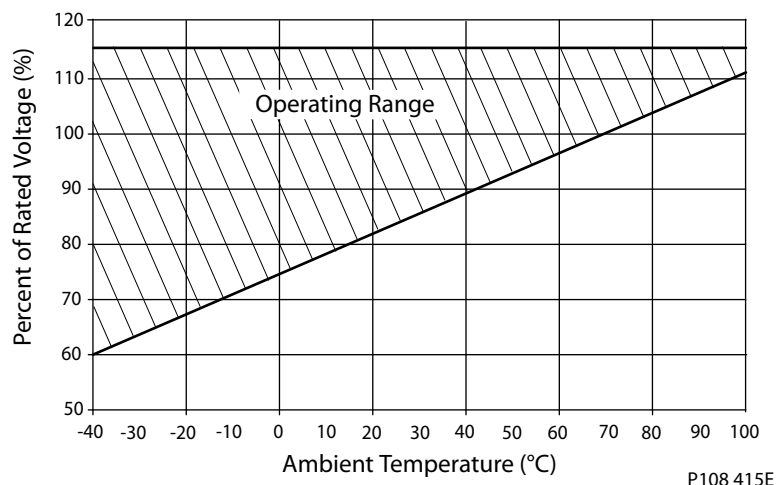

P108 415E

Electric On-Off Control Characteristic – Normally Closed

The normally closed configuration On/Off control directs the pump to its Pressure Compensation pressure setting when no current is applied. When the required electric current is sent to the normally closed configuration control the pump pressure decreases to the Low-Pressure Standby setting. This control does not have Load Sense functionality, but rather acts as a Pressure Compensation control when not energized, or is directed to its low-pressure standby when energized. This control is especially useful for machine startups, as the pump can be directed to its Low-Pressure Standby setting during startup to reduce the load on engine starters.

The available Normally Closed Electric On/Off Controls for the Series 45 are shown below. The allowable Pressure Compensator (PC) and Load Sense (LS) pressure settings are provided for each frame in their respective sections.

| Electric On/Off Controls Options – Normally Closed | | Frame | | | | | |
|--|---|-------|---|----|---|---|---|
| Code | Description | L | K | K2 | J | F | E |
| AR | Electric On/Off Pressure Control w/Pressure Comp. (NC,12VDC) Left | | | • | • | • | • |
| CR | Electric On/Off Pressure Control w/Pressure Comp. (NC,24VDC) Left | | | • | • | • | • |
| AG | Electric On/Off Pressure Control w/Pressure Comp. (NC,12VDC) Right | | | | • | • | • |
| AY | Electric On/Off Pressure Control w/Pressure Comp. (NC,24VDC) Right | | | | • | • | • |
| BR | Electric On/Off Pressure Control w/Pressure Comp. (NC,12VDC) [>280 bar] Left | | | | • | • | • |
| DR | Electric On/Off Pressure Control w/Pressure Comp. (NC,24VDC) [>280 bar] Left | | | | • | • | • |
| BE | Electric On/Off Pressure Control w/Pressure Comp. (NC,12VDC) [>280 bar] Right | | | | • | • | • |
| BG | Electric On/Off Pressure Control w/Pressure Comp. (NC,24VDC) [>280 bar] Right | | | | • | • | • |
| EB | Electric On/Off Pressure Control w/Pressure Comp. (NC,12VDC) | • | • | | | | |
| EE | Electric On/Off Pressure Control w/Pressure Comp. (NC,24VDC) | • | • | | | | |

Notes:

General Information

1. Left = E-Frame: CW Only, F-Frame: CW Only, J-frame: CW Axial, CCW Radial
2. Right = E-Frame: CCW Only, F-Frame: CCW Only, J-frame: CCW Axial, CW Radial
3. K/L Frame Controls are not rotation dependent
4. K2 Frame electric controls are limited only for Left orientation and up to 260 Bar

Electric On/Off Control Characteristic – Normally Open

The Normally Open configuration On/Off control directs the pump to its Low-Pressure Standby setting when no current is applied. When the required electric current (end current) is sent to the Normally Open configuration control, the pump pressure increases to the Pressure Compensation pressure setting. This control does not have Load Sense functionality, but rather acts as a Pressure Compensation control when energized, or is directed to its Low-Pressure Standby when de-energized. This control is especially useful for machine startups, as the pump can be directed to its Low Pressure Standby setting during startup to reduce the load on engine starters.

Solenoid Data – Normally Open

| Voltage | 12V | 24V |
|---|--|--------|
| Maximum Current | 1500 mA | 665 mA |
| Inrush Current | 1700 mA | 800 mA |
| Coil Resistance @ 20°C [70°F] | 7.1 Ω | 28.5 Ω |
| PWM Range | 200-300 Hz | |
| PWM Frequency (preferred) | 250 Hz | |
| IP Rating (IEC 60529 DIN 40050-9) | IP67 | IP67 |
| IP Rating (IEC 60529 DIN 40050-9) with mating connector | IP69K | IP69K |
| Operating Temperature | Consistent with Pump Limits: -40°C (-40°F) to 104°C (220°F) | |

The available Normally Open Electric On/Off Controls for the Series 45 Frame E are shown below, with the allowable Pressure Compensator (PC) pressure range provided for each control. All Electric On/Off Controls are available with the 10-40bar Load Sense (LS) setting range.

| Electric On/Off Controls Options – Normally Open | | Frame | | | | | |
|--|---|-------|---|----|---|---|---|
| Code | Description | L | K | K2 | J | F | E |
| AN | Electric On/Off Pressure Control w/Pressure Comp. (NO,12VDC) Left | | | • | • | • | • |
| CN | Electric On/Off Pressure Control w/Pressure Comp. (NO,24VDC) Left | | | • | • | • | • |
| AF | Electric On/Off Pressure Control w/Pressure Comp. (NO,12VDC) Right | | | | • | • | • |
| AT | Electric On/Off Pressure Control w/Pressure Comp. (NO,24VDC) Right | | | | • | • | • |
| BN | Electric On/Off Pressure Control w/Pressure Comp. (NO,12VDC) [>280 bar] Left | | | | • | • | • |
| DN | Electric On/Off Pressure Control w/Pressure Comp. (NO,24VDC) [>280 bar] Left | | | | • | • | • |
| BF | Electric On/Off Pressure Control w/Pressure Comp. (NO,12VDC) [>280 bar] Right | | | | • | • | • |
| DF | Electric On/Off Pressure Control w/Pressure Comp. (NO,24VDC) [>280 bar] Right | | | | • | • | • |
| EA | Electric On/Off Pressure Control w/Pressure Comp. (NO,12VDC) | • | • | | | | |
| EG | Electric On/Off Pressure Control w/Pressure Comp. (NO,24VDC) | • | • | | | | |

General Information

Notes:

1. Left = E-Frame: CW Only, F-Frame: CW Only, J-frame: CW Axial, CCW Radial
2. Right = E-Frame: CCW Only, F-Frame: CCW Only, J-frame: CCW Axial, CW Radial
3. K/L Frame Controls are not rotation dependent
4. K2 Frame electric controls are limited only for Left orientation and up to 260 Bar

Electric dump valve PC/LS controls


The electric dump valve pressure-compensated/load sense control allows the pump to operate as a PC/LS type control under normal operating conditions. The solenoid dump valve overrides the LS control, allowing the pump to operate in a Low-Pressure Standby mode. This function provides reduced horsepower and torque loss in certain situations. It may be particularly useful to reduce loads on a system during engine start.

When closed, the solenoid valve allows the control to act as a PC/LS control. When open, the solenoid valve allows flow from the incoming load sense pressure to dump to case. This reduces the pressure in the LS spring cavity, shifting the LS spool, and allows the pump to de-stroke to the Low-Pressure Standby condition. This control is for applications needing a PC/LS control with the ability to switch to Low-Pressure Standby electronically. The solenoid valve is available in a normally closed and open configuration.

[For high cycling or power management applications, ensure to limit margin pressures to 60 bar or less for optimal control component life.](#)

Refer to [LS System Over-Signaling](#) on page 50 for more details.

Electric Dump Control (frames E, F and J)

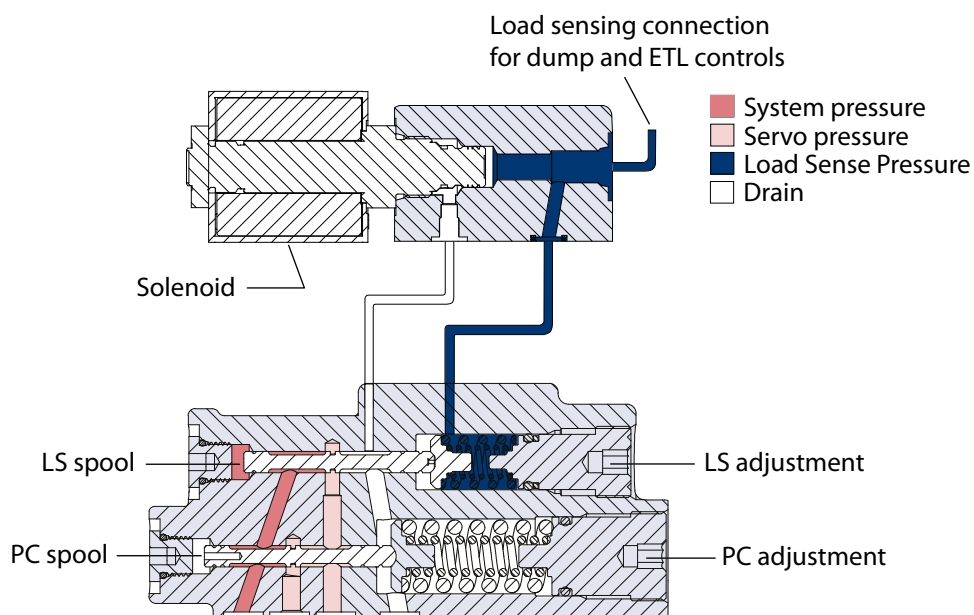


P108589

Electronic Torque Limiting Controls (ETL)

PLUS+1 Compliance

All controls for this product have met and passed the Danfoss PLUS+1[®] compliance standard testing, and as such, this product control is PLUS+1[®] Compliant. PLUS+1[®] compliance blocks (software) are available on the Danfoss website, |


General Information

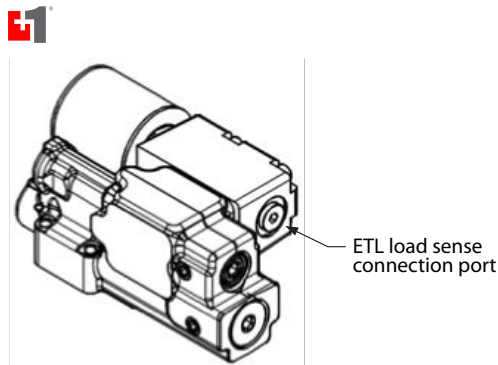

Electric Torque Limiting Control Principle

The Electronic Torque Limiting control consists of a normally closed proportional relief valve (PRV) integrated into a Pressure Compensated/Load Sensing control. This control operates as a PC/LS control, with the additional ability to limit load sense pressure using the integrated PRV by varying the current to the solenoid. When combined with an angle sensor, this control allows for a PC/LS control with electronic torque limiting.

J-frame pump with integrated ETL control

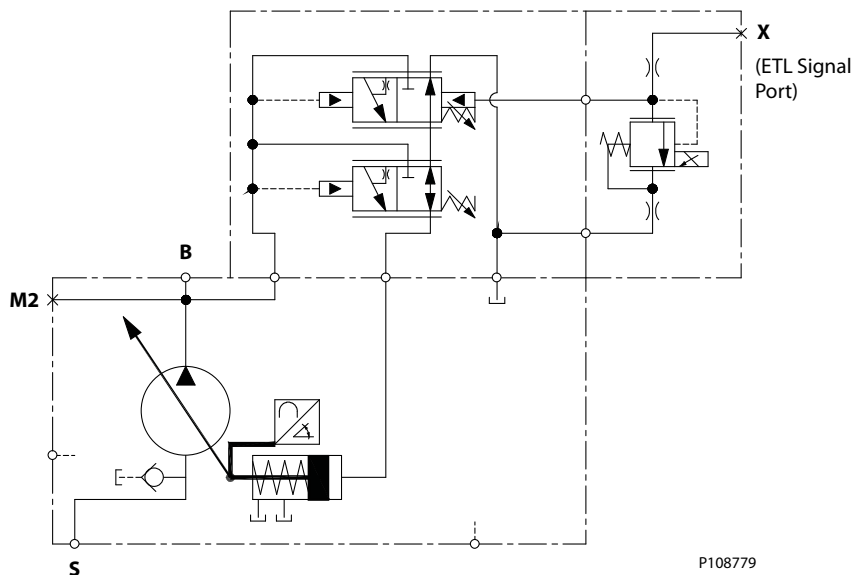


Pump torque consumption is a function of pump outlet pressure, pump displacement, and pump mechanical efficiency. When pump mechanical efficiency is considered constant, the pump torque can be limited when pump displacement is known and pump pressure is controlled. As pump displacement increases, the pump outlet pressure can be limited using the PRV to result in a constant torque limit. Pump outlet pressure is equal to the load sense pressure, which is limited with the PRV, plus the margin pressure setting of the pump.

$$Torque = \frac{Pump\ Outlet\ Pressure\ (bar) * Pump\ Displacement\ (\frac{cc}{rev})}{62.8 * Pump\ Mechanical\ Efficiency\ (\%)}$$


General Information

Electronic Torque Limiting Control Characteristic

The Electronic Torque Limiting control allows users to limit pump torque consumption electronically by combining a pressure limiting PRV and angle sensor. This torque limit can be changed with varying engine speeds (as shown in the Electronic Torque Limiting graph below), allowing the use of full engine torque at all engine speeds and increasing machine productivity. A microcontroller is required to store engine torque vs speed, receive the pump angle sensor signal, and then calculate and output the pump outlet pressure limit. The basic torque limiting control logic for a single engine speed is shown below. Danfoss offers a PLUS+1 subsystem application block for the Electronic Torque Limiting control option in combination with keyed MC012-112 microcontroller hardware. The part number for the keyed MC012-112 microcontroller is 11157484. Refer to graph [Operating Pressure vs. Input Current \(N.C. EPC\)](#) on page 20 for pressure vs. current information.

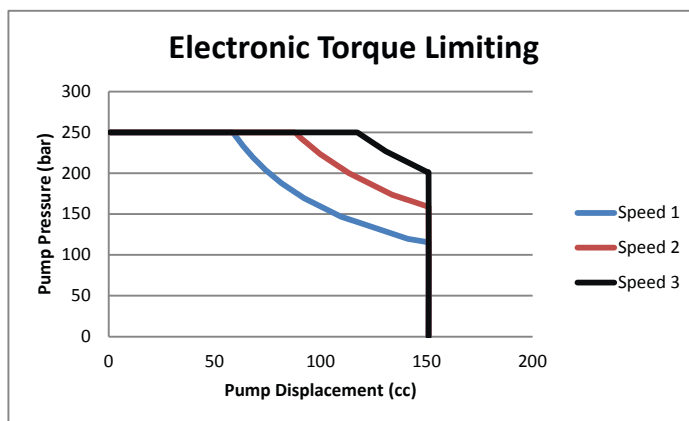

P108783

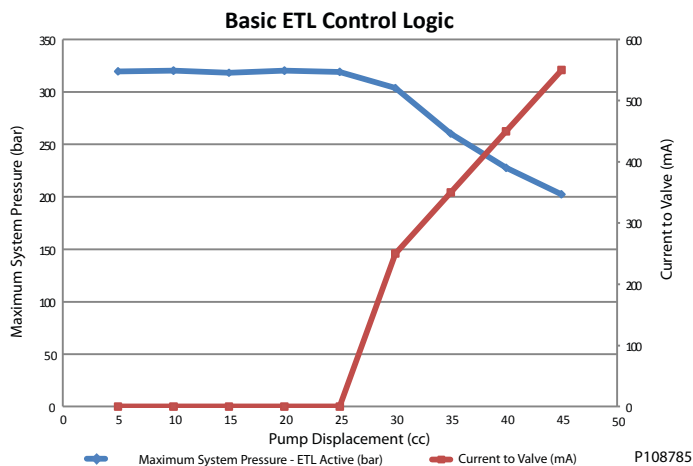

P108785


Fan Drive Control (FDC)

PLUS+1 Compliance

All Series 45 Electric controls have met and passed the Danfoss PLUS+1 compliance standard testing, and as such, this Series 45 control is PLUS+1 compliant. PLUS+1 compliance blocks (software) are available on the Danfoss website, within the PLUS+1 Guide section.



General Information

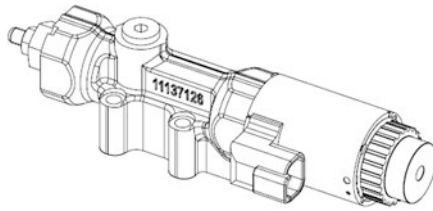

General Information

Fan Drive Control Principle

The Fan Drive Control is a unique electrically actuated pressure control solution that consists of a normally closed proportional solenoid and one dual diameter spool sliding in the control housing. System pressure acts on an area between the two spool diameters of the spool lands. This hydraulic force is balanced with forces of springs and the solenoid when the spool is in the metering position. When no current is sent to the solenoid it operates the pump at or below the PC setting which is adjusted mechanically with the adjustor screw and lock nut. Increasing the control current proportionally reduces the pump's outlet pressure until a minimum standby pressure is reached.

Control Block 12V and 24V



The minimum system pressure is given by swashplate moments of the pump and by servo system leakages which produce a pressure drop across the control. In addition, fan motor type and fan inertia impact minimum system pressure.

The Normally Closed Fan Drive Control coupled with a microprocessor allows the pump to operate at an infinite range of operating pressures between a minimum system pressure and PC setting.

⚠ Warning

A relief valve is required to be installed in the pump outlet for additional system protection. Failure to install a relief valve may lead to system damage and/or injury.

⚠ Warning

The Fan Drive Control is intended for fan drive systems only! Use in other systems could result in system component damage or unintended machine movement. The Fan Drive Control is not intended to serve at the primary system pressure relief. Loss of the input signal to this control will cause the pump to produce maximum flow.

Fan Drive Control System Characteristics


- Constant pressure and variable flow
- High or low system pressure mode based on fan cooling demand
- System flow adjusts to meet system requirements

General Information

Unintended Applications for Fan Drive Control Systems

- Applications with frequent PC events (system pressure overshoots)
- Adjustable Load Sensing systems


Fan Drive Control Cross Section

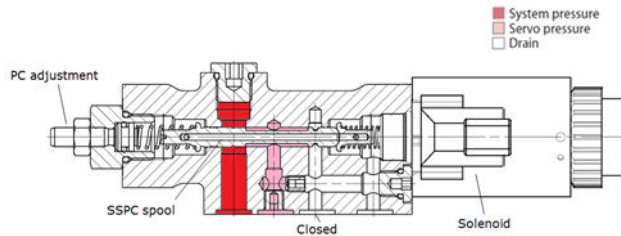

Fan Drive Control characteristic - Normally Closed


When an electric current is sent to the Normally Closed Fan Drive Control, pump outlet pressure decreases proportionally to the increase in current. When the load in the system changes, the pump will adjust its displacement to maintain the pressure demanded by the controlling current. This predictable control is especially useful for fan-drive systems, due to the direct relationship between fan-speed and pump pressure. Due to the nature of the Fan Drive Control, the relationship between current and pump pressure is unique for each individual PC pressure setting combination. The relationship between pump outlet pressure and control input current (for a 24V coil) is shown for various PC settings below. The hydraulic schematic for the Normally Closed Fan Drive Control is shown below as well.

Pump Outlet Pressure vs. control input current 24V Normally closed FDC (at 100Hz PWM)

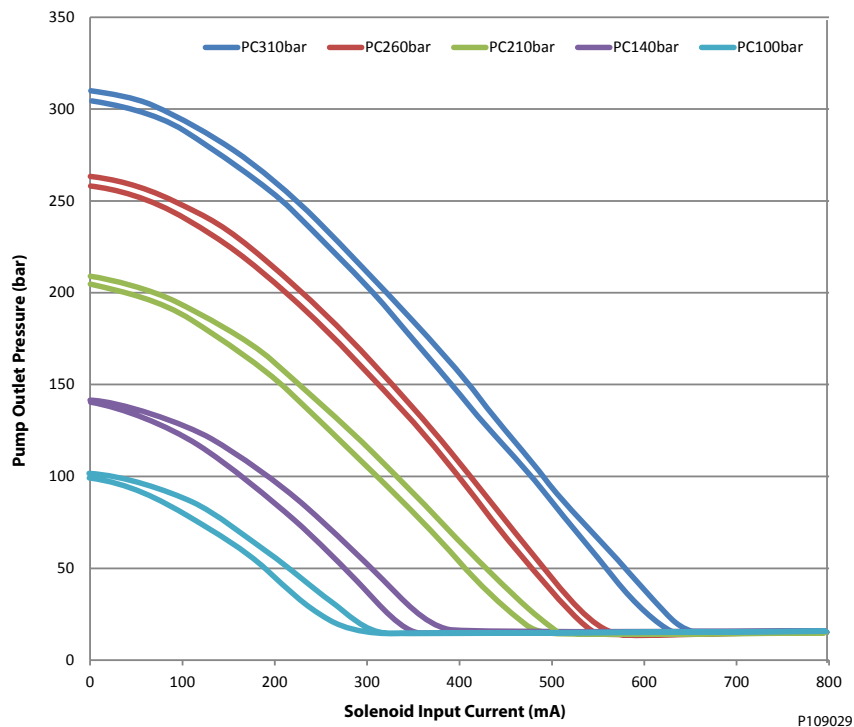

General Information


Pump Outlet Pressure vs. control input current 12V Normally closed FDC (at 100Hz PWM)

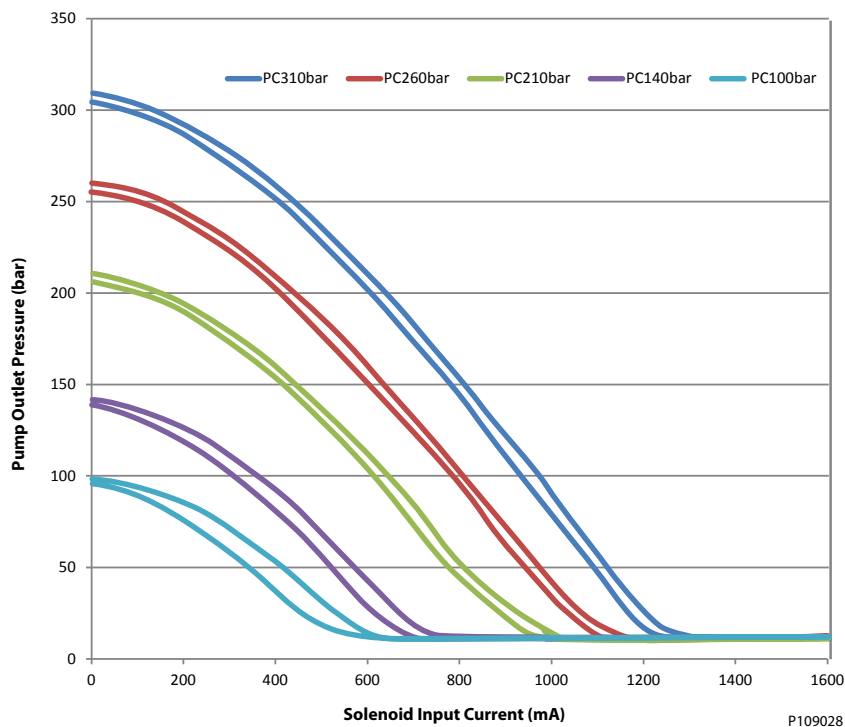

Attaining remarkably low system pressures is possible with the Fan Drive Control. The minimum system pressure is greatly dependent on individual system parameters such as fan motor type and fan size. This feature is highly desirable in low cooling demand conditions to keep fan speed as slow as possible.

Virtually eliminated control deadband increases controllability and reduces power loss. Control current resolution is greatly improved.

S45 pump with integrated FDC control Schematic

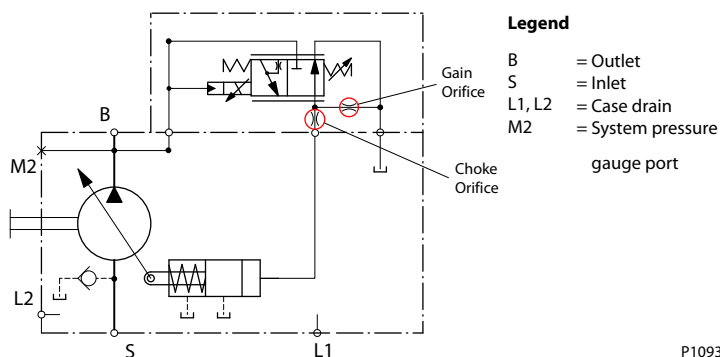

Solenoid data – Normally closed

Solenoid Data – Normally Closed

| | 12V | 24V |
|---------------------------------|-----------------|-----|
| Connector on solenoid | Deutsch DT04-2P | |
| Mating Connector (not included) | Deutsch DT06-2S | |

General Information

Solenoid Data – Normally Closed (continued)

| | 12V | 24V |
|---------------------------------|---|------------|
| Identification by color of nut | Black | Blue |
| Nominal current | 1650 mA | 840 mA |
| Maximum Control Current | 1800 mA | 920 mA |
| Environmental rating | IP67 without mating connector, IP69K with mating connector | |
| Maximum output driver current | 2.0 Amps | |
| PLUS+1 dither frequency | Not recommended | |
| Useable PWM Frequency Range | 50-200 Hz | |
| Recommended PWM Frequency | 200 Hz | |
| Nominal Resistance at 20°C | 3.66 Ω | 14.2 Ω |
| Inductivity (pin at stroke end) | 33 mH | 140 mH |
| Minimum voltage | 9.5 Vdc | 19.0 Vdc |
| Maximum power | 17.9 Watts | 18.1 Watts |

The Fan Drive Control is designed as a current driven control. It requires a PWM- input signal.

General Information

Fan Drive Control configuration

The available Normally Closed Fan Drive Controls for Series 45 are shown below. The allowable Pressure Compensator (PC) pressure settings are provided for each frame.

C module—Control

| Fan Drive Control Options | | Frame | | | | | |
|---------------------------|---|-------|---|----|---|---|---|
| Code | Description | L | K | K2 | J | F | E |
| SA | Fan Drive Control (12Vdc), 100-210 Bar, Left | | | • | • | • | |
| SB | Fan Drive Control (24Vdc), 100-210 Bar, Left | | | • | • | • | |
| SC | Fan Drive Control (12Vdc), 220-310 Bar, Left | | | • | • | • | |
| SD | Fan Drive Control (24Vdc), 220-310 Bar, Left | | | • | • | • | |
| SE | Fan Drive Control (12Vdc), 100-210 Bar, Right | | | | • | • | |
| SF | Fan Drive Control (24Vdc), 100-210 Bar, Right | | | | • | • | |
| SG | Fan Drive Control (12Vdc), 220-310 Bar, Right | | | | • | • | |
| SH | Fan Drive Control (24Vdc), 220-310 Bar, Right | | | | • | • | |


G module options—Choke Orifice

| Fan Drive Control options | Choke Orifice size |
|---------------------------|--------------------|
| G | 0.8 mm (0.031 in) |
| F | 1.0 mm (0.039 in) |

H module options—Gain Orifice

| Fan Drive Control options | Gain Orifice Size |
|---------------------------|-------------------|
| E | 1.2 mm (0.047 in) |

NC Fan Drive Control 3D Views

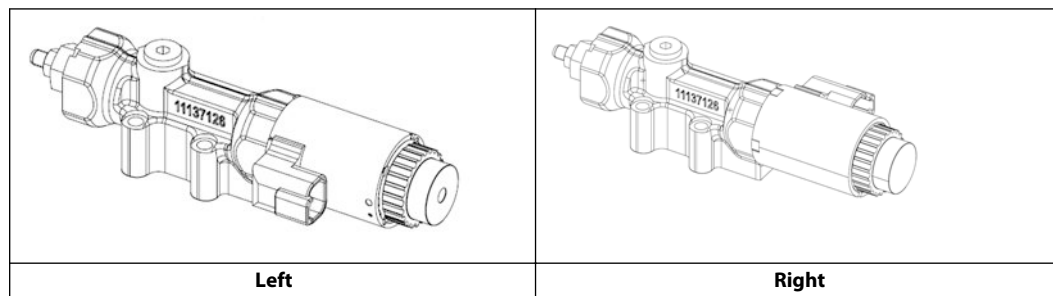


Angle Sensor

PLUS+1 Compliance

The Electric Angle Sensor has met and passed the Danfoss PLUS+1 compliance standard testing, and as such, this Angle Sensor is PLUS+1 compliant. PLUS+1 compliance blocks are available on the Danfoss website, within the PLUS+1 Guide section.





General Information



Angle Sensor Principle

The Series 45 Angle Sensor option allows users to measure the angle of pump displacement. The angle sensor is an electronic sensor mounted to the housing of the pump, which reads the pump stroke angle based on the swashplate position. Interfacing with the angle sensor is achieved through a 4-pin Deutsch DTM04-4P receptacle attached to a flexible connection cable (for a mating connector, use Deutsch® plug DTM06-4S). The sensor is mounted to the pump within an aluminum housing to prevent magnetic interference.

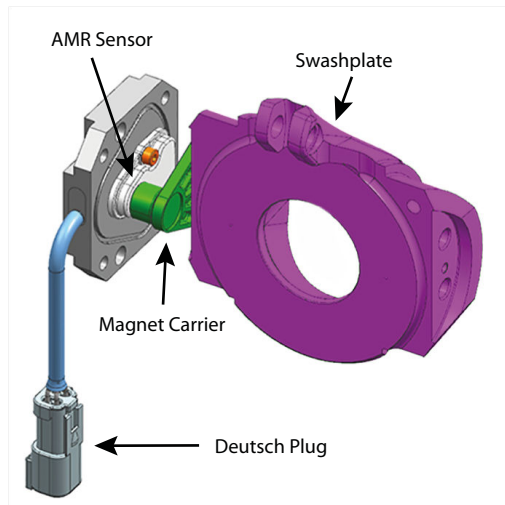

P108788

Angle Sensor Characteristics


The angle sensor package incorporates two sensor signals (primary & secondary), within a single sensor housing. This allows for improved accuracy and troubleshooting. For the 'Angle Sensor – Right' order code in the K module, the sensor is positioned according to the following conventions:

| Code | Description | Frame | | | | |
|-----------------------------|--|-------|---|---|---|---|
| | | L | K | J | F | E |
| K Module - Housing | | | | | | |
| A1R | SAE-C Flange 4-bolt, SAE O-ring boss ports, Single seal, Angle Sensor | | | | • | |
| A2R | SAE-C Flange 4-bolt, SAE O-ring boss ports, Single seal, Angle Sensor | | | • | | • |
| AFR | SAE-C Flange 2-bolt @45°, SAE O-ring boss ports, Single Seal, Angle Sensor | | | • | | |
| M Module – Special Hardware | | | | | | |
| ANS | Angle Sensor Hardware | | | • | • | • |


General Information

J & F-Frame (45-90cc) Angle Sensor Identification Convention:

When looking at the input shaft with the control on the 'top' side, the angle sensor will be viewed on the right hand side. This convention is true for both Clockwise and Counter-clockwise rotation J & F-Frames.

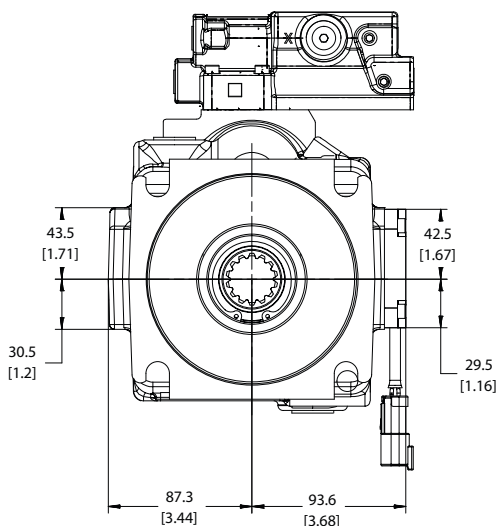


J Frame Angle Sensor Position

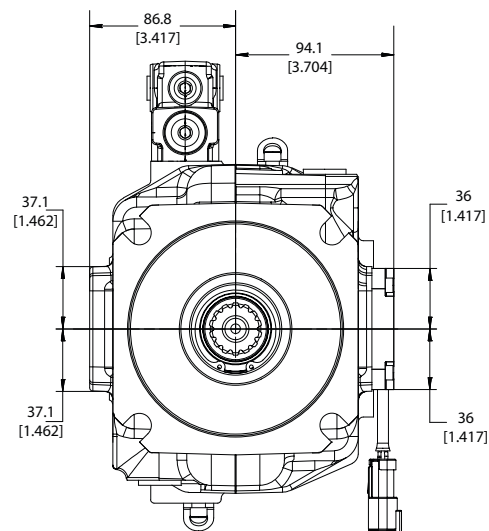

F Frame Angle Sensor Position

P108816


This sensor location yields a unique voltage versus swashplate angle characteristic curve which is the same for both Clockwise and Counter-clockwise rotation J & F-frames. Although each pair of curves will be unique for individual pumps, a general example of what to expect is provided below for J & F units with the 'Right' angle sensor position.

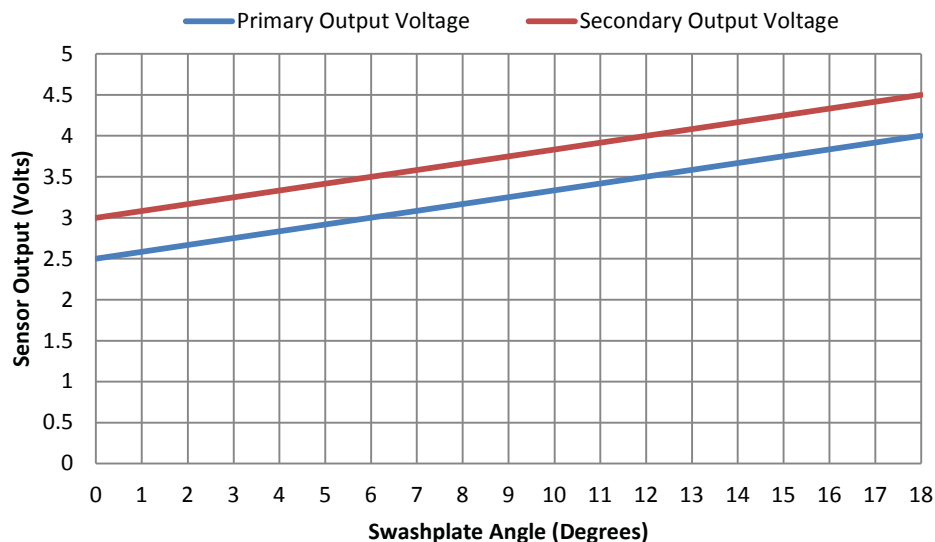

E-Frame (100-147cc) Angle Sensor Identification Convention:

The location convention for the E-Frame angle sensor is different from that of the J & F-Frame due to a difference in design of the endcap and servo systems. When looking at the input shaft, the angle sensor will be positioned on the same side as the outlet port of the endcap. The outlet port of the endcap is always the smaller of the inlet and outlet ports, indicated below. This is the 'right side' order code location, even though it appears on the left hand side from a frontal view.

General Information

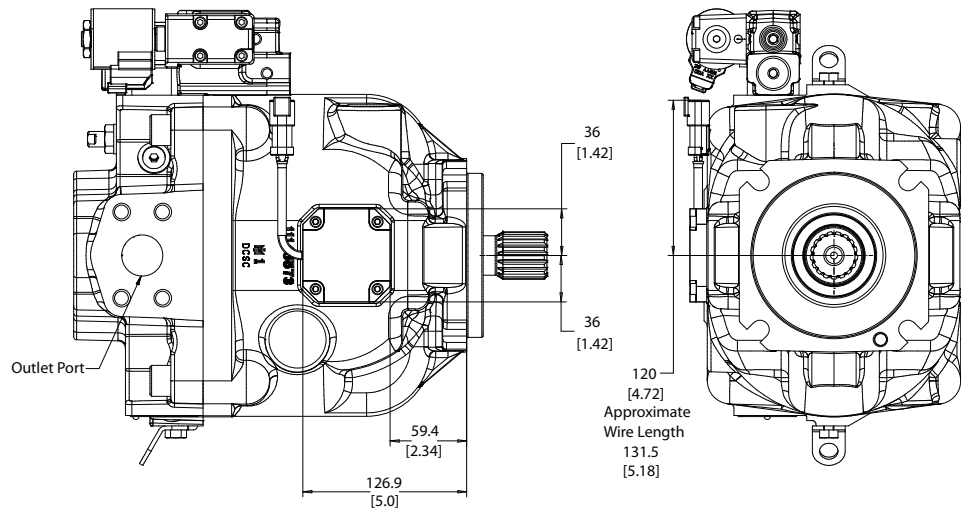



E Frame Angle Sensor Position

P108821

Clockwise rotation E-frames appear with the control on the top side in this view. Counter-clockwise rotation E-Frames appear with the control on the bottom side in this view.

This sensor location yields a unique voltage versus swashplate angle characteristic curve which is different for Clockwise and Counter-clockwise rotation E-frames. Although each pair of curves will be unique for individual pumps, a general example of what to expect is provided below for both Clockwise and Counter-clockwise rotation units with the **Right** angle sensor position.

General Information

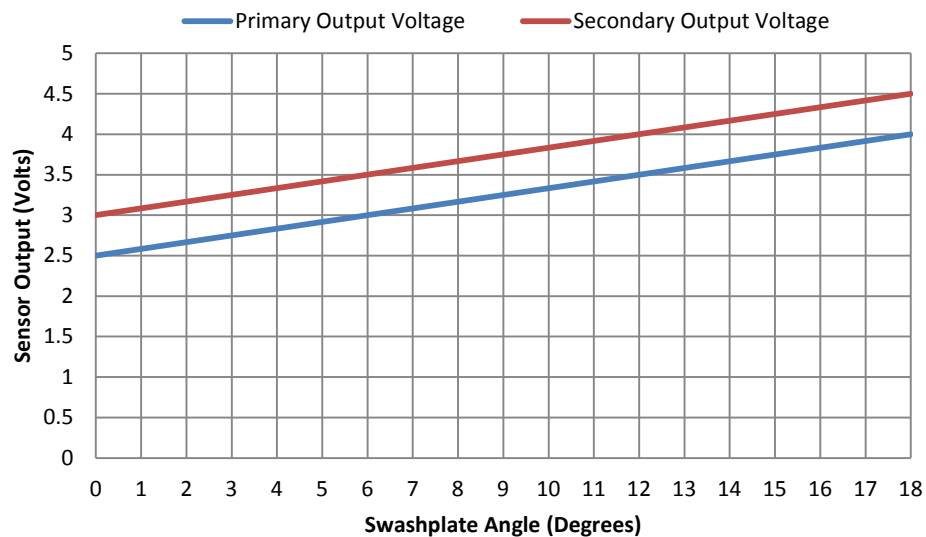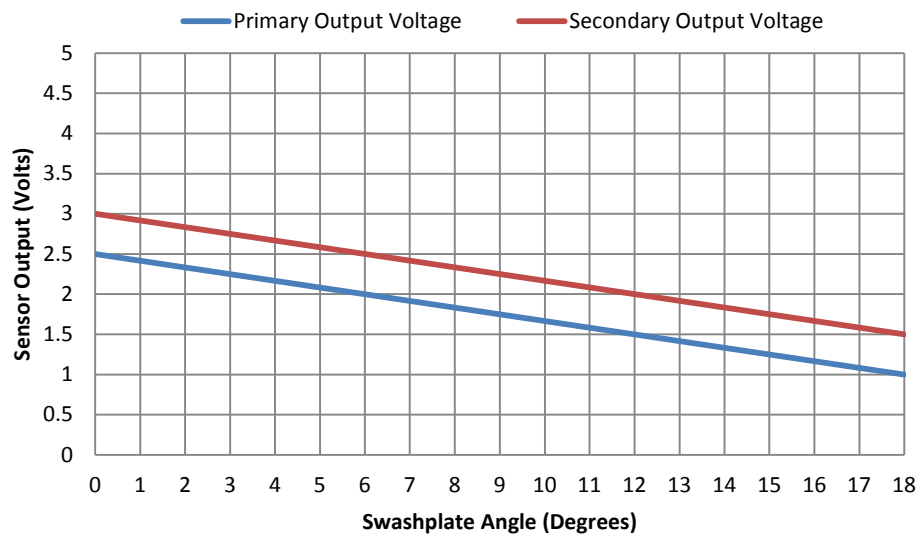

General Information

Angle sensor electrical specifications

Electrical specifications

| Description | Minimum | Typical | Maximum | Unit | Note |
|--|-----------|----------|-----------|---------|--|
| Supply (V+) | 4.75 | 5 | 5.25 | Vdc | Sensor is ratiometric in the voltage range |
| Supply protection | — | — | 28 | Vdc | Sensor will switch off above 5.5 V |
| Supply current drawn | — | 22 | 25 | mA | Sensor supply at 5 V |
| Output short circuit current (VDD to SIG 1/2 and GND to SIG 1/2) | — | — | 7.5 | mA | Additional 7.5 mA for each sensor signal, total sensor $7.5 \times 2 + 22 = 37$ mA typical for FSO |
| Resolution | — | 0.03 | — | degree | 11 bit output channel |
| Hysteresis | — | — | — | — | Design of sensor eliminates any mechanical hysteresis |
| Environment temperature range | -40 (-40) | 80 (176) | 104 (220) | °C (°F) | If temperature limits are exceeded, the sensor will function at a reduced level of performance |
| Operating temperature range | 20 (68) | 50 (122) | 95 (203) | °C (°F) | Temperature of oil |
| Storage temperature | -40 (-40) | — | 125 (257) | °C (°F) | — |
| Refresh rate of the sensor | — | — | 100 | µs | Internal ADC refresh rate |

Angle Sensor Calibration

A 2-point calibration of the sensor is recommended, with points measured at pump standby, and maximum pump stroke. Maximum pump stroke can be achieved when the pump input shaft is not being turned, as Series 45 pumps are biased to maximum displacement. In some cases the pump may need to be turned momentarily to ensure the pump is in the maximum displacement position; this can be achieved through a momentary switching of the engine starter on/off.

Angle Sensor Functionality

The Series 45 angle sensor option is intended for functionality such as electronic torque limiting, duty cycle measurement, troubleshooting, etc. The angle sensor is PLUS+1 compliant with an available hardware compliance block.

Angle Sensor Intended Functionality:

- Electronic Torque Limiting
- Duty Cycle Recording
- Troubleshooting

Angle Sensor Unsupported Functionality:

- Displacement/Flow Control

Charge Pump Circuits

This section includes two general circuits for providing charge pressure to Series 45 pumps.

Example Circuit #1

Example Circuit #1 shows a generic open circuit charging layout.


In applications where the Series 45 pump does not have the required inlet pressure available, an external charge pump may be used to increase the inlet pressure to an acceptable level. Scenarios in which this may occur include a layout with the pump above the reservoir, high altitude conditions, etc.

For circuit type #1, follow these recommendations:

General Information

- Size the charge pump so that its flow is 10 to 20% greater than the Series 45 flow rate at worst case conditions
- Include a relief valve or check valve, as shown, between the charge pump and S45 pump with an initial pressure setting of up to 10 bar; if aeration at the inlet of the S45 pump is still present, increase the relief/cracking pressure up to 20 bar (maximum).

Generic open circuit

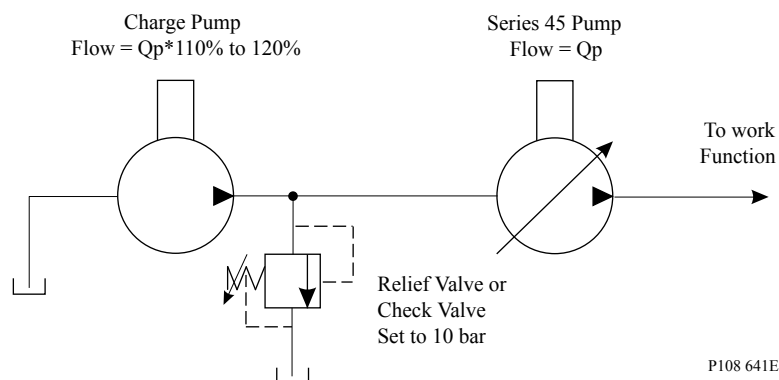

Example Circuit #2

Example Circuit #2 shows a semi-closed circuit charging layout.


In applications where the Series 45 pump does not have the required inlet pressure available, an external charge pump may be used to increase the inlet pressure to an acceptable level. Scenarios in which this may occur include a layout with the pump above the reservoir, high altitude conditions, etc.

For circuit type #2, follow these recommendations:

- Determine if the work function ever consumes more flow than it expels (for example: double acting or single acting cylinders). If so, determine the maximum flow differential in/out of the work function.
- Size the charge pump so that its flow is 10-20% of the Series 45 pump flow at worst case conditions, and increase this size by any work function flow differential which may occur.
- An inline oil cooler may be required for this type of circuit.
- Include an oil filter after the oil cooler; this ensures that any sediment in the oil cooler that may be dislodged due to vibration or any other reason is caught in the filter.
- Include a relief valve or check valve between the charge pump and S45 pump with an initial pressure setting of up to 10 bar; if aeration at the inlet of the S45 pump is still present, increase the relief/cracking pressure up to 20 bar (maximum).

General Information

Semi-closed circuit

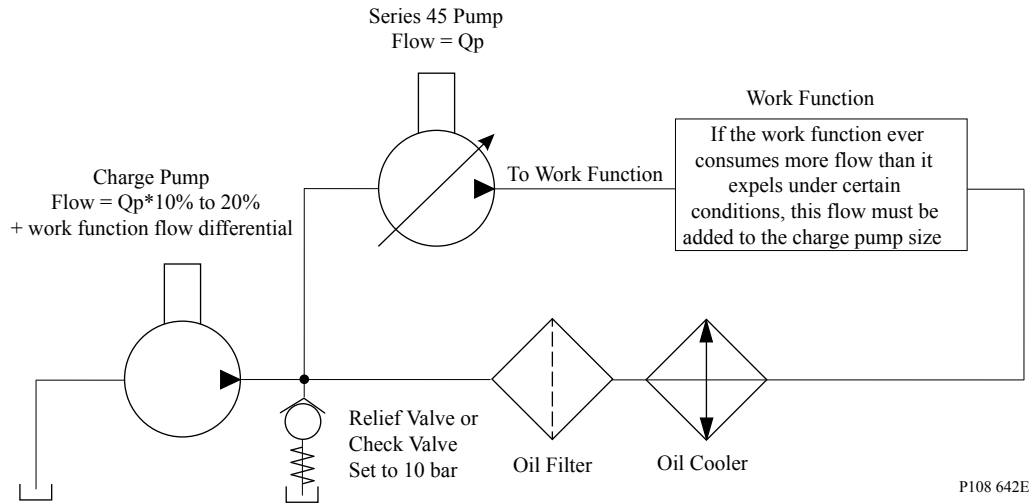

Operating parameters

Fluids

Ratings and performance data for Series 45 products are based on operating with premium hydraulic fluids containing oxidation, rust, and foam inhibitors. These include premium turbine oils, API CD engine oils per SAE J183, M2C33F or G automatic transmission fluids (ATF), Dexron II (ATF) meeting Allison C-3 or Caterpillar T0-2 requirements, and certain specialty agricultural tractor fluids. For more information on hydraulic fluid selection, see Danfoss publication **BC152886484524** Hydraulic Fluids and Lubricants, Technical Information, and **520L0465** Experience with Biodegradable Hydraulic Fluids, Technical Information.

Viscosity

Fluid viscosity limits

| Condition | | mm ² /s (cSt) | SUS |
|-----------|---------------------------|--------------------------|------|
| v min. | continuous | 9 | 58 |
| | intermittent | 6.4 | 47 |
| v max. | continuous | 110 | 500 |
| | intermittent (cold start) | 1000 | 4700 |

Maintain fluid viscosity within the recommended range for maximum efficiency and pump life.

Minimum Viscosity – This should only occur during brief occasions of maximum ambient temperature and severe duty cycle operation.

Maximum Viscosity – This should only occur at cold start. Pump performance will be reduced. Limit speeds until the system warms up.

Temperature

Oil temperature limits are defined at the pump's case drain. As a rule of thumb, under steady state conditions the case drain temperature is approximately 20 - 25 degrees Centegrade higher than the pump's inlet oil temperature.

General Information

Frame L, K, J, F, & E Temperature Limits

| | |
|---------------------------------------|-------------------|
| Minimum (intermittent, cold start) | - 40° C [- 40° F] |
| Continuous | 82° C [180° F] |
| Maximum Intermittent | 104° C [220° F] |

Frame L, K, J, F, & E Maximum Temperature limits are based on material properties. Don't exceed it. Measure temperature at the case drain of the pump.

K2 Frame Temperature Limits

| | |
|---------------------------------------|-------------------|
| Minimum (intermittent, cold start) | - 40° C [- 40° F] |
| Continuous | 104° C [219° F] |
| Maximum Intermittent | 115° C [239° F] |

Frame K2 Maximum temperature limits are higher than other frame sizes & based on improved swashplate bearing material capabilities. Continuous operation at the Maximum Intermittent Temperature is possible with K2 if fluid viscosity requirements are maintained. *Minimum temperature* for all frame sizes relates to the physical properties of the component materials. Cold oil will not affect the durability of the pump components. However, it may affect the ability of the pump to provide flow and transmit power.

Ensure fluid temperature and viscosity limits are concurrently satisfied.

Inlet pressure

Inlet pressure limits

| | |
|-------------------------|--|
| Minimum (continuous) | 0.8 bar absolute [6.7 in. Hg vac.] (at reduced maximum speed) |
| Minimum (cold start) | 0.5 bar absolute [15.1 in. Hg vac.] |

Maintain inlet pressure within the limits shown in the table. Refer to Inlet pressure vs. speed charts for each displacement.

Case pressure

Case pressure limits

| | |
|------------------------------|-----------------------------|
| Maximum (continuous) | 0.5 bar [7 psi] above inlet |
| Intermittent (cold start) | 2 bar [29 psi] above inlet |

Maintain case pressure within the limits shown in the table. The housing must always be filled with hydraulic fluid.

Caution

Operating outside of inlet and case pressure limits will damage the pump. To minimize this risk, use full size inlet and case drain plumbing, and limit line lengths.

General Information

Pressure ratings

The specification tables in each section give maximum pressure ratings for each displacement. Not all displacements within a given frame operate under the same pressure limits. Definitions of the operating pressure limits appear below.

Continuous working pressure is the average, regularly occurring operating pressure. Operating at or below this pressure should yield satisfactory product life. For all applications, the load should move below this pressure. This corresponds to the maximum allowable PC setting.

Maximum (peak) working pressure is the highest intermittent pressure allowed. Maximum machine load should never exceed this pressure, and pressure overshoots should not exceed this pressure. *See [Duty cycle and pump life](#).

Speed ratings

The specification tables in each section give minimum, maximum, and rated speeds for each displacement. Not all displacements within a given frame operate under the same speed limits. Definitions of these speed limits appear below.

Rated speed is the fastest recommended operating speed at full displacement and 1 bar abs. [0 in Hg vac] inlet pressure. Operating at or below this speed should yield satisfactory product life.

Maximum speed is the highest recommended operating speed at full power conditions. Operating at or beyond maximum speed requires positive inlet pressure and/or a reduction of pump outlet flow. Refer to Inlet pressure vs. speed charts for each displacement.

Minimum speed is the lowest operating speed allowed. Operating below this speed will not yield satisfactory performance.

Duty cycle and pump life

Knowing the operating conditions of your application is the best way to ensure proper pump selection. With accurate duty cycle information, your Danfoss representative can assist in calculating expected pump life.


General Information

Speed, flow, and inlet pressure

Inlet pressure vs. speed charts in each section show the relationship between speed, flow, and inlet pressure for each displacement. Use these charts to ensure your application operates within the prescribed range.

The charts define the area of inlet pressures and speeds allowed for a given displacement. Operating at lower displacements allows greater speed or lower inlet pressure.

Sample inlet pressure vs. speed chart

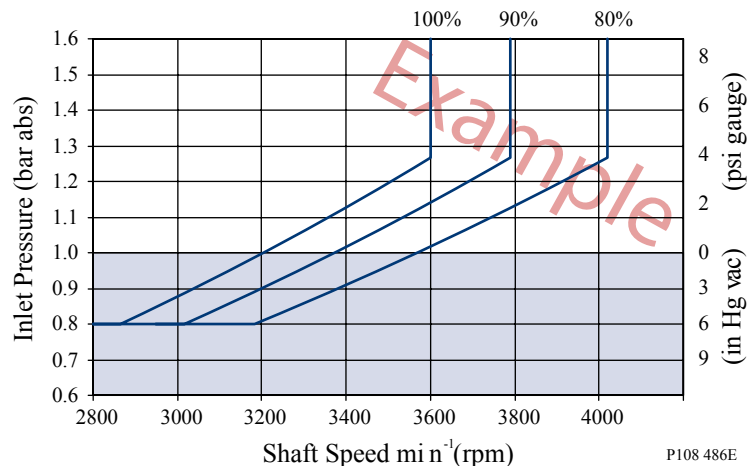

Operating limit at 80% displacement

Operating limit at 90% displacement

Operating limit at 100% displacement

General Information

Design parameters

Installation

Series 45 pumps may be installed in any position. To optimize inlet conditions, install the pump at an elevation below the minimum reservoir fluid level. Design inlet plumbing to maintain inlet pressure within prescribed limits (see [Inlet pressure](#) limits)

Fill the pump housing and inlet line with clean fluid during installation. Connect the case drain line to the uppermost drain port (L1 or L2) to keep the housing full during operation.

To allow unrestricted flow to the reservoir, use a dedicated drain line. Connect it below the minimum reservoir fluid level and as far away from the reservoir outlet as possible. Use plumbing adequate to maintain case pressure within prescribed limits (see [Case pressure](#) limits,).

Filtration

To prevent damage to the pump, including premature wear, fluid entering the pump inlet must be free of contaminants. Series 45 pumps require system filtration capable of maintaining fluid cleanliness at ISO 4406-1999 class 22/18/13 or better.

Danfoss does not recommend suction line filtration. Suction line filtration can cause high inlet vacuum, which limits pump operating speed. Instead we recommend a 125 µm (150 mesh) screen in the reservoir covering the pump inlet. This protects the pump from coarse particle ingestion.

Return line filtration is the preferred method for open circuit systems. Consider these factors when selecting a system filter:

- Cleanliness specifications
- Contaminant ingress rates
- Flow capacity
- Desired maintenance interval

Typically, a filter with a beta ratio of $\beta_{10} = 10$ is adequate. However, because each system is unique, only a thorough testing and evaluation program can fully validate the filtration system. For more information, see Danfoss publication **BC152886482150** Design Guidelines for Hydraulic Fluid Cleanliness.

Reservoir

The reservoir provides clean fluid, dissipates heat, and removes entrained air from the hydraulic fluid. It allows for fluid volume changes associated with fluid expansion and cylinder differential volumes. Minimum reservoir capacity depends on the volume needed to perform these functions. Typically, a capacity of one to three times the pump flow (per minute) is satisfactory.

Locate the reservoir outlet (suction line) near the bottom, allowing clearance for settling foreign particles. Place the reservoir inlet (return lines) below the lowest expected fluid level, as far away from the outlet as possible.

Fluid velocity

Choose piping sizes and configurations sufficient to maintain optimum fluid velocity, and minimize pressure drops. This reduces noise, pressure drops, and overheating. It maximizes system life and performance.

Recommended fluid velocities

| | |
|--------------|--------------------------------|
| System lines | 6 to 9 m/sec [20 to 30 ft/sec] |
| Suction line | 1 to 2 m/sec [4 to 6 ft/sec] |
| Case drain | 3 to 5 m/sec [10 to 15 ft/sec] |

Typical guidelines; obey all pressure ratings.

General Information

Velocity equations

SI units

Q = flow (l/min)

A = area (mm²)

Velocity = (16.67•Q)/A (m/sec)

US units

Q = flow (US gal/min)

A = area (in²)

Velocity = (0.321•Q)/A (ft/sec)

Shaft loads

Series 45 pumps have tapered roller bearings capable of accepting external radial and thrust (axial) loads. The external radial shaft load limits are a function of the load position, orientation, and the operating conditions of the pump.

The maximum allowable radial load (R_e) is based on the maximum external moment (M_e) and the distance (L) from the mounting flange to the load. Compute radial loads using the formula below. Tables in each section give maximum external moment (M_e) and thrust (axial) load (T_{in} , T_{out}) limits for each pump frame size and displacement.

Radial load formula


$$M_e = R_e \cdot L$$

L = Distance from mounting flange to point of load

M_e = Maximum external moment

R_e = Maximum radial side load

Shaft load orientation

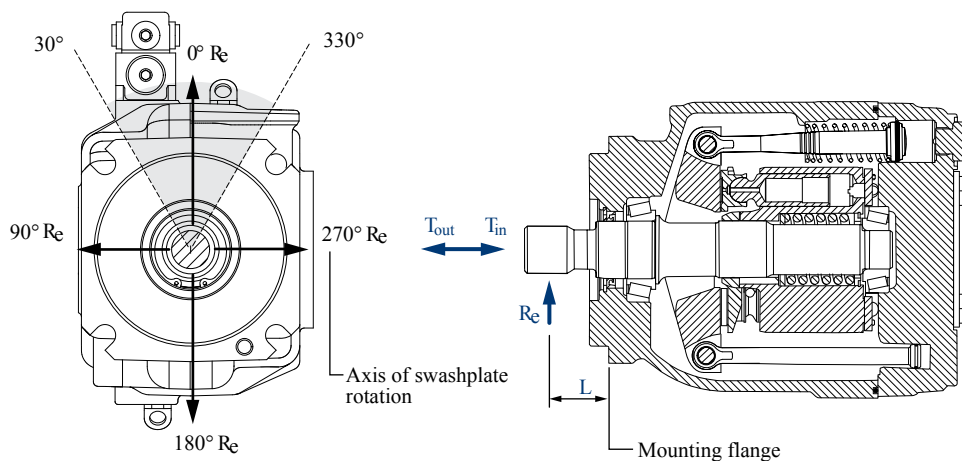

P101 080E

Bearing life

All shaft loads affect bearing life. In applications where external shaft loads can not be avoided, maximize bearing life by orientating the load between the 30° and 330° positions, as shown. Tapered input shafts or clamp-type couplings are recommended for applications with radial shaft loads.

General Information

Mounting flange loads


Adding auxiliary pumps and/or subjecting pumps to high shock loads may overload the pump mounting flange. Tables in each section give allowable continuous and shock load moments for each frame size. Applications with loads outside allowable limits require additional pump support.

- Shock load moment (M_s) is the result of an instantaneous jolt to the system.
- Continuous load moments (M_c) are generated by the typical vibratory movement of the application.

Estimating overhung load moments

Use the equations below to estimate the overhung load moments for multiple pump mounting. See installation drawings in each section to find the distance from the mounting flange to the center of gravity for each frame size. Refer to the technical specifications in each section to find pump weight.

Overhung load example

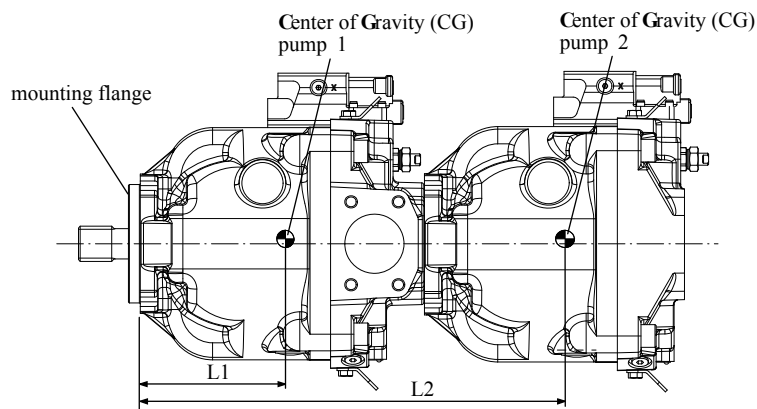

P101 081E

Shock load formula

$$M_s = G_s \cdot K \cdot (W_1 \cdot L_1 + W_2 \cdot L_2 + \dots + W_n \cdot L_n)$$

Continuous load formula

$$M_c = G_c \cdot K \cdot (W_1 \cdot L_1 + W_2 \cdot L_2 + \dots + W_n \cdot L_n)$$

SI units

M_s = Shock load moment (N·m)

M_c = Continuous (vibratory) load moment (N·m)

G_s = Acceleration due to external shock (G's)

G_c = Acceleration due to continuous vibration (G's)

K = Conversion factor = 0.00981

W_n = Mass of nth pump (kg)

L_n = Distance from mounting flange to nth pump CG (mm)

US units

M_s = Shock load moment (lbf·in)

M_c = Continuous (vibratory) load moment (lbf·in)

G_s = Acceleration due to external shock (G's)

G_c = Acceleration due to continuous vibration (G's)

K = Conversion factor = 1

W_n = Weight of nth pump (lb)

General Information


L_n = Distance from mounting flange to nth pump CG (in)

Auxiliary mounting pads

Auxiliary mounting pads are available for all radial ported Series 45 pumps. Since the auxiliary pad operates under case pressure, use an O-ring to seal the auxiliary pump mounting flange to the pad. Oil from the main pump case lubricates the drive coupling.

- All mounting pads meet SAE J744 Specifications.
- The combination of auxiliary shaft torque and main pump torque must not exceed the maximum pump input shaft rating. Tables in each section give input shaft torque ratings for each frame size.
- Applications subject to severe vibratory or shock loading may require additional support to prevent mounting flange damage. Tables in each section give allowable continuous and shock load moments for each frame size.
- The drawing and table below give mating pump dimensions for each size mount. Refer to installation drawings in each section for auxiliary mounting pad dimensions.

Mating pump specifications

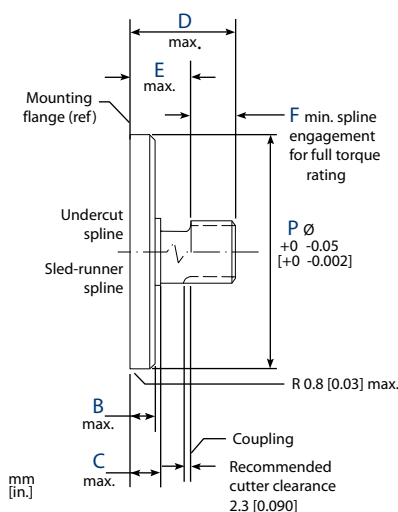

Dimensions

| | SAE A | SAE B | SAE C |
|---|------------------|-------------------|-------------------|
| P | 82.55 [3.250] | 101.60 [4.000] | 127.00 [5.000] |
| B | 6.35 [0.250] | 9.65 [0.380] | 12.70 [0.500] |
| C | 12.70 [0.500] | 15.20 [0.600] | 23.37 [0.920] |
| D | 58.20 [2.290] | 53.10 [2.090] | 55.60 [2.190] |
| E | 15.00 [0.590] | 17.50 [0.690] | 30.50 [1.200] |
| F | 13.50 [0.530] | 14.20 [0.560] | 18.30 [0.720] |

Input shaft torque ratings

Input shaft tables in each section give maximum torque ratings for available input shafts. Ensure that your application respects these limits.

General Information

Maximum torque ratings are based on shaft strength. Do not exceed them.

Coupling arrangements that are not oil-flooded provide a reduced torque rating. Contact your Danfoss representative for proper torque ratings if your application involves non oil-flooded couplings.

Danfoss recommends mating splines adhere to ANSI B92.1-Class 6e. Danfoss external splines are class 5 fillet root side fit. Tolerance classes 5 and 6e have the same minimum effective space width and maximum effective tooth thickness limits to ensure interchangeability between mating parts. Tables in each section give full spline dimensions and data.

Understanding and minimizing system noise

Charts in each section give sound levels for each frame size and displacement. Sound level data are collected at various operating speeds and pressures in a semi-anechoic chamber. Many factors contribute to the overall noise level of any application. Below is some information to help understand the nature of noise in fluid power systems, and some suggestions to help minimize it.

Noise is transmitted in fluid power systems in two ways: as fluid borne noise, and structure borne noise.

Fluid-borne noise (pressure ripple or pulsation) is created as pumping elements discharge oil into the pump outlet. It is affected by the compressibility of the oil, and the pump's ability to transition pumping elements from high to low pressure. Pulsations travel through the hydraulic lines at the speed of sound (about 1400 m/s [4600 ft/sec] in oil) until there is a change (such as an elbow) in the line. Thus, amplitude varies with overall line length and position.

Structure-borne noise is transmitted wherever the pump casing connects to the rest of the system. The way system components respond to excitation depends on their size, form, material, and mounting.

System lines and pump mounting can amplify pump noise. Follow these suggestions to help minimize noise in your application:

- Use flexible hoses.
- Limit system line length.
- If possible, optimize system line position to minimize noise.
- If you must use steel plumbing, clamp the lines.
- If you add additional support, use rubber mounts.
- Test for resonants in the operating range, if possible avoid them.

Understanding and minimizing system instability

Knowing the operating conditions and system setup of your application is the best way to ensure a stable system. All fan-drive circuits should use a choke orifice to ensure system stability. With accurate system information, your Danfoss representative can assist you in the selection of a servo control orifice.

LS System Over-Signaling

To optimize the life and performance of Series 45 products using Load Sensing controls, it is important to ensure the margin pressure signal at the pump's control is conditioned in a way which does not damage the control's internal components.

Caution

Excessive component wear may occur when margin pressures > 60 bar are imposed on the LS spool. Reduce margin pressures to 60 bar or less.

Margin pressure defines the physical movement of the LS spool and subsequent modulation of pump flow to the system and is defined by:

$$P_{\text{Margin}} = P_{\text{System}} - P_{\text{Load Sense}} \quad \text{Margin Pressure}$$

General Information

LS System Over-Signaling results when the actual margin pressure magnitude exceeds the minimum pressure required to shift the LS spool. It is important to limit excessive margin pressures in transient system conditions to ensure satisfactory control component life.

For more information on LS System Over-signaling please contact your Danfoss Representative.

Sizing equations

Use these equations to help select the right pump size, displacement and power requirements for your application

| | Based on SI units | | Based on US units |
|---------------|--|--|--|
| <i>Flow</i> | Output flow Q = $\frac{V_g \cdot n \cdot \eta_v}{1000}$ (l/min) | | Output flow Q = $\frac{V_g \cdot n \cdot \eta_v}{231}$ (US gal/min) |
| <i>Torque</i> | Input torque M = $\frac{V_g \cdot \Delta p}{20 \cdot \pi \cdot \eta_m}$ (N·m) | | Input torque M = $\frac{V_g \cdot \Delta p}{2 \cdot \pi \cdot \eta_m}$ (lbf·in) |
| <i>Power</i> | Input power P = $\frac{M \cdot n \cdot \pi}{30\,000} = \frac{Q \cdot \Delta p}{600 \cdot \eta_t}$ (kW) | | Input power P = $\frac{M \cdot n \cdot \pi}{198\,000} = \frac{Q \cdot \Delta p}{1714 \cdot \eta_t}$ (hp) |

Variables

SI units [US units]

| | |
|----------------------|---|
| V_g | Displacement per revolution cm ³ /rev [in ³ /rev] |
| p_o | Outlet pressure bar [psi] |
| p_i | Inlet pressure bar [psi] |
| Δp | p _o - p _i (system pressure) bar [psi] |
| n | Speed min ⁻¹ (rpm) |
| η_v | Volumetric efficiency |
| η_m | Mechanical efficiency |
| η_t | Overall efficiency (η _v · η _m) |


Frame K2

Design

Series 45 Frame K2 pumps have a single servo piston design with a cradle-type swashplate set in polymer-coated journal bearings. A bias spring and internal forces increase swashplate angle. The servo piston decreases swashplate angle. Nine reciprocating pistons displace fluid from the pump inlet to the pump outlet as the cylinder block rotates on the pump input shaft. The block spring holds the piston slippers to the swashplate via the slipper retainer. The cylinder block rides on a bi-metal valve plate optimized for high volumetric efficiency and low noise. Tapered roller bearings support the input shaft and a viton lip-seal protects against shaft leaks.

An adjustable one spool (PC only, not shown) or two spool (LS and remote PC) control senses system pressure and load pressure (LS controls). The control ports system pressure to the servo piston, adjusting swashplate angle to control pump output flow.

Frame K2 cross section

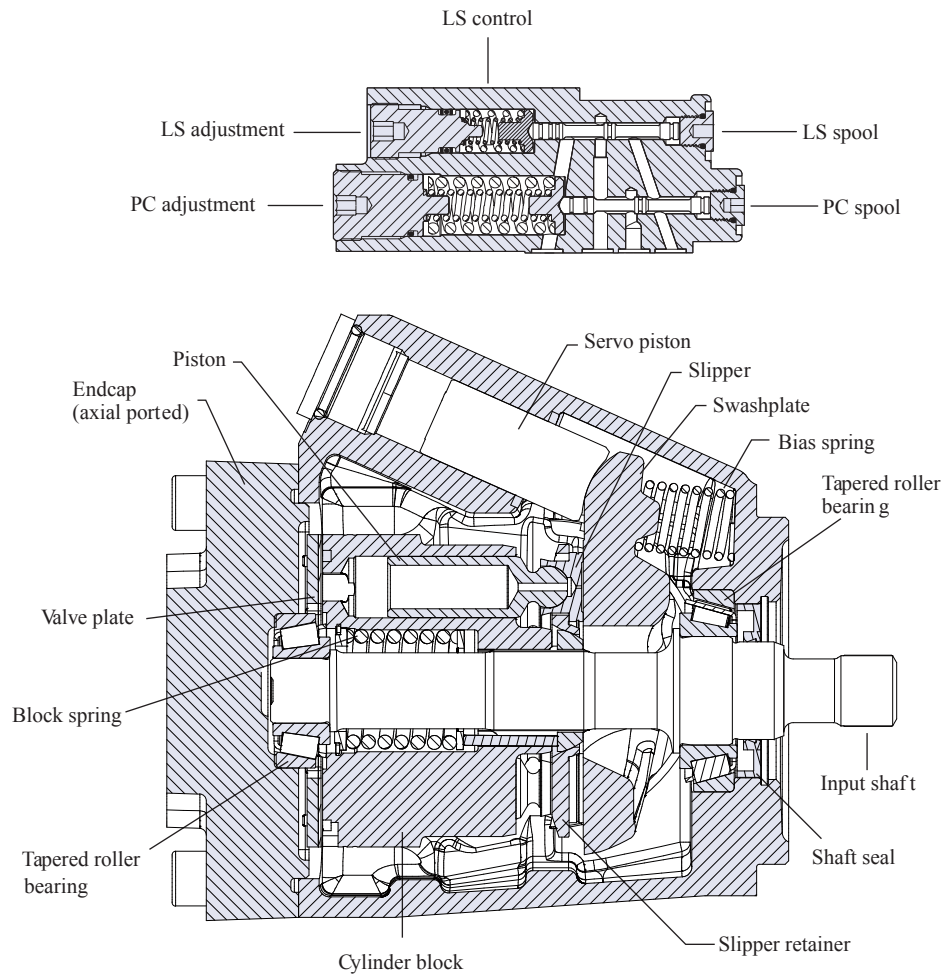

P109073

Frame K2

Technical Specifications

| Description | | Unit | K2 Frame | | | | |
|---|-----------------------------|---|-------------------|-------------------|-------------------|-------------------|-------------------|
| | | | 25C | 30C | 38C | 40C | 45C |
| Maximum Displacement | | cm ³ [in ³] | 25 [1.53] | 30 [1.83] | 38 [2.32] | 40 [2.44] | 45 [2.75] |
| Working Input Speed | Minimum | min ⁻¹ (rpm) | 500 | 500 | 500 | 500 | 500 |
| | Continuous | | 3450 | 3200 | 2900 | 3100 | 2900 |
| | Maximum | | 3750 | 3450 | 3050 | 3200 | 3050 |
| Working Pressure | Continuous | bar [psi] | 260 [3771] | | | | |
| | Maximum | | 350 [5075] | | | | |
| Flow at rated speed (theoretical) | | l/min [US gal/min] | 86.3 [22.8] | 96.0 [25.4] | 110.2 [29.1] | 124 [32.8] | 130.5 [34.5] |
| Input torque at maximum displacement (theoretical) at 49° C [120°F] | | N•m/bar [lbf•in/1000 psi] | 0.398 [243] | 0.477 [291] | 0.605 [369] | 0.636 [389] | 0.716 [438] |
| Mass moment of inertia of internal rotating components | | kg•m ² [slug•ft ²] | 0.00184 [0.00135] | 0.00184 [0.00135] | 0.00184 [0.00135] | 0.00203 [0.00150] | 0.00203 [0.00150] |
| Weight - Axial ports | | kg [lb] | 16 [35] | | | | |
| Weight - Radial ports (no through drive) | | | 17 [37] | | | | |
| External Shaft Loads | External moment (Me) | N•m [lbf•in] | 61 [540] | 61 [540] | 76 [673] | 76 [673] | 76 [673] |
| | Thrust in (Tin), out (Tout) | N [lbf] | 1000 [225] | 1000 [225] | 1200 [270] | 1200 [270] | 1200 [270] |
| Mounting flange load moments | Vibratory (continuous) | N•m [lbf•in] | 1005 [8895] | | | | |
| | Shock (maximum) | | 3550 [31420] | | | | |

Order Code

Code description

| Code | Description |
|------|--|
| R | Product Frame, Variable Open Circuit Pump |
| S | Rotation |
| P | Displacement |
| C | Control Type |
| D | Pressure Compensator Setting |
| E | Load Sense Setting |
| F | Not Used |
| G | Choke Orifice |
| H | Gain Orifice |
| J | Input Shaft/Auxiliary Mount/Endcap |
| K | Shaft Seal/Front Mounting Flange/Housing Ports |
| L | Displacement Limiter |
| M | Special Hardware |
| N | Special Features |

R Frame

| | | K2 Frame | | | | |
|----|---|----------|------|------|------|------|
| | | 025C | 030C | 038C | 040C | 045C |
| K2 | K2 Frame, variable displacement open circuit pump | • | • | • | • | • |

Frame K2

S Rotation

| | | K2 Frame | | | | |
|---|------------------------------|----------|------|------|------|------|
| | | 025C | 030C | 038C | 040C | 045C |
| L | Left Hand (counterclockwise) | • | • | • | • | • |
| R | Right Hand (clockwise) | • | • | • | • | • |

P Displacement

| | | | | | | |
|------|---|---|---|---|---|---|
| 025C | 25 cm ³ /rev [1.53 in ³ /rev] | • | | | | |
| 030C | 30 cm ³ /rev [1.83 in ³ /rev] | | • | | | |
| 038C | 38 cm ³ /rev [2.32 in ³ /rev] | | | • | | |
| 040C | 40 cm ³ /rev [2.44 in ³ /rev] | | | | • | |
| 045C | 45 cm ³ /rev [2.75 in ³ /rev] | | | | | • |

C Control type

| | | K2 Frame | | | | |
|----|---|----------|------|------|------|------|
| | | 025C | 030C | 038C | 040C | 045C |
| PC | Pressure Compensator | • | • | • | • | • |
| RP | Remote Pressure Compensator | • | • | • | • | • |
| LB | Load Sensing/Pressure Comp. w/Bleed Orifice | • | • | • | • | • |
| LS | Load Sensing/Pressure Comp. | • | • | • | • | • |
| FB | Electric Dump valve (On/Off) w/Load sensing / Pressure comp. (NC,12VDC), Left | • | • | • | • | • |
| AH | Electric Proportional Pressure Control w/ Pressure comp. (NC,12VDC), Left | • | • | • | • | • |
| AL | Electric Proportional Pressure Control w/ Pressure comp. (NC,24VDC), Left | • | • | • | • | • |
| AX | Electric Proportional Pressure Control w/ Pressure comp. (NO,12VDC), Left | • | • | • | • | • |
| CL | Electric Proportional Pressure Control w/ Pressure comp. (NO,24VDC), Left | • | • | • | • | • |
| AR | Electric On/Off Pressure Control w/Pressure comp. (NC,12VDC), Left | • | • | • | • | • |
| CR | Electric On/Off Pressure Control w/Pressure comp. (NC,24VDC), Left | • | • | • | • | • |
| AN | Electric On/Off Pressure Control w/Pressure comp. (NO,12VDC), Left | • | • | • | • | • |
| CN | Electric On/Off Pressure Control w/Pressure comp. (NO,24VDC), Left | • | • | • | • | • |
| SA | Fan drive control (12Vdc),100-210 Bar, Left | • | • | • | • | • |
| SB | Fan drive control (24Vdc),100-210 Bar, Left | • | • | • | • | • |
| SC | Fan drive control (12Vdc),220-260 Bar, Left | • | • | • | • | • |
| SD | Fan drive control (24Vdc),220-260 Bar, Left | • | • | • | • | • |

D PC setting (2 digit code, 10 bar increments)

| | | | | | | |
|---------|-----------------------------------|---|---|---|---|---|
| Example | 25 = 250 bar (3625 psi) | | | | | |
| 10-26 | 100 to 260 bar [1450 to 3771 psi] | • | • | • | • | • |

Frame K2

E Load sensing setting (2 digit code, 1 bar increments)

| | | K2 Frame | | | | |
|---------|---|----------|------|------|------|------|
| | | 025C | 030C | 038C | 040C | 045C |
| Example | 20 = 20 bar (290 psi) | | | | | |
| 10-40 | 10 to 40 bar [145 to 580 psi] | • | • | • | • | • |
| NN | Not applicable (pressure compensated only controls) | • | • | • | • | • |

F Not used

| | | | | | | |
|----|----------------|---|---|---|---|---|
| NN | Not applicable | • | • | • | • | • |
|----|----------------|---|---|---|---|---|

G Servo Control Orifice

| | | | | | | |
|---|---|---|---|---|---|---|
| N | None (standard) | • | • | • | • | • |
| E | 0.8 mm diameter - Electrical proportional controls only | • | • | • | • | • |
| F | 1.0 mm diameter - Electrical proportional controls only | • | • | • | • | • |
| R | 0.8 mm diameter - FDC only | • | • | • | • | • |
| S | 1.0 mm diameter - FDC only | • | • | • | • | • |

H Gain Orifice

| | | | | | | |
|---|---------------------------------------|---|---|---|---|---|
| 3 | 0.7 mm diameter | • | • | • | • | • |
| E | Gain orifice FDC only, 1.2mm diameter | • | • | • | • | • |

J Input Shaft

| | |
|----|----------------------------------|
| C2 | 13 tooth, 16/32 pitch |
| C3 | 15 tooth, 16/32 pitch |
| K1 | 0.875 inch straight keyed |
| K2 | 0.875 inch straight keyed (long) |
| T1 | 1.0 inch tapered |

Auxiliary Mount/Endcap Style

| Code | Auxiliary Description | Endcap Style | Inlet Porting | Outlet Porting | Endcap Description |
|------|-----------------------|--------------|---------------|----------------|--|
| MF | None | Axial | O-Ring Boss | O-Ring Boss | Inlet - SAE O-Ring boss port (1.875 inch threads) Outlet - SAE O-Ring boss port (1.3125 inch threads) |
| MP | None | Axial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (1.25 inch port M10 threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port M10 threads) |
| NA | None | Axial | O-Ring Boss | O-Ring Boss | Inlet - ISO O-Ring boss port (M42 threads) Outlet - ISO O-Ring boss port (M33 threads) |
| MG | None | Radial | O-Ring Boss | O-Ring Boss | Inlet - SAE O-Ring boss port (1.875 inch threads) Outlet - SAE O-Ring boss port (1.3125 inch threads) |
| NS | None | Radial | O-Ring Boss | O-Ring Boss | Inlet - ISO O-Ring boss port (M48 threads) Outlet - ISO O-Ring boss port (M33 threads) |

Frame K2

Auxiliary Mount/Endcap Style (continued)

| Code | Auxiliary Description | Endcap Style | Inlet Porting | Outlet Porting | Endcap Description |
|------|--|--------------|---------------|----------------|---|
| MR | None | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (1.5 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) |
| RG | Running Cover | Radial | O-Ring Boss | O-Ring Boss | Inlet - SAE O-Ring boss port (1.875 inch threads) Outlet - SAE O-Ring boss port (1.3125 inch threads) |
| RR | Running Cover | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (1.5 inch port M12 threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port M10 threads) |
| AB | SAE-A 9 teeth, M10 threads | Radial | O-Ring Boss | O-Ring Boss | Inlet - ISO O-Ring boss port (M48 threads) Outlet - ISO O-Ring boss port (M33 threads) |
| AG | SAE-A, 9 teeth, M10 threads | Radial | O-Ring Boss | O-Ring Boss | Inlet - SAE O-Ring boss port (1.875 inch threads) Outlet - SAE O-Ring boss port (1.3125 inch threads) |
| AK | Integrated SAE-A, 9 teeth, M10 threads | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (1.5 inch port M12 threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port M10 threads) |
| FB | Integrated SAE-A, 9 teeth, M10 threads | Radial | O-Ring Boss | O-Ring Boss | Inlet - ISO O-Ring boss port (M48 threads) Outlet - ISO O-Ring boss port (M33 threads) |
| FG | Integrated SAE-A, 9 teeth, M10 threads | Radial | O-Ring Boss | O-Ring Boss | Inlet - SAE O-Ring boss port (1.875 inch threads) Outlet - SAE O-Ring boss port (1.3125 inch threads) |
| EK | SAE-A, 9 teeth, M10 threads | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (1.5 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) |
| TK | SAE-A, 11 teeth, M10 threads | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (1.5 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) |
| GG | SAE-A, 11 teeth, M10 threads | Radial | O-Ring Boss | O-Ring Boss | Inlet - SAE O-Ring boss port (1.875 inch threads) Outlet - SAE O-Ring boss port (1.3125 inch threads) |
| GT | SAE-A, 11 teeth, M10 threads | Radial | O-Ring Boss | O-Ring Boss | Inlet - ISO O-Ring boss port (M48 threads) Outlet - ISO O-Ring boss port (M33 threads) |
| BG | SAE-B, 13 teeth, M12 threads | Radial | O-Ring Boss | O-Ring Boss | Inlet - SAE O-Ring boss port (1.875 inch threads) Outlet - SAE O-Ring boss port (1.3125 inch threads) |
| BB | SAE-B, 13 teeth, M12 threads | Radial | O-Ring Boss | O-Ring Boss | Inlet - ISO O-Ring boss port (M48 threads) Outlet - ISO O-Ring boss port (M33 threads) |
| DR | SAE-B, 13 teeth, M12 threads | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (1.5 inch port M12 threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port M10 threads) |

Frame K2

Auxiliary Mount/Endcap Style (continued)

| Code | Auxiliary Description | Endcap Style | Inlet Porting | Outlet Porting | Endcap Description |
|------|-------------------------------|--------------|---------------|----------------|---|
| VG | SAE-BB, 15 teeth, M12 threads | Radial | O-Ring Boss | O-Ring Boss | Inlet - SAE O-Ring boss port (1.875 inch threads) Outlet - SAE O-Ring boss port (1.3125 inch threads) |
| VK | SAE-BB, 15 teeth, M12 threads | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (1.5 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) |

J Input Shaft/Auxiliary Mount/Endcap

| |
|------------------------|
| Available Combinations |
|------------------------|

| | K2 Frame | | | | |
|------|----------|------|------|------|------|
| | 025C | 030C | 038C | 040C | 045C |
| C2MF | • | • | • | • | • |
| C2MG | • | • | • | • | • |
| C2MP | • | • | • | • | • |
| C2MR | • | • | • | • | • |
| C2TK | • | • | • | • | • |
| C3AB | • | • | • | • | • |
| C3DR | • | • | • | • | • |
| C3MF | • | • | • | • | • |
| C3MG | • | • | • | • | • |
| C3MP | • | • | • | • | • |
| C3MR | • | • | • | • | • |
| K1RG | • | • | • | • | • |
| C2NA | • | • | • | • | • |
| C3NA | • | • | • | • | • |
| C2NS | • | • | • | • | • |
| C3NS | • | • | • | • | • |
| C2RR | • | • | • | • | • |
| C3RR | • | • | • | • | • |
| C2EK | • | • | • | • | • |
| C3EK | • | • | • | • | • |
| C3TK | • | • | • | • | • |
| C2DR | • | • | • | • | • |
| C2VK | • | • | • | • | • |
| C3VK | • | • | • | • | • |
| C2AK | • | • | • | • | • |
| C3AK | • | • | • | • | • |
| C3FG | • | • | • | • | • |
| C2AB | • | • | • | • | • |
| C2BB | • | • | • | • | • |
| C3BB | • | • | • | • | • |
| C2GT | • | • | • | • | • |

Frame K2

| | K2 Frame | | | | |
|------|----------|------|------|------|------|
| | 025C | 030C | 038C | 040C | 045C |
| C3GT | • | • | • | • | • |
| C2RG | • | • | • | • | • |
| C3RG | • | • | • | • | • |
| C2AG | • | • | • | • | • |
| C3AG | • | • | • | • | • |
| C2GG | • | • | • | • | • |
| C3GG | • | • | • | • | • |
| C2BG | • | • | • | • | • |
| C3BG | • | • | • | • | • |
| C2VG | • | • | • | • | • |
| C3VG | • | • | • | • | • |
| C3FB | • | • | • | • | • |
| C2FB | • | • | • | • | • |
| C2FG | • | • | • | • | • |
| K1AG | • | • | • | • | • |
| K1MF | • | • | • | • | • |
| K2MF | • | • | • | • | • |
| K2MG | • | • | • | • | • |
| K2MR | • | • | • | • | • |
| K2RG | • | • | • | • | • |

K Shaft seal

| | | K2 Frame | | | | |
|---|----------------------|----------|------|------|------|------|
| | | 025C | 030C | 038C | 040C | 045C |
| A | Single (Viton [FKM]) | • | • | • | • | • |

K Mounting flange and housing port style

| | | | | | | |
|---|--|---|---|---|---|---|
| 6 | SAE-B Flange 2-bolt/SAE O-ring boss ports [7/8-14] | • | • | • | • | • |
|---|--|---|---|---|---|---|

K Not used

| | | | | | | |
|---|----------------|---|---|---|---|---|
| N | Not applicable | • | • | • | • | • |
|---|----------------|---|---|---|---|---|

L Displacement limiter

| | | | | | | |
|-----|--------------------------------------|---|---|---|---|---|
| PLB | None (plugged) | • | • | • | • | • |
| AAA | Adjustable, factory set at max angle | • | • | • | • | • |

M Special hardware

| | | | | | | |
|-----|------|---|---|---|---|---|
| NNN | None | • | • | • | • | • |
|-----|------|---|---|---|---|---|






N Special features

| | | | | | | |
|-----|------|---|---|---|---|---|
| NNN | None | • | • | • | • | • |
|-----|------|---|---|---|---|---|

Frame K2

Performance K2-25C

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].

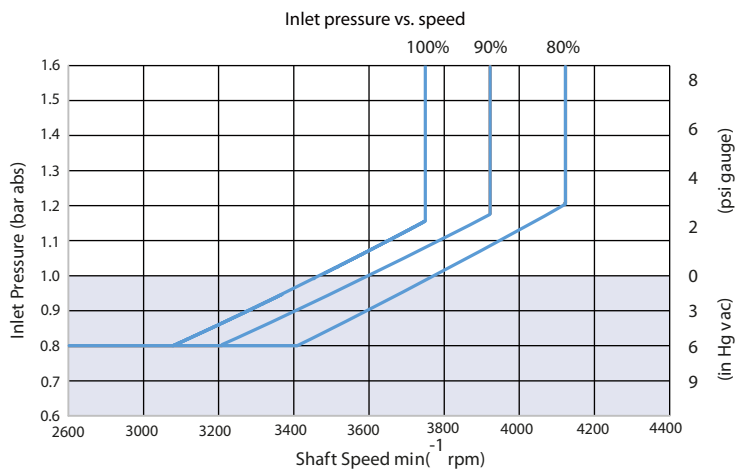
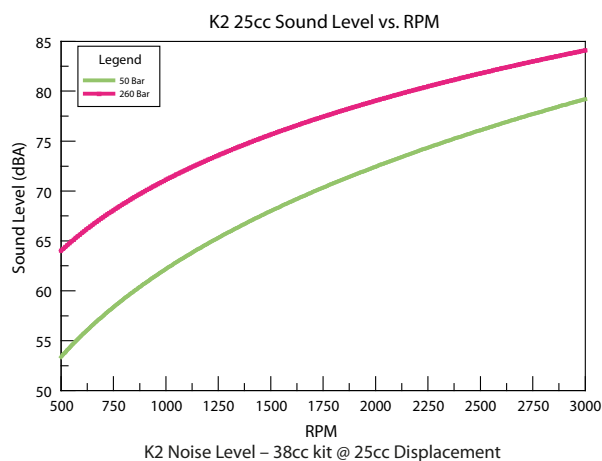
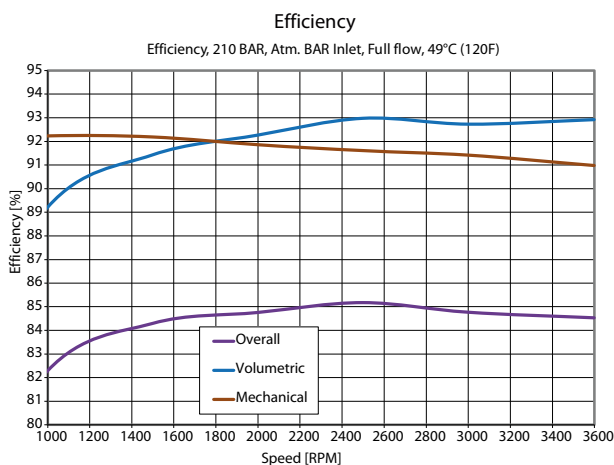
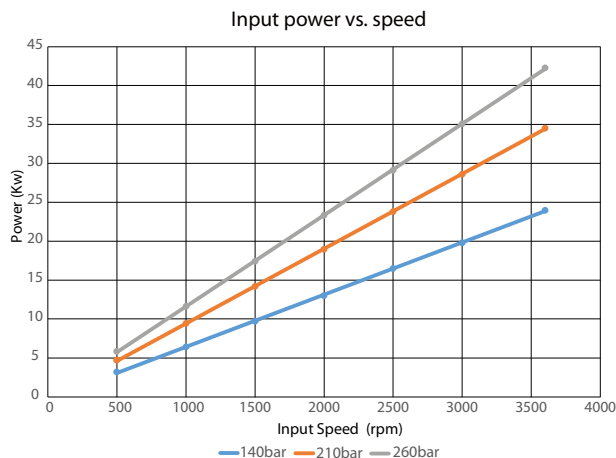
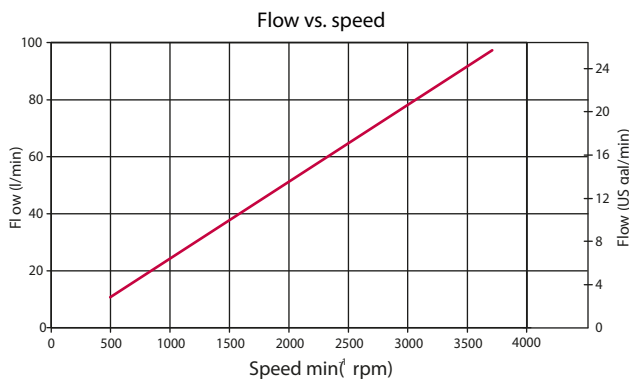


P109103

Frame K2

Performance K2-30C

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].

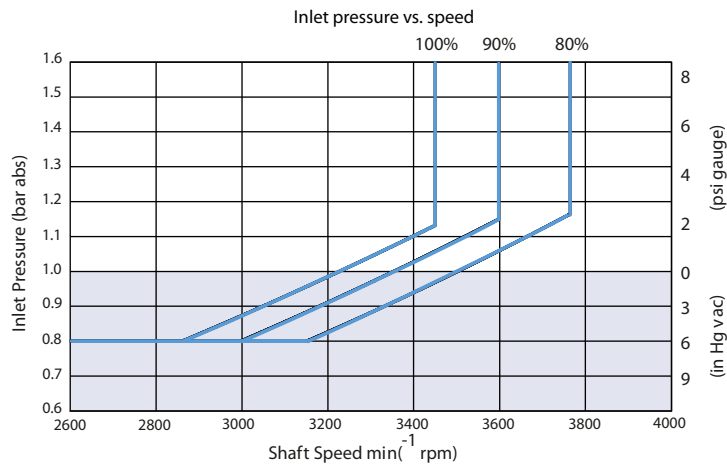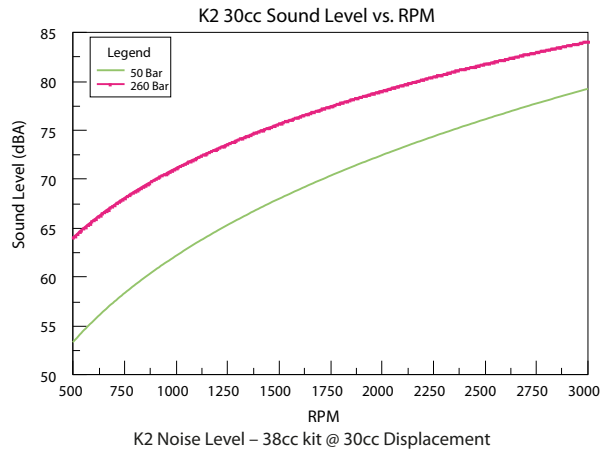
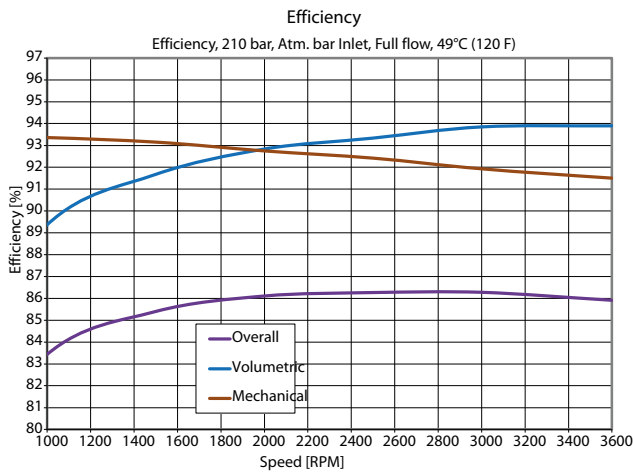
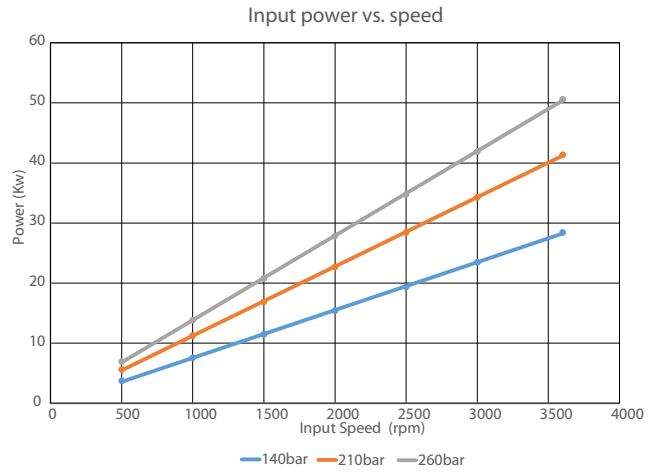
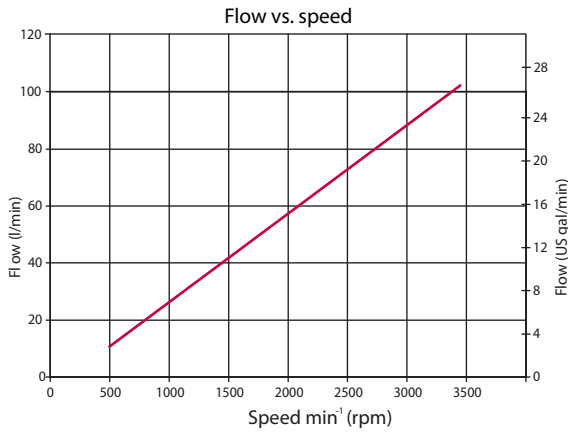


P109104


Frame K2

Performance K2-38C

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].

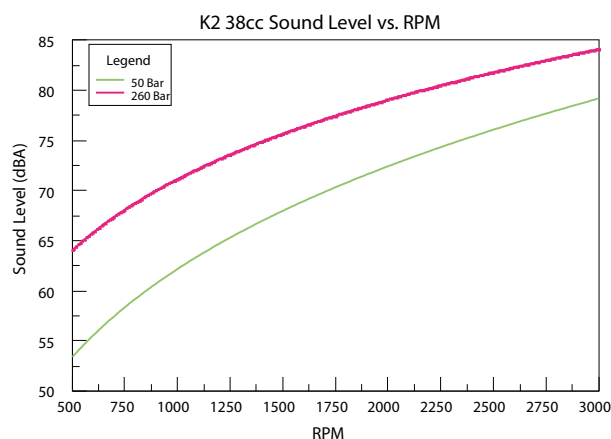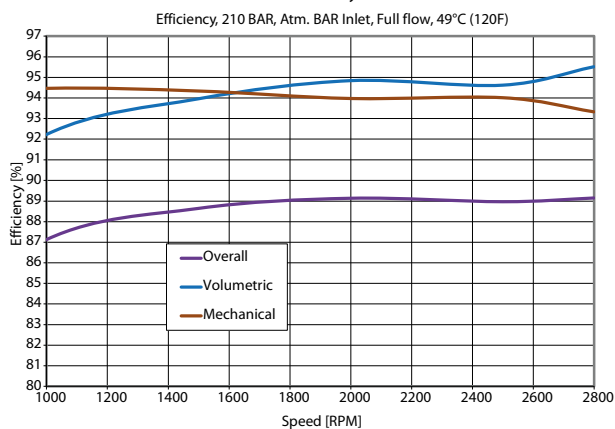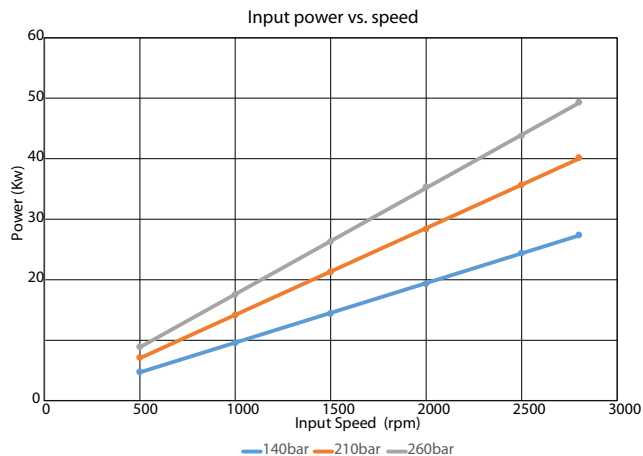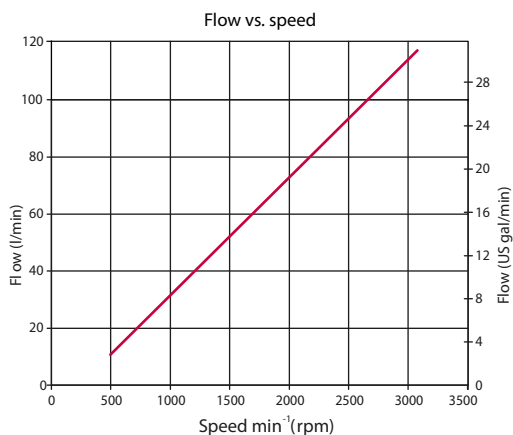

K2 Noise Level – 38cc kit @ 38cc Displacement

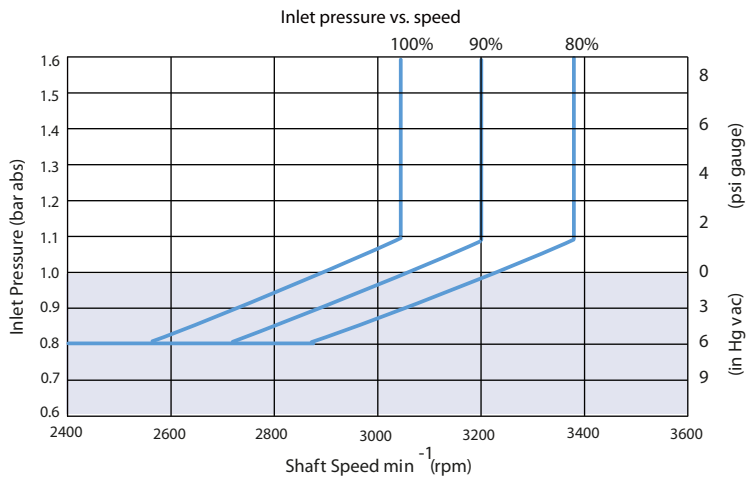


P109105


Frame K2

Performance K2-40C


Flow vs. speed

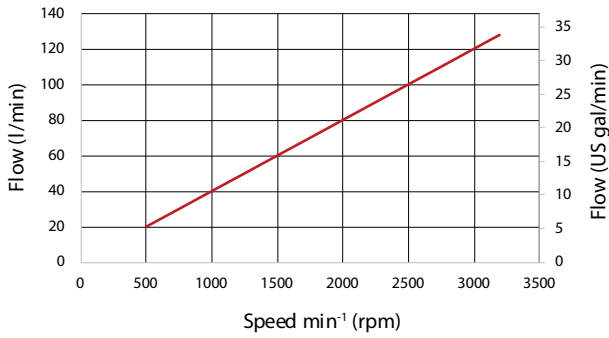


Input power vs. speed

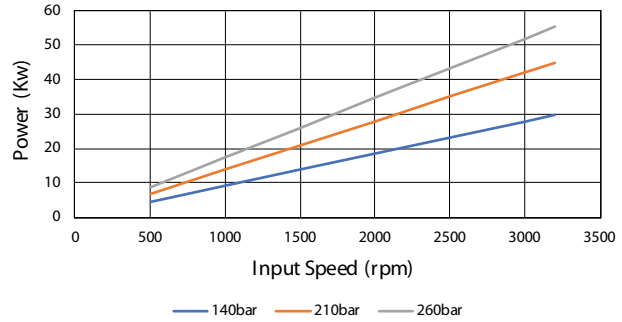

Efficiency, 210 BAR, Atm. BAR Inlet, Full flow, 49° C (120° F)

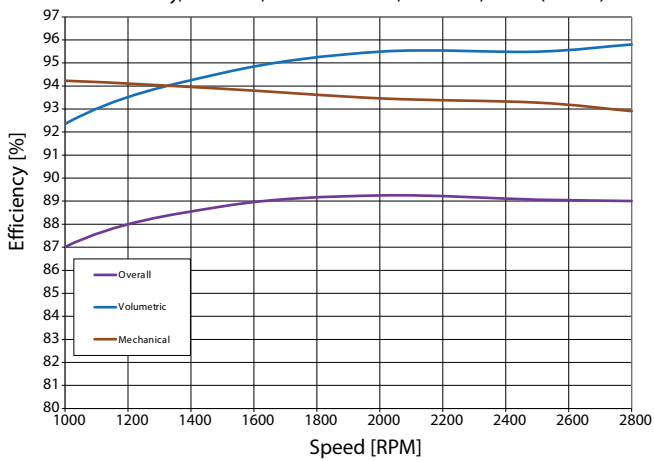





Inlet pressure vs. speed

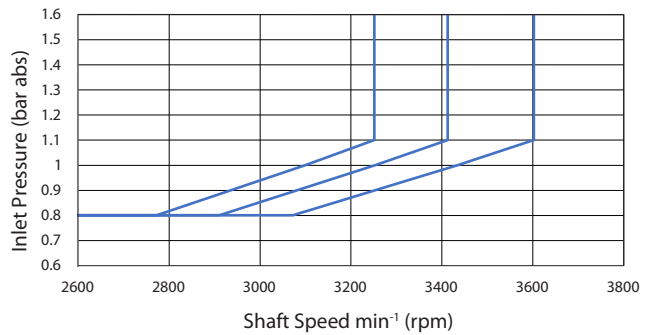


Frame K2

Performance K2-45C

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].

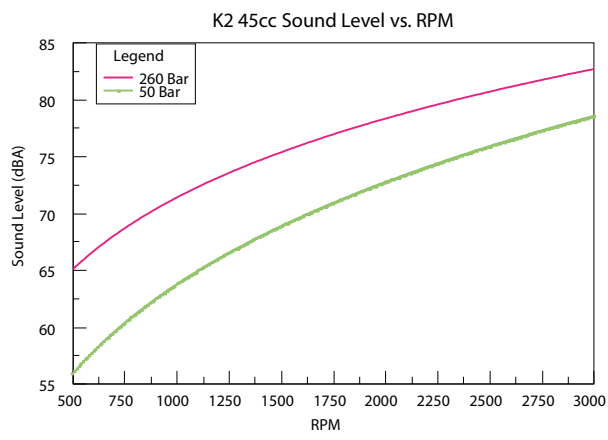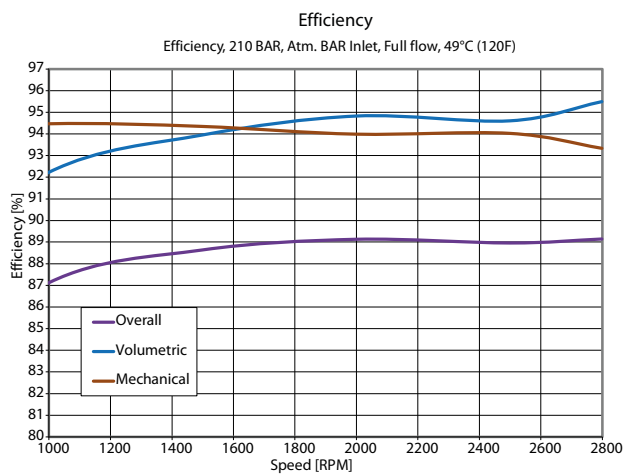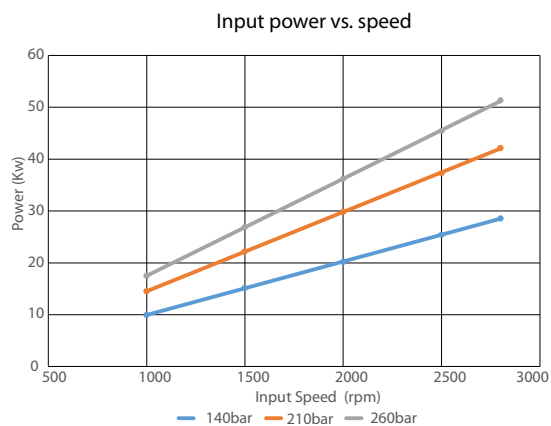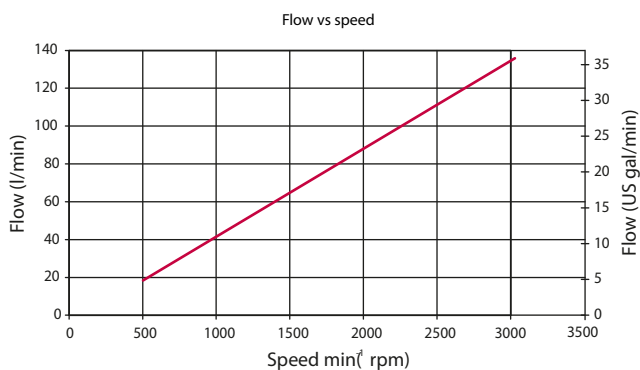

K2 Noise Level – 45cc kit @ 45cc Displacement

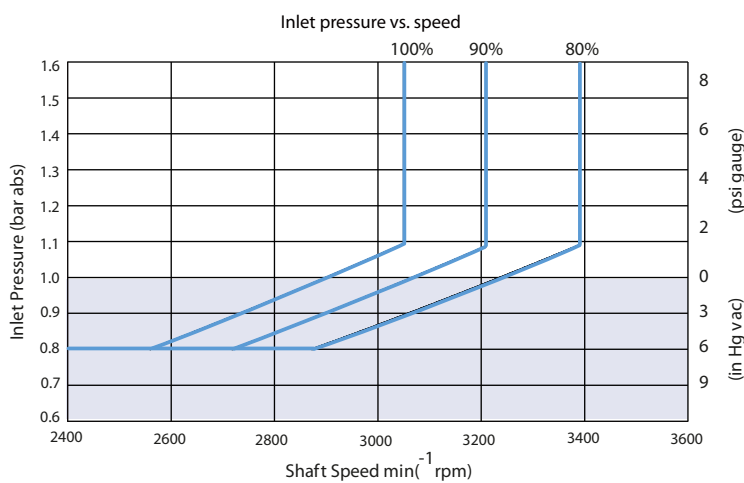

Frame K2

Hydraulic Controls

Pressure Compensated Controls


Response/Recovery Times

| (msec) | Response | Recovery |
|--------|----------|----------|
| 25C | 40 | 172 |
| 30C | 44 | 152 |
| 40C | 49 | 138 |
| 38C | 49 | 138 |
| 45C | 49 | 138 |

PC Setting range

| Model | Bar | Psi |
|-------|---------|-----------|
| 25C | 100-260 | 1450-3771 |
| 30C | | |
| 38C | | |
| 40C | | |
| 45C | | |

Schematic

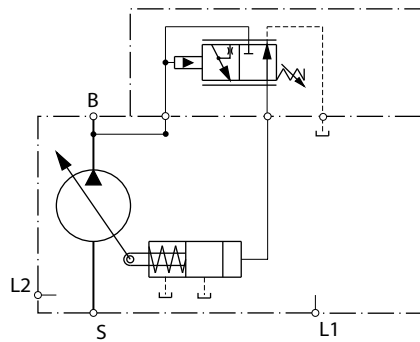

- B** Outlet
- S** Inlet
- L1, L2** Case drain
- X** Remote PC port

Frame K2

Remote Pressure Compensated Controls

Response/Recovery Times

| (msec) | Response | Recovery |
|--------|----------|----------|
| 25C | 40 | 172 |
| 35C | 44 | 152 |
| 38C | 49 | 138 |
| 40C | 49 | 138 |
| 45C | 49 | 138 |


PC Setting Range

| Model | RP |
|-------|-----------------------------|
| 25C | 100-260 bar [1450-3770 psi] |
| 30C | 100-260 bar [1450-3770 psi] |
| 38C | 100-260 bar [1450-3770 psi] |
| 40C | 100-260 bar [1450-3770 bar] |
| 45C | 100-260 bar [1450-3770 bar] |

LS Setting range

| Model | bar | psi |
|-------|-------|---------|
| All | 10-40 | 145-580 |

Schematic

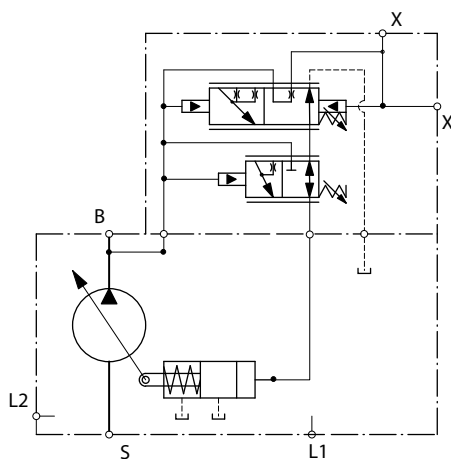

- B** Outlet
- S** Inlet
- L1, L2** Case drain

Frame K2

Load Sensing Pressure Compensated Controls

Response/Recovery Times

| (msec) | Response | Recovery |
|--------|----------|----------|
| 25C | 40 | 172 |
| 30C | 44 | 152 |
| 38C | 49 | 138 |
| 40C | 49 | 138 |
| 45C | 49 | 138 |


PC control setting range

| Code | Bar | psi |
|------|---------|-----------|
| 25C | 100-260 | 1450-3771 |
| 30C | | |
| 38C | | |
| 40C | | |
| 45C | | |

LS setting range

| Model | bar | psi |
|-------|-------|---------|
| All | 10-40 | 145-580 |

Schematic

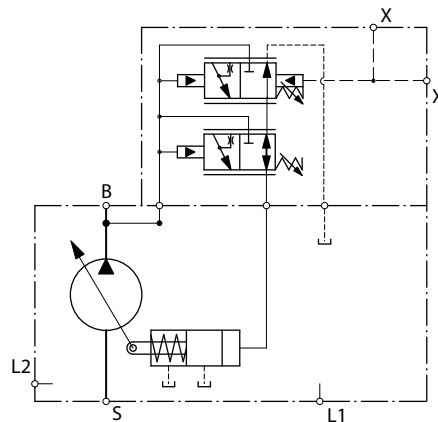

- B** Outlet
- S** Inlet
- L1, L2** Case drain
- X** LS Signal port

Frame K2

Load Sensing Control with Bleed Orifice /Pressure Compensated

Response/Recovery Times

| (msec) | Response | Recovery |
|--------|----------|----------|
| 25C | 40 | 172 |
| 30C | 44 | 152 |
| 38C | 49 | 138 |
| 40C | 49 | 138 |
| 45C | 49 | 138 |


PC control setting range

| Code | Bar | psi |
|------|---------|-----------|
| 25C | 100-260 | 1450-3771 |
| 30C | | |
| 38C | | |
| 40C | | |
| 45C | | |

LS setting range

| Model | bar | psi |
|-------|-------|---------|
| All | 10-40 | 145-580 |

Schematic

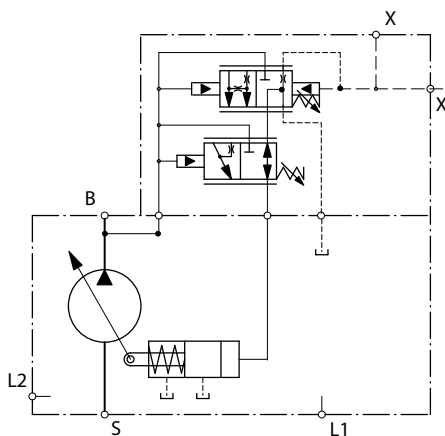


- B** Outlet
- S** Inlet
- L1, L2** Case drain
- X** LS signal port

Frame K2

Electric Controls

Connectors


| Description | Quantity | Ordering Number |
|--------------------------------|----------|-------------------------|
| Mating Connector | 1 | Deutsch® DT06-2S |
| Wedge Lock | 1 | Deutsch® W25 |
| Socket Contact (16 and 18 AWG) | 2 | Deutsch® 0462-201-16141 |
| Danfoss mating connector kit | 1 | K29657 |



P003 480

Continuous Duty Operating Range

Continuous duty operating range

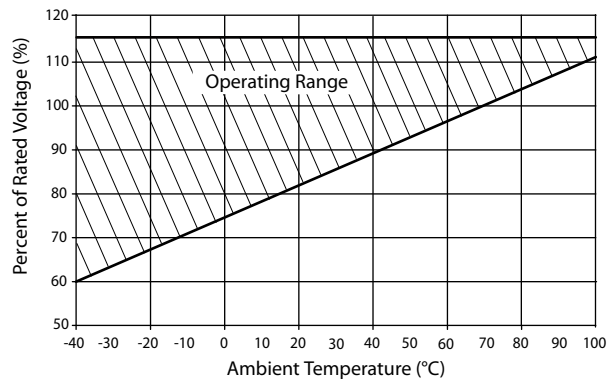

Solenoid Data - Normally Closed

| Voltage | 12V | 24V |
|---|---------|---------|
| Threshold Control [mA] (310/260 bar PC setting, oil temp X) | 200/400 | 100/200 |
| End Current [mA] (20 bar LS setting, oil temp X) | 1200 | 600 |

Solenoid Data - Normally Open

| Voltage | 12V | 24V |
|--|-----------|---------|
| Threshold Control [mA] (20 bar LS setting, oil temp X) | 0 | 0 |
| End Current [mA] (260/310 bar PC setting, oil temp X) | 1000/1100 | 500/550 |

Frame K2


Normally Closed Electric On/Off with Pressure Compensation Controls

| Voltage ¹ | 12V | 24V |
|--|-----------|---------|
| Threshold Control [mA] (20 bar LS setting, oil temp X) | 0 | 0 |
| End Current [mA] (260/310 bar PC setting, oil temp X) | 1000/1100 | 500/550 |

¹ Without servo control orifice

For fan-drive systems, and systems with motors, select an LS setting no less than 15 bar to enhance system stability. As the LS setting is reduced, the risk for system instability may be increased. A 20 bar LS setting is recommended as a starting point for all new applications.

Schematic

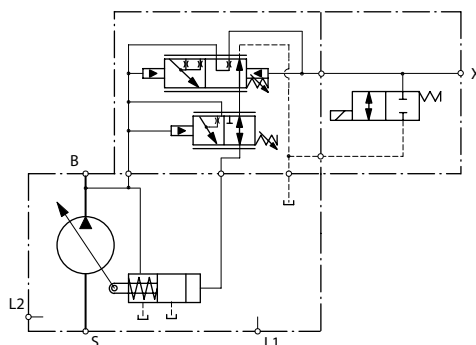

- B** Outlet
- S** Inlet
- L1, L2** Case drain
- X** Load sense port

LS setting range

| Model | bar | psi |
|-------|---------|-------------|
| All | 10 - 40 | [145 - 580] |

PC setting range

| Frame | AR (12V) | CR (24V) |
|-------|-----------------------------|-----------------------------|
| 25C | 100-260 bar [1450-3770] psi | 100-260 bar [1450-3770] psi |
| 30C | | |
| 38C | | |
| 40C | | |
| 45C | | |

Normally Open Electric On/Off with Pressure Compensation Controls

Response/Recovery times

| (msec) | Response ¹ | Recovery |
|--------|-----------------------|----------|
| 25C | 40 | 172 |
| 30C | 44 | 152 |

Frame K2


Response/Recovery times (continued)

| (msec) | Response ¹ | Recovery |
|--------|-----------------------|----------|
| 38C | 49 | 138 |
| 40C | 49 | 138 |
| 45C | 49 | 138 |

¹ Response and recovery times are calculated without servo control orifice

For fan-drive systems, and systems with motors, select an LS setting no less than 15 bar to enhance system stability. As the LS setting is reduced, the risk for system instability may be increased. A 20 bar LS setting is recommended as a starting point for all new applications.

Schematic

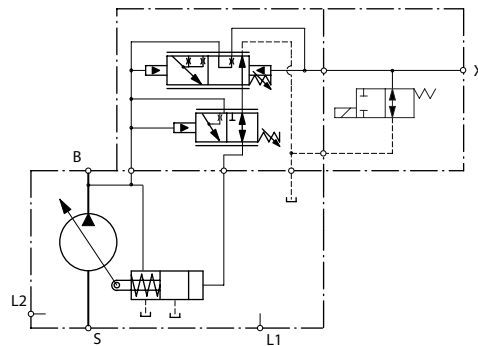

- B** Outlet
- S** Inlet
- L1, L2** Case drain
- X** Load sense port

LS setting range

| Model | bar | psi |
|-------|---------|-------------|
| All | 10 - 40 | [145 - 580] |

PC setting range

| Frame | AN (12V) | CN (24V) |
|-------|--------------------------------|--------------------------------|
| 25C | 100-260 bar [1450-3770] psi | 100-260 bar [1450-3770] psi |
| 30C | | |
| 38C | | |
| 40C | | |
| 45C | | |

Frame K2

Normally Closed Electric Proportional with Pressure Compensation Controls


Response/Recovery times

| (msec) | 0.8mm Orifice | | 1.0mm Orifice | |
|--------|---------------|----------|---------------|----------|
| | Response | Recovery | Response | Recovery |
| 25C | 85 | 518 | 79 | 358 |
| 30C | 85 | 518 | 79 | 358 |
| 38C | 85 | 518 | 79 | 358 |
| 40C | 78 | 490 | 75 | 340 |
| 45C | 78 | 490 | 75 | 340 |

LS setting range

| Model | bar | psi |
|-------|---------|-------------|
| All | 10 - 40 | [145 - 580] |

Schematic

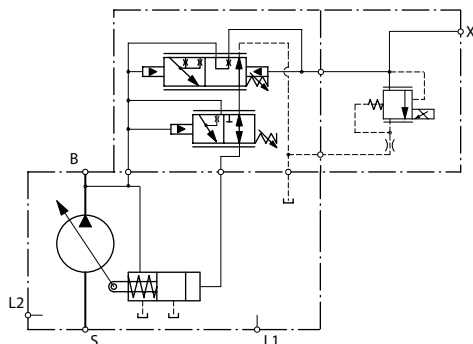

- B** Outlet
- S** Inlet
- L1, L2** Case drain
- X** Load sense port

PC setting range


| Frame | AH (12V) | AL (24V) |
|-------|--------------------------------|--------------------------------|
| 25C | 100-260 bar [1450-3770] psi | 100-260 bar [1450-3770] psi |
| 30C | | |
| 38C | | |
| 40C | | |
| 45C | | |

For fan-drive systems, and systems with motors, select an LS setting no less than 15 bar to enhance system stability. As the LS setting is reduced, the risk for system instability may be increased. A 20 bar LS setting is recommended as a starting point for all new applications.

Electric proportional controls have a unique relationship between margin (LS) setting and low pressure standby. See the graph below for this relationship.

Frame K2

**Frames E, F, J Electric Proportional Control
Low Pressure Standby**

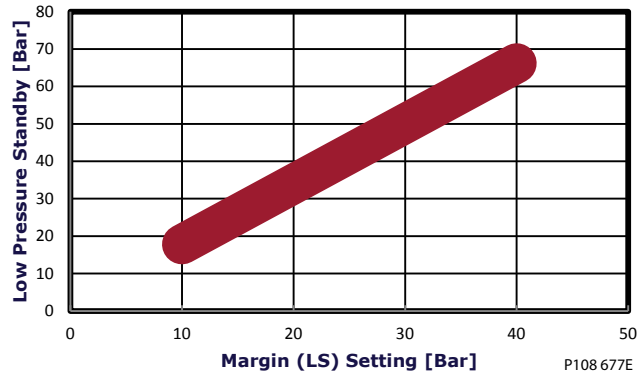

Normally Open Electric Proportional with Pressure Compensation Controls


Response/Recovery times

| (msec) | 0.8mm Orifice | | 1.0mm Orifice | |
|--------|---------------|----------|---------------|----------|
| | Response | Recovery | Response | Recovery |
| 25C | 84 | 521 | 78 | 368 |
| 30C | 84 | 521 | 78 | 368 |
| 38C | 84 | 521 | 78 | 368 |
| 40C | 81 | 498 | 74 | 343 |
| 45C | 81 | 498 | 74 | 343 |

LS setting range

| Model | bar | psi |
|-------|---------|-------------|
| All | 10 - 40 | [145 - 580] |

Schematic

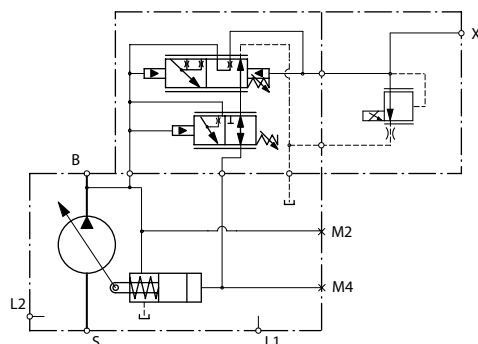

- B** Outlet
- S** Inlet
- L1, L2** Case drain
- X** Load sense port

Frame K2


PC setting range

| Frame | AX (12V) | CL (24V) |
|-------|-----------------------------|-----------------------------|
| 25C | 100-260 bar [1450-3770] psi | 100-260 bar [1450-3770] psi |
| 30C | | |
| 38C | | |
| 40C | | |
| 45C | | |

For fan-drive systems, and systems with motors, select an LS setting no less than 15 bar to enhance system stability. As the LS setting is reduced, the risk for system instability may be increased. A 20 bar LS setting is recommended as a starting point for all new applications.

Electric proportional controls have a unique relationship between margin (LS) setting and low pressure standby. See the graph below for this relationship.

Frames E, F, J, K2 Electric Proportional Control Low Pressure Standby

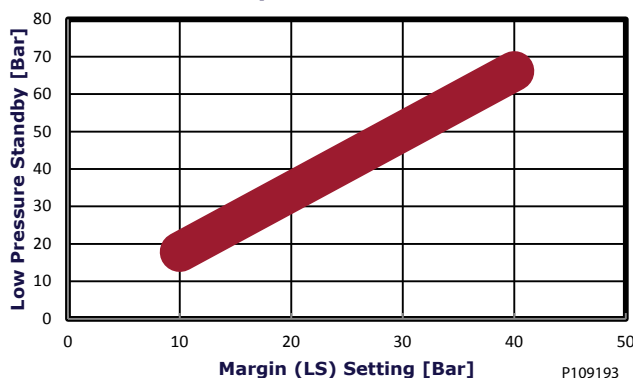


Normally Closed Fan Drive Control

PC setting range

| Frame | SA (12V) | SC (12V) | SB (24V) | SD (24V) |
|-------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| 25C | 100-210 bar [1450-3045] psi | 220-260 bar [3190-3771] psi | 100-210 bar [1450-3045] psi | 220-260 bar [3190-3771] psi |
| 30C | | | | |
| 38C | | | | |
| 40C | | | | |
| 45C | | | | |

Frame K2

Fan Drive Control Schematic

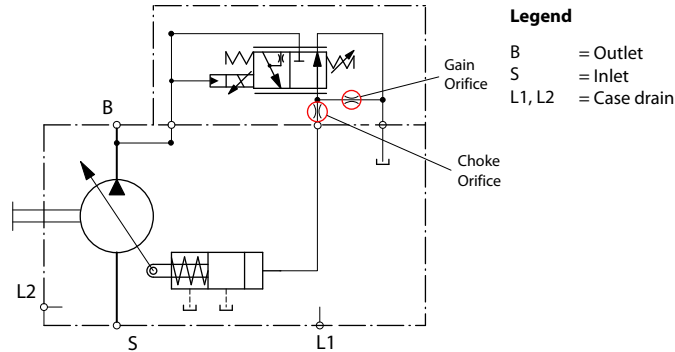

- B** Outlet
- S** Inlet
- L1, L2** Case drain

Input Shafts

| Code | Description | Maximum torque rating ¹ N·m [lbf·in] | Drawing |
|------|--|--|---|
| C2 | 13 tooth spline 16/32 pitch (ANSI B92.1 1970 - Class 6e) | 288 [2546] | <p>13 TOOTH 16/32 PITCH 30° PRESSURE ANGLE 20.638 [0.813] PITCH DIA FILLET ROOT SIDE FIT COMPATIBLE WITH ANSI B92.1-1970 CLASS 6e ALSO MATES WITH FLAT ROOT SIDE FIT</p> <p>Ø18.82 [0.74] MAX</p> <p>Ø21.72 ± 0.09 [0.855 ± 0.004]</p> <p>8 ± 0.475 [0.31 ± 0.02]</p> <p>15.2 ± 0.5 [0.6 ± 0.02]</p> <p>33 [1.3]</p> <p>COUPLING MUST NOT PROTRUDE BEYOND THIS POINT</p> <p>P101993E</p> |
| C3 | 15 tooth spline 16/32 pitch (ANSI B92.1 1970 - Class 6e) | 404 [3575] | <p>15 TOOTH 16/32 PITCH 30° PRESSURE ANGLE 23.813 [0.938] PITCH DIA FILLET ROOT SIDE FIT COMPATIBLE WITH ANSI B92.1-1970 CLASS 6e ALSO MATES WITH FLAT ROOT SIDE FIT</p> <p>Ø21.92 MAX [0.863]</p> <p>Ø25.27 ± 0.12 [0.995 ± 0.005]</p> <p>8 ± 0.475 [0.31 ± 0.02]</p> <p>23.35 ± 0.5 [0.92 ± 0.02]</p> <p>38 [1.5]</p> <p>COUPLING MUST NOT PROTRUDE BEYOND THIS POINT</p> <p>P101994E</p> |

Frame K2


| Code | Description | Maximum torque rating ¹ N·m [lbf·in] | Drawing |
|------|---|--|------------------|
| K1 | Ø 22.23 mm [0.875 in] 33 mm [1.3 in] | 305 [2700] | <p>P101 997E</p> |
| K2 | Ø 22.23 mm [0.875 in] 63 mm [2.48 in] long | 305 [2700] | <p>P101 998E</p> |

1. See [Input shaft torque ratings](#) for an explanation of maximum torque.

Frame K2

Installation Drawings

Axial Ported Endcap

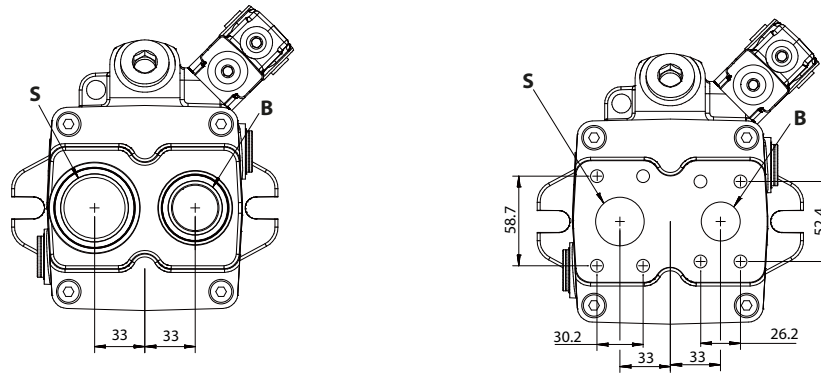


P109081

| Code | Description | Port |
|------|---|---|
| S | System port (inlet), CW rotation shown | O-ring boss per ISO 6149-1, M48x2-6H or M42x2-6H Ø 31.8 (Axial endcaps) or Ø 38.1 (Radial endcaps)- Split flange per ISO 6162-1, M10x1.5-6H 18 full thread depth (Axial) or M12x1.75-6H 22.5 full thread depth (Radial) |
| B | System port (outlet), CW rotation shown | O-ring boss per ISO 6149-1, M33x2-6H or M27x2-6H Ø 25.4 - Split flange per ISO 6162-1, M10x1.5-6H 18 full thread depth |

Frame K2


Axial Ported Endcap O-ring Boss Ports Installation Dimensions

K2 with axial endcap and LS control

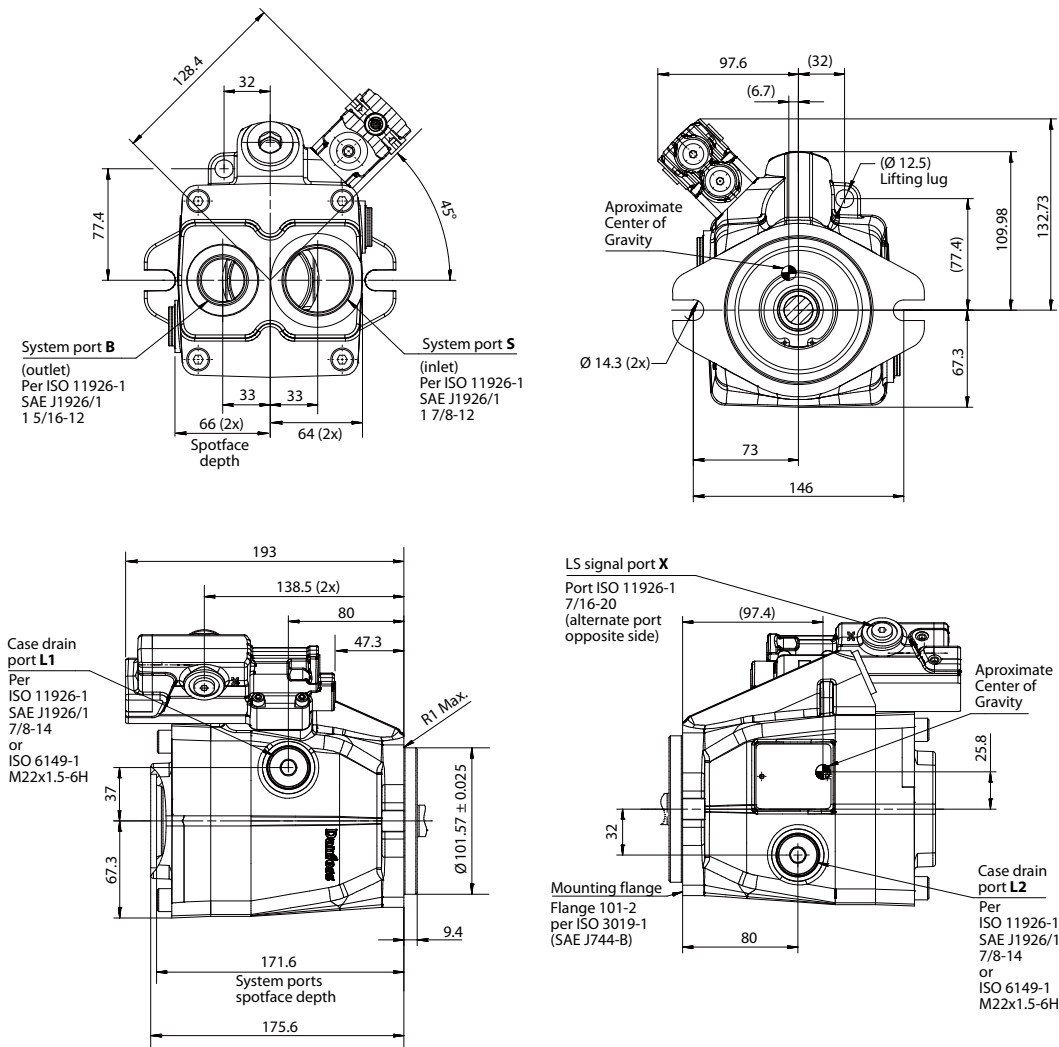


Frame K2

K2 split flange axial endcap and LS control

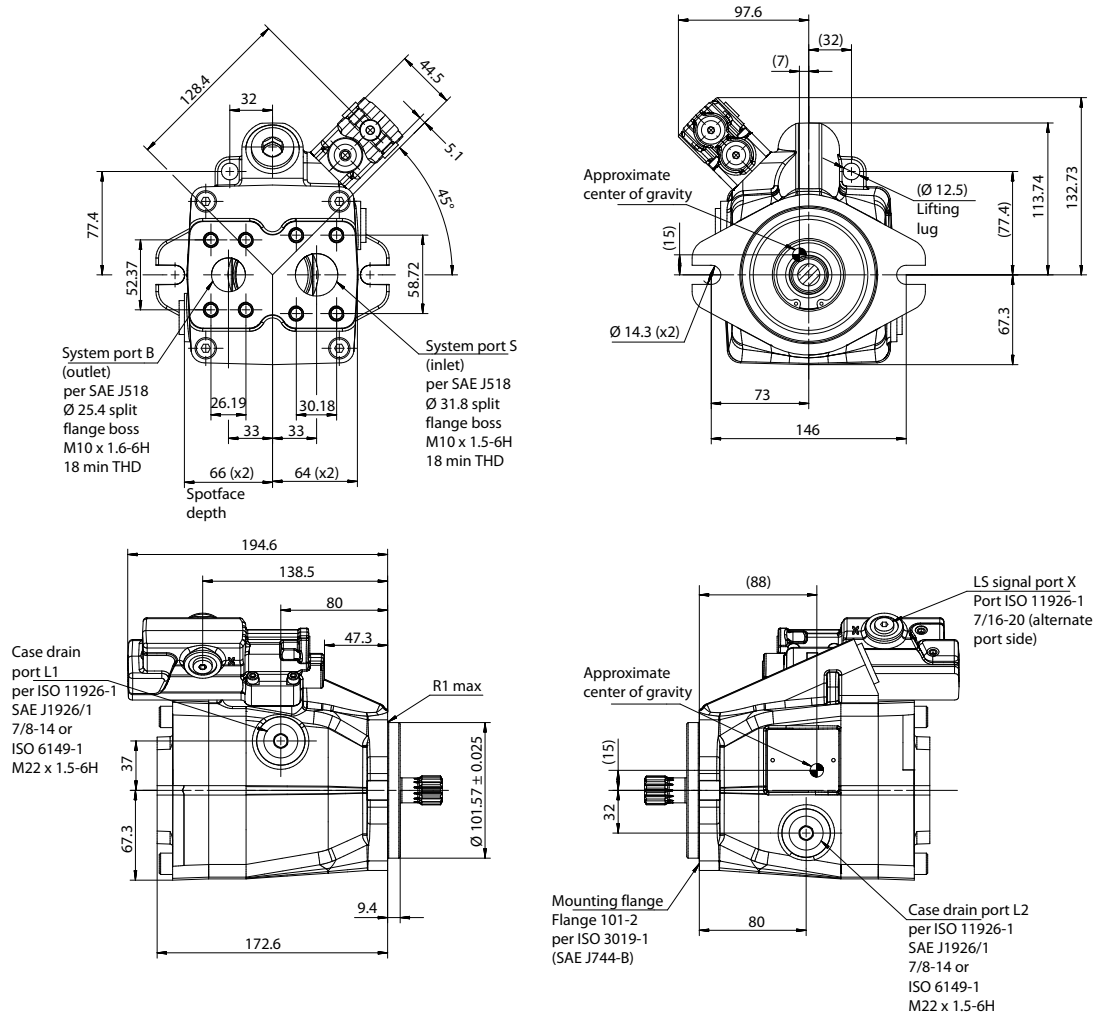


Radial Ported Endcap Split Flange Ports

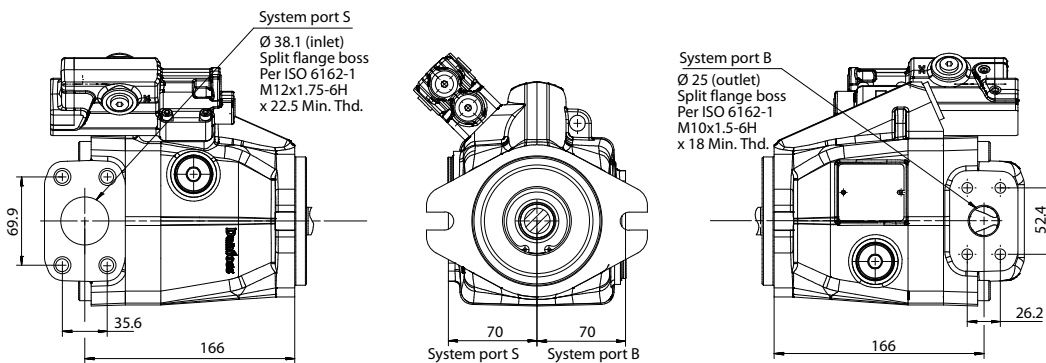

Radial endcap - CCW rotation

Frame K2

Radial Ported Endcap O-ring Boss Ports

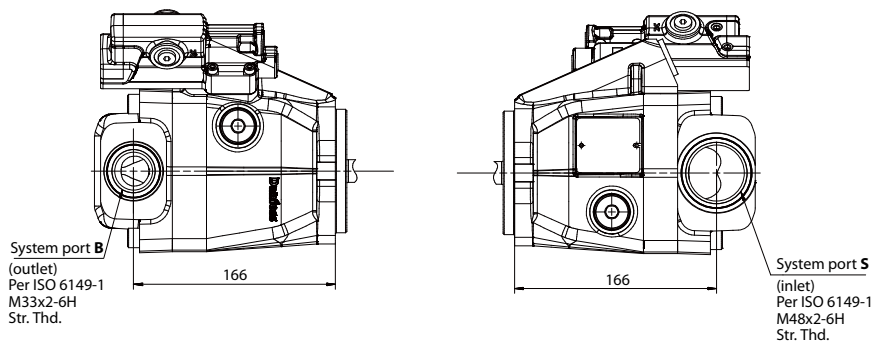


Radial endcap - CW rotation





P109088

Frame K2

Radial Ported Endcap Installation Dimensions

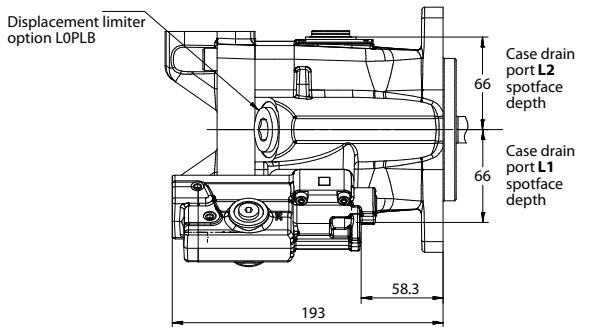

Pump with radial endcap - non through drive

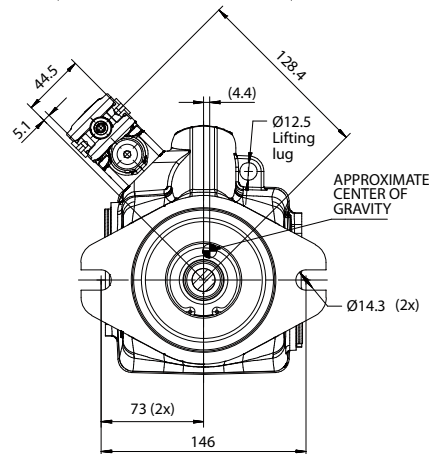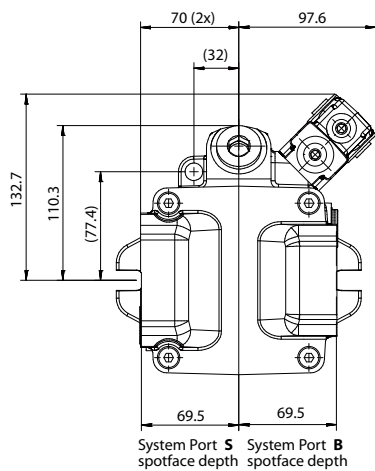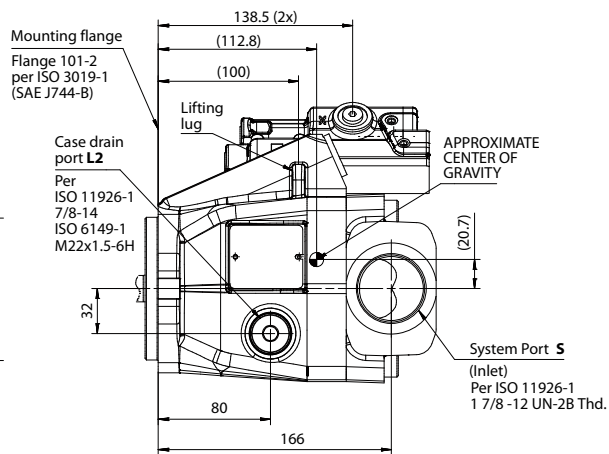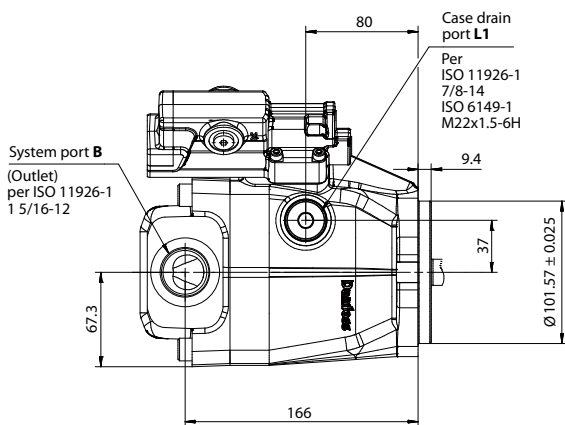

CW rotation with O-ring boss ports


P109094

Front Mounting Flange - SAE-B two bolt

Frame K2

Auxiliary Mounting Pads


SAE-A auxiliary mounting pad

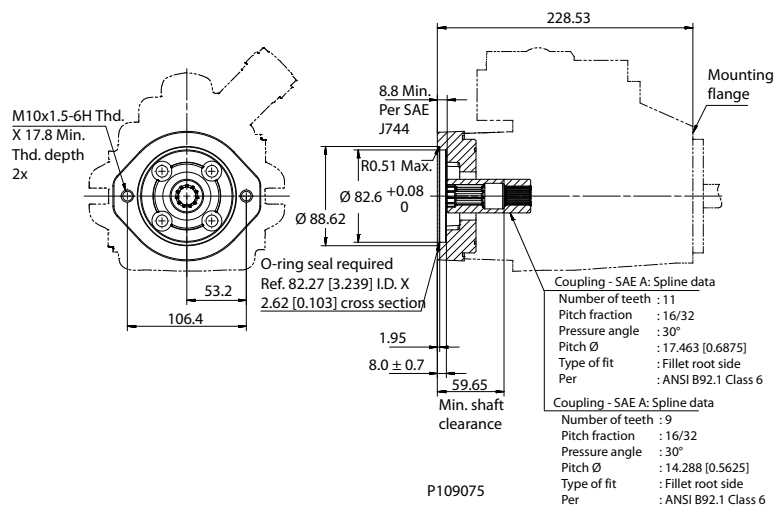

Specifications

| Coupling | 9-tooth | 11-tooth |
|---------------------------|----------------------|-----------------------|
| Spline minimum engagement | 12.6 mm [0.50 in] | 13.5 mm [0.53 in] |
| Maximum torque | 107 N•m [950 lbf•in] | 147 N•m [1300 lbf•in] |

SAE-B auxiliary mounting pad

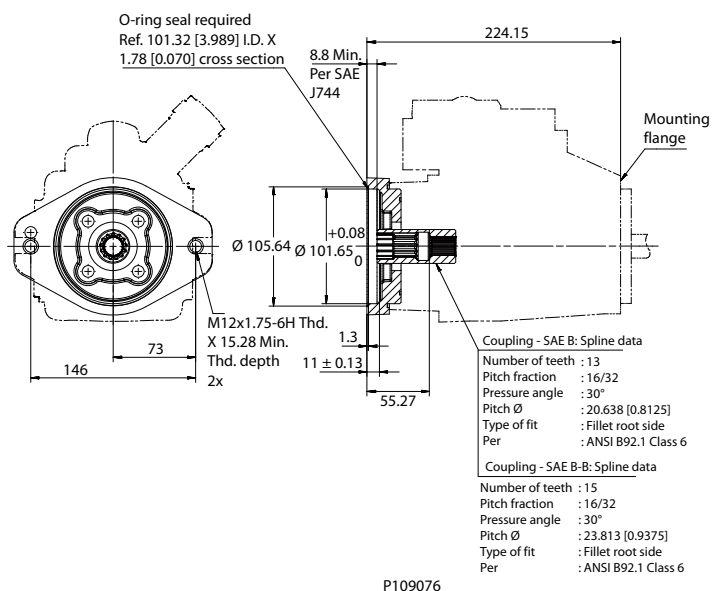


Frame K2


Specifications

| | | |
|---------------------------|-----------------------|-----------------------|
| Coupling | 13-tooth | 15-tooth |
| Spline minimum engagement | 13.2 mm [0.52 in] | 16.1 mm [0.63 in] |
| Maximum torque | 171 N•m [1512 lbf•in] | 171 N•m [1512 lbf•in] |

SAE-A Fixed flange

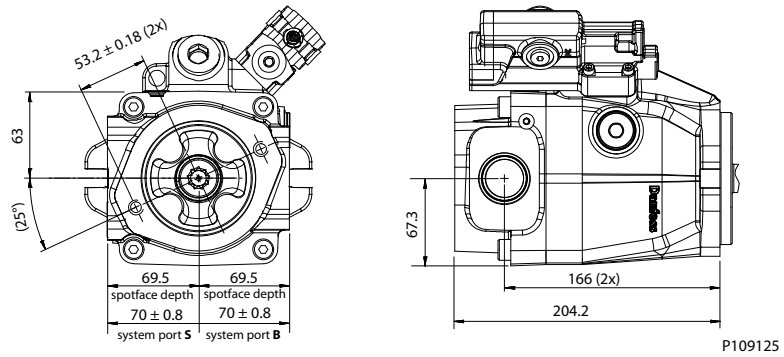


Auxiliary Mounting Pad - Running Cover

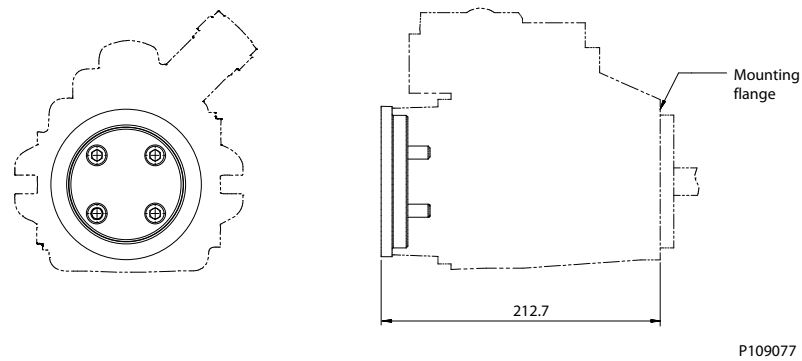

Frame K2


Electric solenoid, left side

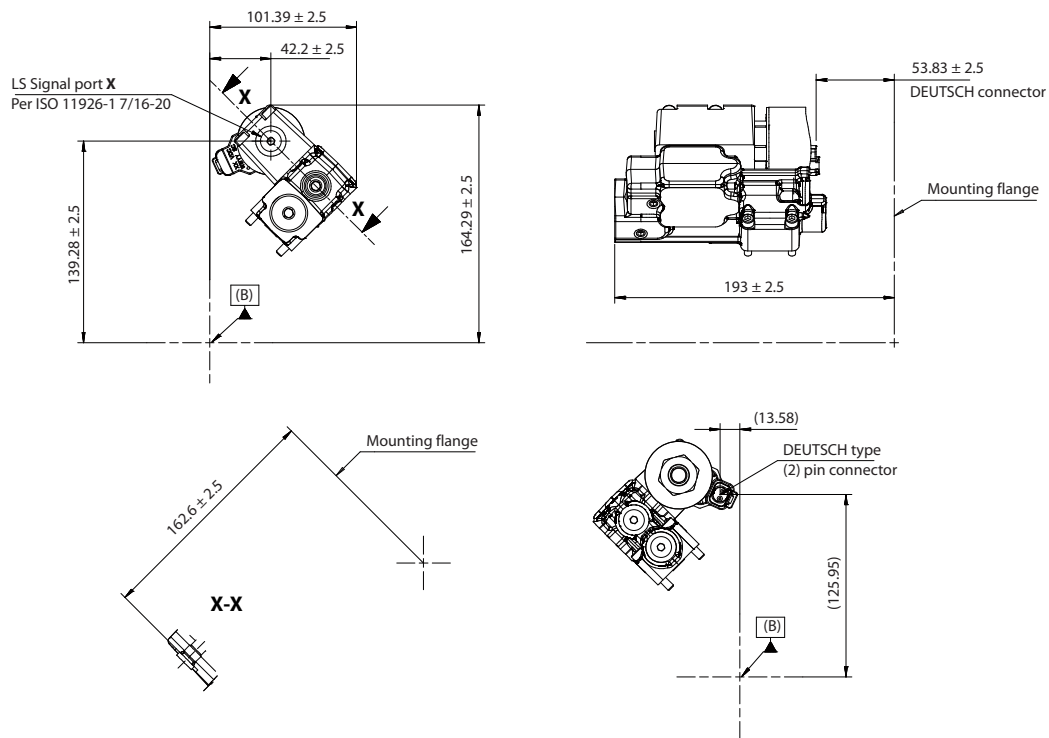

Single spool control, Left side

P109096

Fan drive control

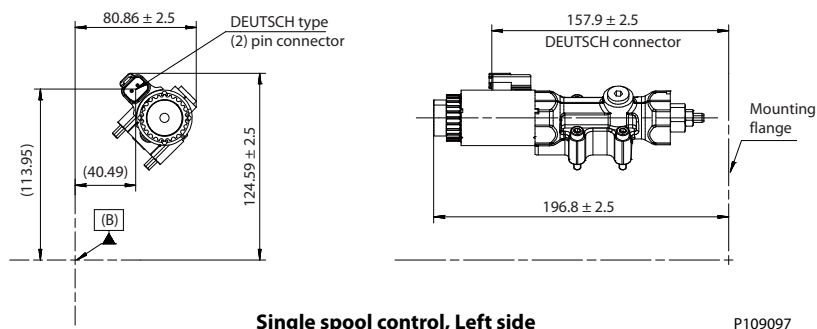

Single spool control, Left side


P109097

Displacement Limiter

K2 Frame open circuit pumps are available with an optional adjustable displacement limiter. This adjustable stop limits the pump's maximum displacement.

Frame K2

Cross-Section

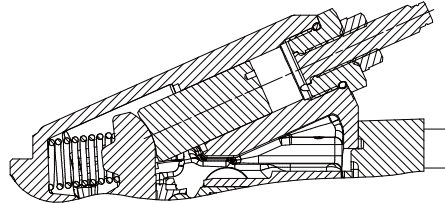

P109150


Setting range

| | |
|--------|--|
| K2-25C | 0 to 25 cm ³ [0 to 1.53 in ³] |
| K2-30C | 0 to 30 cm ³ [0 to 1.83 in ³] |
| K2-38C | 0 to 38 cm ³ [0 to 2.32 in ³] |
| K2-45C | 0 to 45 cm ³ [0 to 2.75 in ³] |

Displacement per turn

| | |
|--------|---|
| K2-25C | 3.86 cm ³ /rev [0.24 in ³ /rev] |
| K2-30D | 3.86 cm ³ /rev [0.24 in ³ /rev] |
| K2-38C | 3.86 cm ³ /rev [0.24 in ³ /rev] |
| K2-45D | 4.64 cm ³ /rev [0.28 in ³ /rev] |

Installation Dimensions

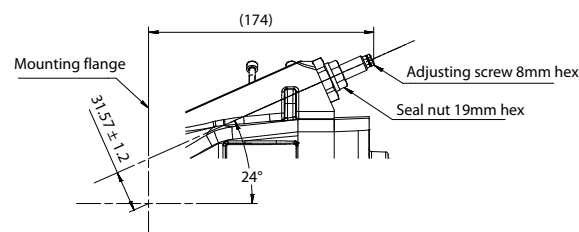

Displacement Limiter Option **LOAAA**

P109080


Frames L and K

Design

Series 45 Frame L and K pumps have a single servo piston design with a cradle-type swashplate set in polymer-coated journal bearings. A bias spring and internal forces increase swashplate angle. The servo piston decreases swashplate angle. Nine reciprocating pistons displace fluid from the pump inlet to the pump outlet as the cylinder block rotates on the pump input shaft. The block spring holds the piston slippers to the swashplate via the slipper retainer. The cylinder block rides on a bi-metal valve plate optimized for high volumetric efficiency and low noise. Tapered roller bearings support the input shaft and a viton lip-seal protects against shaft leaks.

An adjustable one spool (PC only, not shown) or two spool (LS and remote PC) control senses system pressure and load pressure (LS controls). The control ports system pressure to the servo piston, adjusting swashplate angle to control pump output flow.

Frame K/L cross section

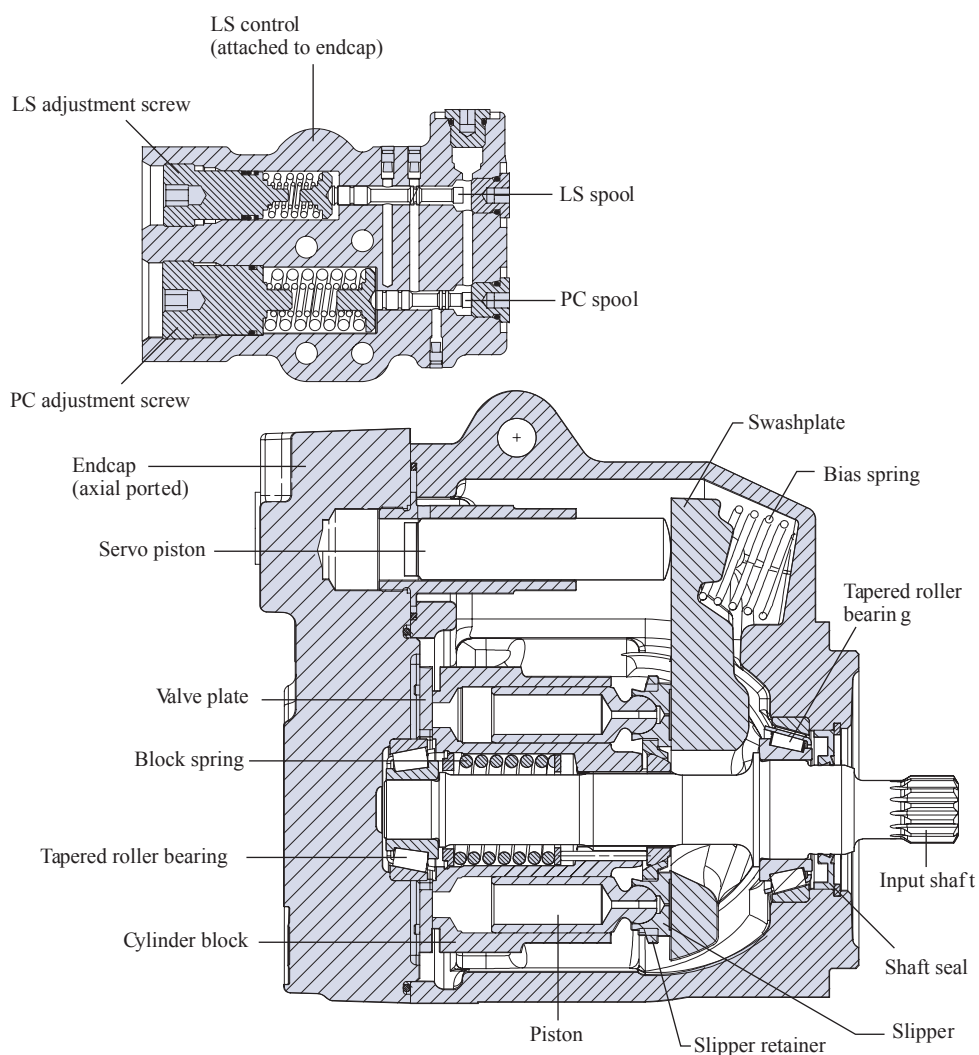

P101 659E

Frames L and K

Technical Specifications

| | | | L Frame | | K Frame | |
|---|-----------------------------|--|----------------------|----------------------|----------------------|----------------------|
| | | Unit | L25C | L30D | K38C | K45D |
| Maximum Displacement | | cm ³ [in ³] | 25 [1.53] | 30 [1.83] | 38 [2.32] | 45 [2.75] |
| Working Input Speed | Minimum | min -1 (rpm) | 500 | 500 | 500 | 500 |
| | Continuous | | 3200 | 3200 | 2650 | 2650 |
| | Maximum | | 3600 | 3600 | 2800 | 2800 |
| Working Pressure | Continuous | bar [psi] | 260 [3770] | 210 [3045] | 260 [3770] | 210 [3045] |
| | Maximum | | 350 [5075] | 300 [4350] | 350 [5075] | 300 [4350] |
| Flow at rated speed (theoretical) | | l/min [US gal/min] | 80 [21] | 96 [25.4] | 100.7 [26.6] | 119.3 [31.5] |
| Input torque at maximum displacement (theoretical) at 49° C [120°F] | | N·m/bar [lbf·in/1000 psi] | 0.398 [243] | 0.477 [291] | 0.605 [369] | 0.716 [438] |
| Mass moment of inertia of internal rotating components | | kg·m ² [slug·ft ²] | 0.00169 [0.00125] | 0.00161 [0.00119] | 0.00184 [0.00135] | 0.00203 [0.00150] |
| Weight - Axial ports | | kg [lb] | 19.0 [41.9] | | | |
| Weight - Radial ports | | | 24.0 [52.9] | | | |
| External Shaft Loads | External moment (Me) | N·m [lbf·in] | 61 [540] | 61 [540] | 76 [673] | 76 [673] |
| | Thrust in (Tin), out (Tout) | N [lbf] | 1000 [225] | 1000 [225] | 1200 [270] | 1200 [270] |
| Mounting flange load moments | Vibratory (continuous) | N·m [lbf·in] | 1005 [8895] | | | |
| | Shock (maximum) | | 3550 [31420] | | | |

Order code

Code description

| Code | Description |
|------|--|
| R | Product Frame, Variable Open Circuit Pump |
| S | Rotation |
| P | Displacement |
| C | Control Type |
| D | Pressure Compensator Setting |
| E | Load Sense Setting |
| F | Not Used |
| G | Choke Orifice |
| H | Gain Orifice |
| J | Input Shaft/Auxiliary Mount/Endcap |
| K | Shaft Seal/Front Mounting Flange/Housing Ports |
| L | Displacement Limiter |
| M | Special Hardware |
| N | Special Features |

Frames L and K

R Frame

| | | L Frame | | K Frame | |
|----|--|---------|------|---------|------|
| | | 025C | 030D | 038C | 045D |
| KR | K Frame, variable displacement open circuit pump | | | • | • |
| LR | L Frame, variable displacement open circuit pump | • | • | | |

S Rotation

| | | L Frame | | K Frame | |
|---|------------------------------|---------|------|---------|------|
| | | 025C | 030D | 038C | 045D |
| L | Left Hand (counterclockwise) | • | • | • | • |
| R | Right Hand (clockwise) | • | • | • | • |

P Displacement

| | | | | | |
|------|--|---|---|---|---|
| 025C | 025 cm ³ /rev [1.53 in ³ /rev] | • | | | |
| 030D | 030 cm ³ /rev [1.83 in ³ /rev] | | • | | |
| 038C | 038 cm ³ /rev [2.32 in ³ /rev] | | | • | |
| 045D | 045 cm ³ /rev [2.75 in ³ /rev] | | | | • |

C Control type

| | | L Frame | | K Frame | |
|----|---|---------|------|---------|------|
| | | 025C | 030D | 038C | 045D |
| PC | Pressure Compensator | • | • | • | • |
| RP | Remote Pressure Compensator | • | • | • | • |
| LB | Load Sensing/Pressure Comp. w/Bleed Orifice | • | • | • | • |
| LS | Load Sensing/Pressure Compensator | • | • | • | • |
| EA | Electric On/Off w/Pressure Comp. (NO, 12VDC) | • | • | • | • |
| EG | Electric On/Off w/Pressure Comp. (NO, 24VDC) | • | • | • | • |
| EB | Electric On/Off w/Pressure Comp. (NC, 12VDC) | • | • | • | • |
| EE | Electric On/Off w/Pressure Comp. (NC, 24VDC) | • | • | • | • |
| EK | Electric Proportional Pressure Control w/ Pressure Comp. (NO,12VDC) | • | • | • | • |
| EL | Electric Proportional Pressure Control w/ Pressure Comp. (NO,24VDC) | • | • | • | • |
| EM | Electric Proportional Pressure Control w/ Pressure Comp. (NC,12VDC) | • | • | • | • |
| EN | Electric Proportional Pressure Control w/ Pressure Comp. (NC,24VDC) | • | • | • | • |

D PC setting (2 digit code, 10 bar increments)

| | | | | | |
|---------|-----------------------------------|---|---|---|---|
| Example | 25 = 250 bar (3625 psi) | | | | |
| 10–21 | 100 to 210 bar [1450 to 3045 psi] | • | • | • | • |
| 22–26 | 220 to 260 bar [3190 to 3771 psi] | • | | • | |

Frames L and K

E Load sensing setting (2 digit code, 1 bar increments)

| | | | | | |
|---------|---|---|---|---|---|
| Example | 20 = 20 bar (290 psi) | | | | |
| 12-36 | 12 to 36 bar [174 to 522 psi] | • | • | • | • |
| NN | Not applicable (pressure compensated only controls) | • | • | • | • |

F Not used

| | | L Frame | | K Frame | |
|----|----------------|---------|------|---------|------|
| | | 025C | 030D | 038C | 045D |
| NN | Not applicable | • | • | • | • |

G Servo Control Orifice

| | | | | | |
|---|---|---|---|---|---|
| N | None (standard) | • | • | • | • |
| E | 0.8 mm diameter - Electrical proportional controls only | • | • | • | • |
| F | 1.0 mm diameter - Electrical proportional controls only | • | • | • | • |
| J | 0.8 mm diameter - All other controls | • | • | • | • |
| K | 1.0 mm diameter - All other controls | • | • | • | • |

H Gain Orifice

| | | | | | |
|---|-----------------|---|---|---|---|
| 3 | 1.0 mm diameter | • | • | • | • |
|---|-----------------|---|---|---|---|

J Input Shaft

| | |
|----|----------------------------------|
| C2 | 13 tooth, 16/32 pitch |
| C3 | 15 tooth, 16/32 pitch |
| K1 | 0.875 inch straight keyed |
| K2 | 0.875 inch straight keyed (long) |
| T1 | 1.0 inch Taper |

Auxiliary Mount/Endcap Style

| Auxiliary Description | Endcap Style | Inlet Porting | Outlet Porting | Endcap Description | Code |
|-----------------------|--------------|---------------|----------------|--|------|
| None | Axial | O-Ring Boss | O-Ring Boss | Inlet - SAE O-Ring boss port (1.875 inch threads) Outlet - SAE O-Ring boss port (1.3125 inch threads) Control - Left Side | NF |
| None | Axial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (1.25 inch port 0.4375 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) Control - Left Side | NM |
| None | Axial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (1.25 inch port M10 threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port M10 threads) Control - Left Side | NP |

Frames L and K

Auxiliary Mount/Endcap Style (continued)

| | | | | | |
|-----------------|--------|--------------|--------------|---|----|
| None | Radial | O-Ring Boss | O-Ring Boss | Inlet - SAE O-Ring boss port (1.875 inch threads) Outlet - SAE O-Ring boss port (1.3125 inch threads) Control - Right Side | NG |
| None | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (1.5 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) Control - Right Side | NK |
| None | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (1.5 inch port M12 threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port M10 threads) Control - Right Side | NR |
| Running Cover | Radial | O-Ring Boss | O-Ring Boss | Inlet - SAE O-Ring boss port (1.875 inch threads) Outlet - SAE O-Ring boss port (1.3125 inch threads) Control - Right Side | RG |
| Running Cover | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (1.5 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) Control - Right Side | RK |
| SAE-A, 11 teeth | Radial | O-Ring Boss | O-Ring Boss | Inlet - SAE O-Ring boss port (1.875 inch threads) Outlet - SAE O-Ring boss port (1.3125 inch threads) Control - Right Side | TG |
| SAE-A, 9 teeth | Radial | O-Ring Boss | O-Ring Boss | Inlet - SAE O-Ring boss port (1.875 inch threads) Outlet - SAE O-Ring boss port (1.3125 inch threads) Control - Right Side | AG |
| SAE-A, 9 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (1.5 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) Control - Right Side | AK |
| SAE-B, 13 teeth | Radial | O-Ring Boss | O-Ring Boss | Inlet - SAE O-Ring boss port (1.875 inch threads) Outlet - SAE O-Ring boss port (1.3125 inch threads) Control - Right Side | BG |
| SAE-B, 13 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (1.5 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) Control - Right Side | BK |
| SAE-B, 13 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (1.5 inch port M12 threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port M10 threads) Control - Right Side | BR |

Frames L and K

Auxiliary Mount/Endcap Style (continued)

| | | | | | |
|------------------|--------|--------------|--------------|---|----|
| SAE-BB, 15 teeth | Radial | O-Ring Boss | O-Ring Boss | Inlet - SAE O-Ring boss port (1.875 inch threads) Outlet - SAE O-Ring boss port (1.3125 inch threads) Control - Right Side | VG |
| SAE-BB, 15 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (1.5 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) Control - Right Side | VK |

J Input Shaft/Auxiliary Mount/Endcap

Available Combinations

| | L Frame | | K Frame | |
|--------|---------|------|---------|------|
| | 025C | 030D | 038C | 045D |
| C2AG* | • | • | • | • |
| C2BG* | • | • | • | • |
| C2BK* | • | • | • | • |
| C2NF* | • | • | • | • |
| C2NG** | • | • | • | • |
| C2NK** | • | • | • | • |
| C2NM** | | | • | • |
| C2NP** | | | • | • |
| C2NR* | | | • | • |
| C2RG* | • | • | • | • |
| C2TG* | • | • | • | • |
| C3AG* | • | • | • | • |
| C3AK** | | | • | • |
| C3BG* | • | • | • | • |
| C3NF* | • | • | • | • |
| C3NG** | • | • | • | • |
| C3NK** | | | • | • |
| C3RG* | • | • | • | • |

* PLB or AAA Displacement limiter options only

** KNB Displacement limiter options only

| | L Frame | | K Frame | |
|--------|---------|------|---------|------|
| | 025C | 030D | 038C | 045D |
| C3TG* | • | • | • | • |
| C3VG* | | | • | • |
| K1AG* | • | • | | |
| K1NF* | • | • | • | • |
| K1NG** | • | • | • | • |
| K1RG* | • | • | | |
| K2AG* | • | • | • | • |
| K2BG* | • | • | • | • |

Frames L and K

| | L Frame | | K Frame | |
|--------|---------|------|---------|------|
| | 025C | 030D | 038C | 045D |
| K2NF* | • | • | • | • |
| K2NG** | • | • | • | • |
| K2NM** | | | • | • |
| K2RG* | • | • | • | • |
| T1BG* | | | • | • |
| T1NF* | • | • | • | • |
| T1NG** | • | • | • | • |
| T1RG* | • | • | • | • |

K Shaft seal

| | | L Frame | | K Frame | |
|---|----------------|---------|------|---------|------|
| | | 025C | 030D | 038C | 045D |
| A | Single (Viton) | • | • | • | • |

K Mounting flange and housing port style

| | | L Frame | | K Frame | |
|---|---|---------|------|---------|------|
| | | 025C | 030D | 038C | 045D |
| 6 | SAE-B Flange 2-bolt/SAE O-ring boss ports | • | • | • | • |

K Not used

| | | | | | |
|---|----------------|---|---|---|---|
| N | Not applicable | • | • | • | • |
|---|----------------|---|---|---|---|

L Displacement limiter

| | | | | | |
|-----|--------------------------------------|---|---|---|---|
| AAA | Adjustable, factory set at max angle | • | • | • | • |
| KNB | None | • | • | • | • |
| PLB | None (plugged) | • | • | • | • |

M Special hardware

| | | | | | |
|-----|------|---|---|---|---|
| NNN | None | • | • | • | • |
|-----|------|---|---|---|---|

N Special features


| | | | | | |
|-----|------|---|---|---|---|
| NNN | None | • | • | • | • |
|-----|------|---|---|---|---|

Frames L and K


Performance L25C

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].


Flow vs. speed

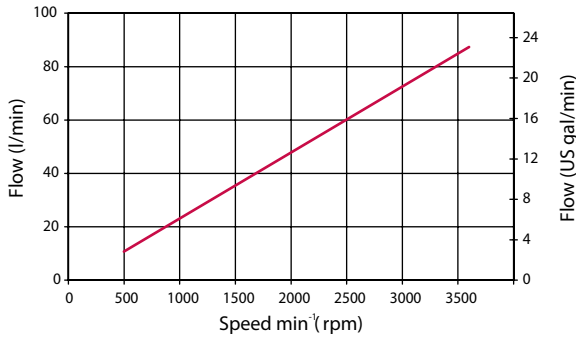


Input power vs. speed

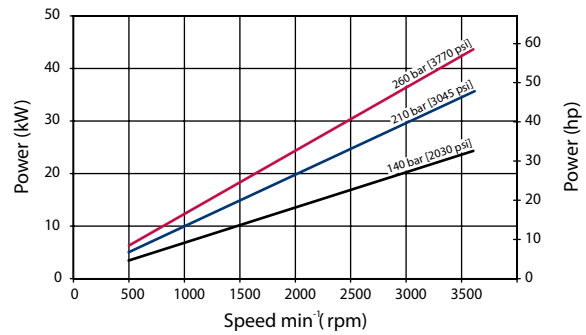


Efficiency

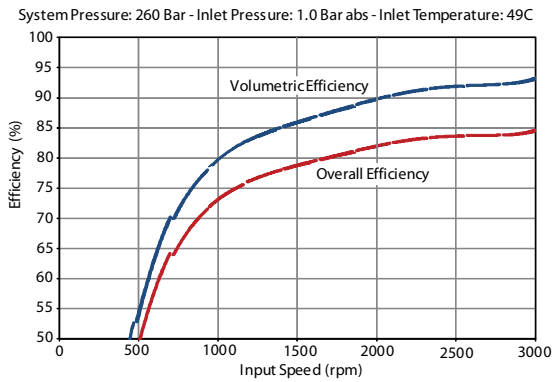

Noise

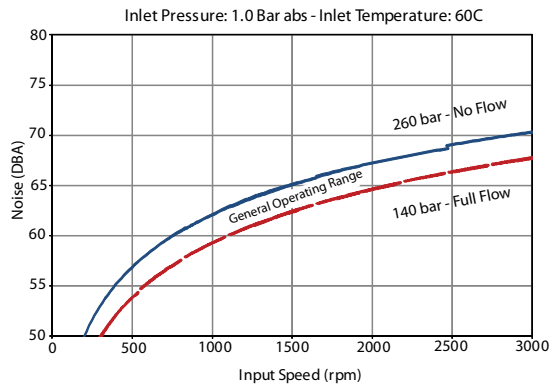

Inlet pressure vs. speed




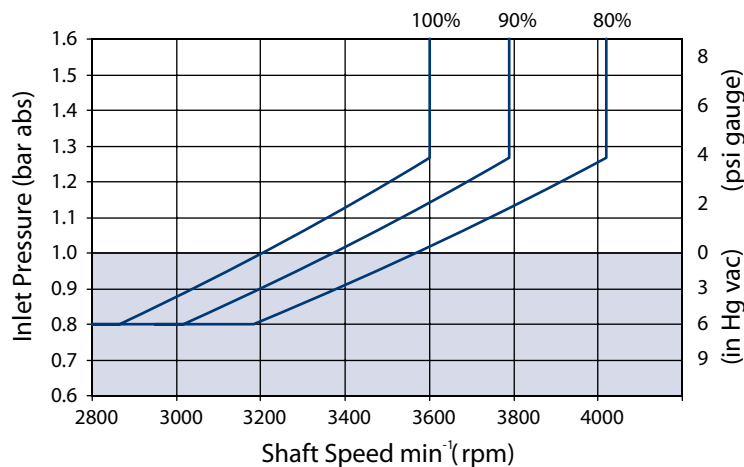


The chart above shows allowable inlet pressure and speed at various displacements. Greater speeds and lower inlet pressures are possible at reduced displacement. Operating outside of acceptable limits reduces pump life.

Frames L and K

Performance L30D

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].

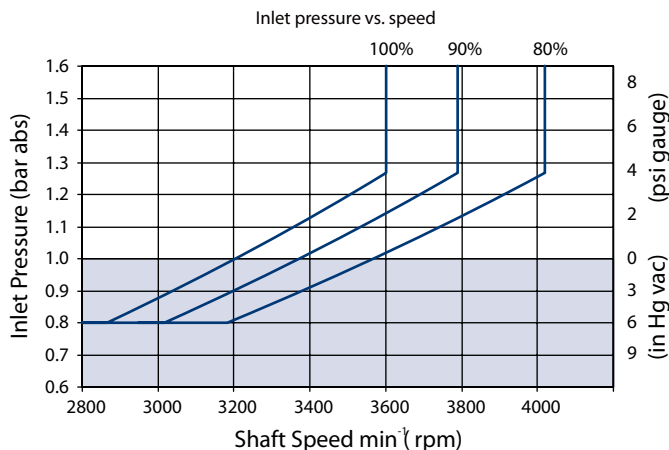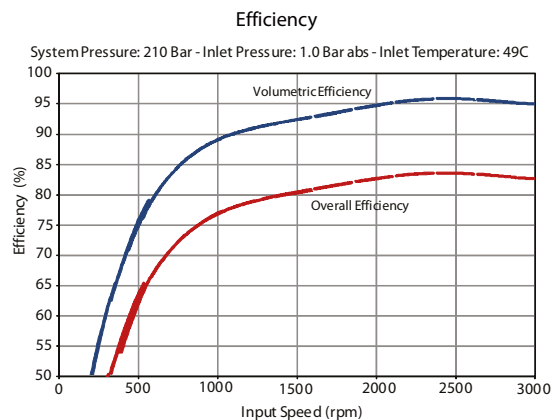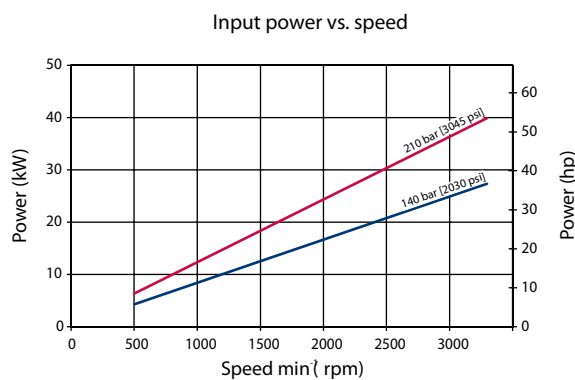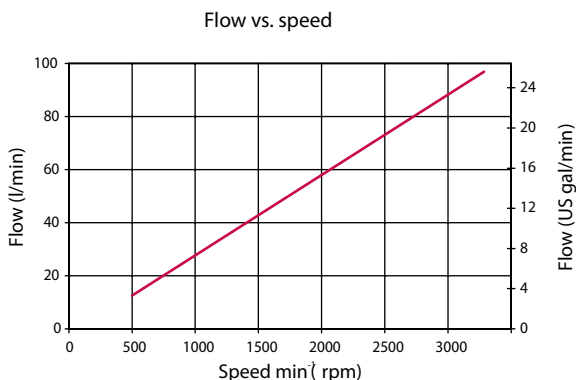

The *Efficiency* chart shows allowable inlet pressure and speed at various displacements. Greater speeds and lower inlet pressures are possible at reduced displacement. Operating outside of acceptable limits reduces pump life.

Noise


| dB(A) | 210 bar [3045 psi] | |
|-------|------------------------------|-------------|
| | 1800 min ⁻¹ (rpm) | Rated Speed |
| L30D | 66 | 70 |

Frames L and K


Performance K38C

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].


Flow vs. speed

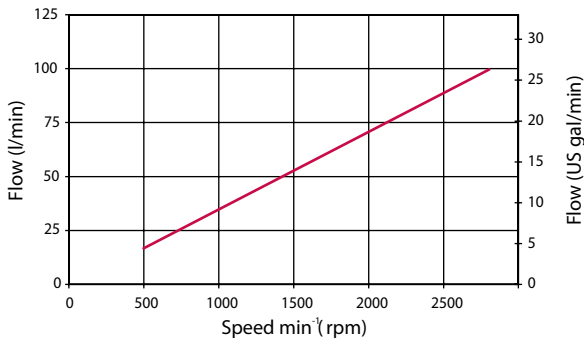


Input power vs. speed

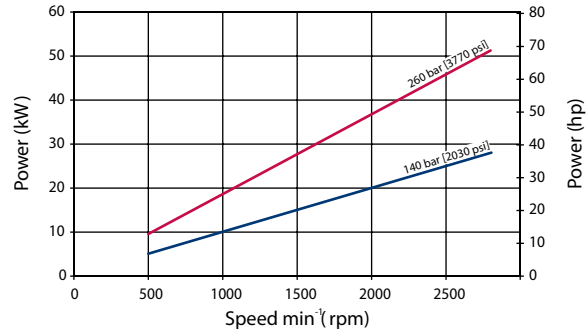


Efficiency

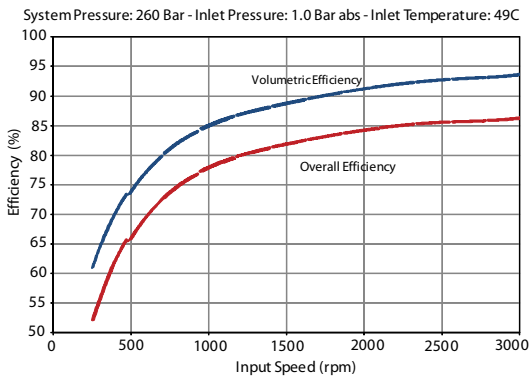

Noise

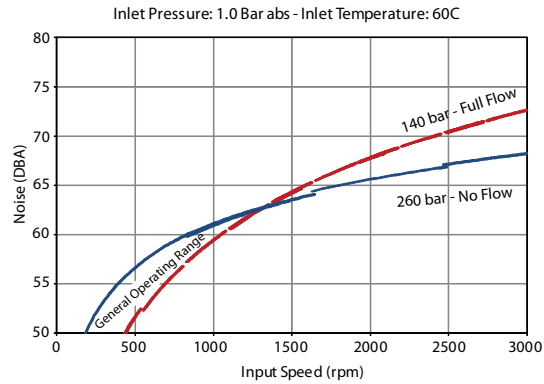

Inlet pressure vs. speed

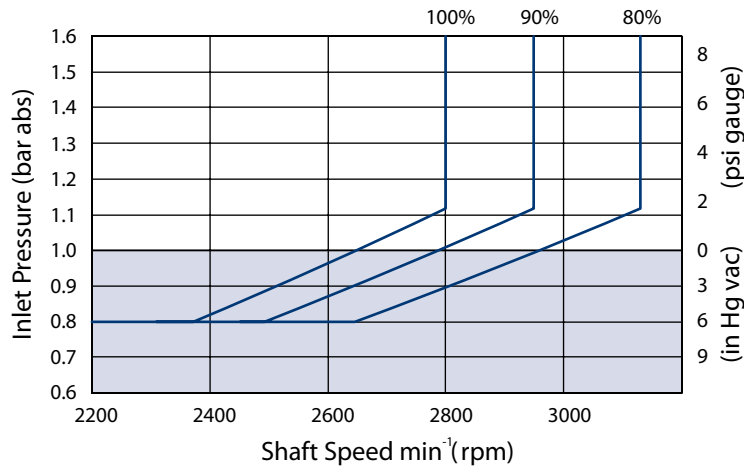


The chart above shows allowable inlet pressure and speed at various displacements. Greater speeds and lower inlet pressures are possible at reduced displacement. Operating outside of acceptable limits reduces pump life.

Frames L and K

Performance K45D

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].

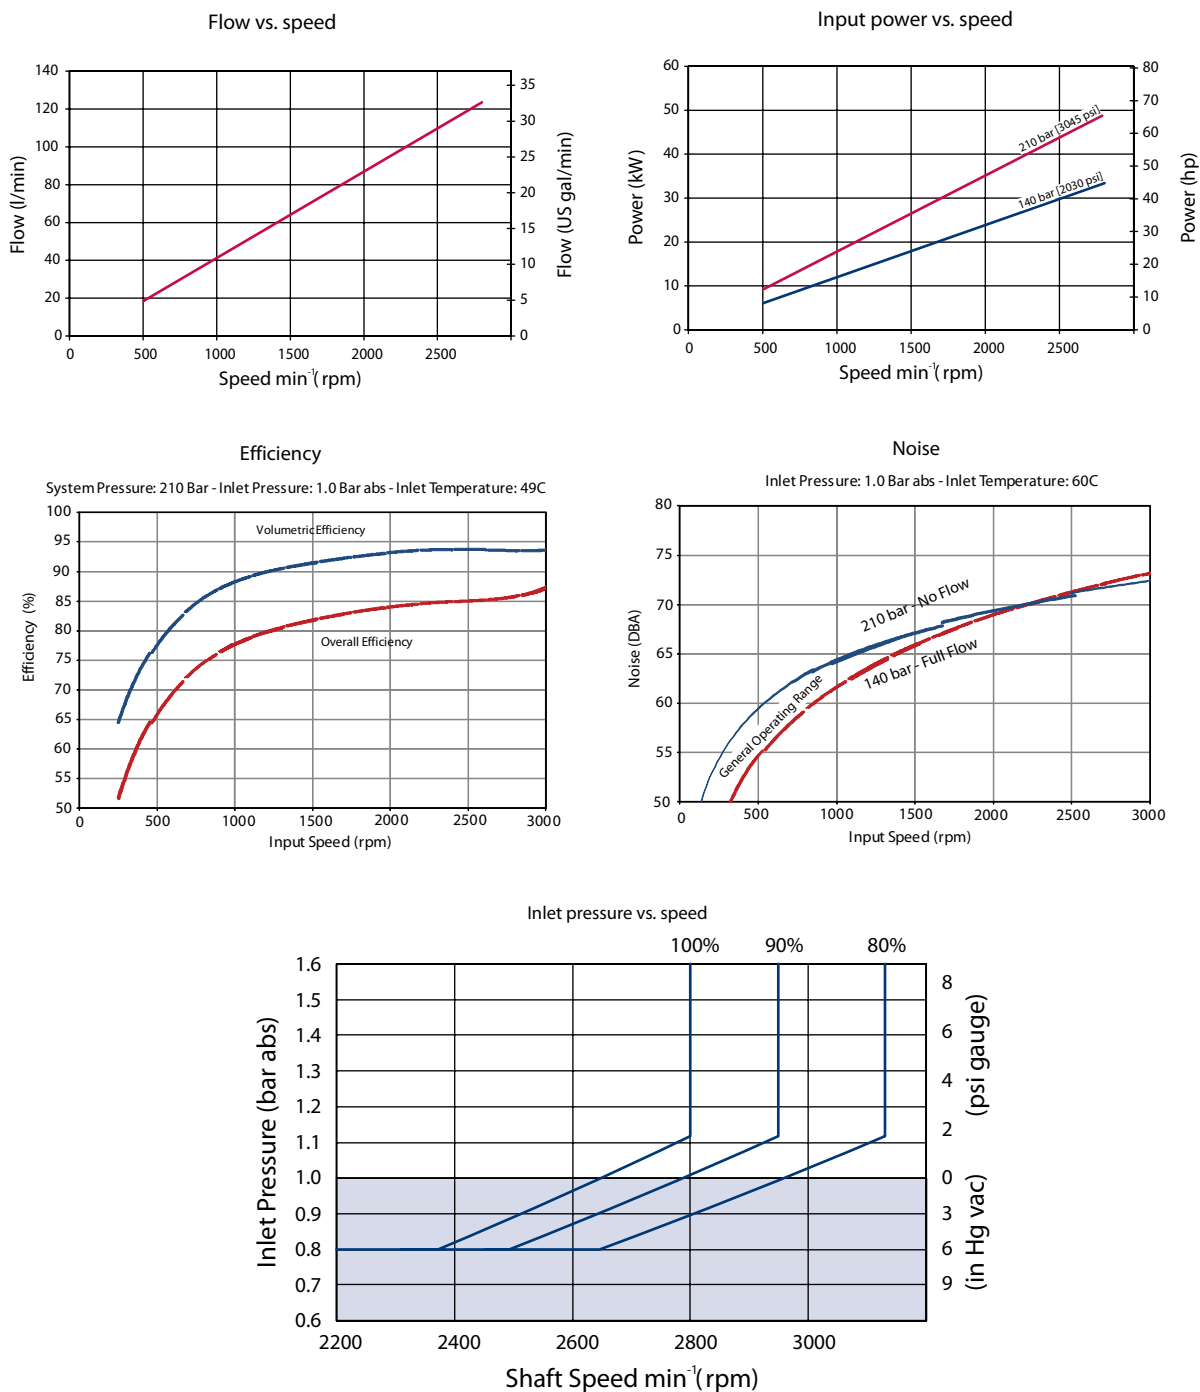

The chart above shows allowable inlet pressure and speed at various displacements. Greater speeds and lower inlet pressures are possible at reduced displacement. Operating outside of acceptable limits reduces pump life.

Frames L and K

Hydraulic Controls

Pressure Compensated Controls


Response/Recovery Times

| (ms) | Response | Recovery |
|------|----------|----------|
| L25C | 30 | 90 |
| L30D | 30 | 100 |
| K38C | 30 | 105 |
| K45D | 30 | 110 |

PC Setting Range

| Model | bar | psi |
|-------|---------|-----------|
| L25C | 100–260 | 1450–3770 |
| L30D | 100–210 | 1450–3045 |
| K38C | 100–260 | 1450–3770 |
| K45D | 100–210 | 1450–3045 |

Schematic

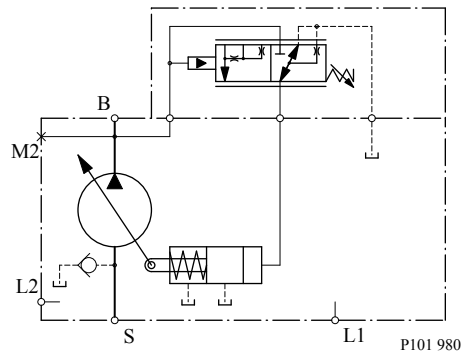

B = Outlet

S = Inlet

L1, L2 = Case drain

M2 = System pressure gauge port

Remote Pressure Compensated Controls

Response/Recovery Times


| (ms) | Response | Recovery |
|------|----------|----------|
| L25C | 30 | 90 |
| L30D | 30 | 100 |
| K38C | 30 | 105 |
| K45D | 30 | 110 |

Frames L and K

PC Setting Range

| Model | bar | psi |
|-------|---------|-----------|
| L25C | 100–260 | 1450–3770 |
| L30D | 100–210 | 1450–3045 |
| K38C | 100–260 | 1450–3770 |
| K45D | 100–210 | 1450–3045 |

Schematic

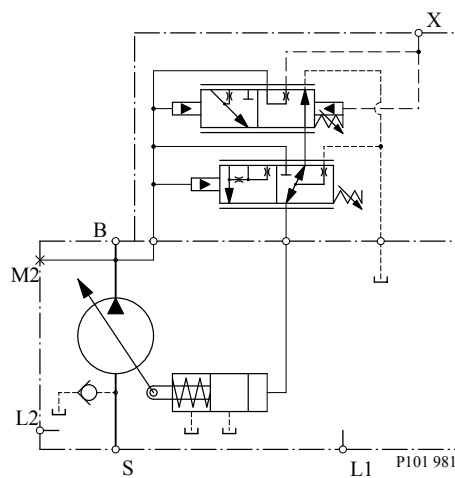

B = Outlet

S = Inlet

L1, L2 = Case drain

M2 = System pressure gauge port

X = Remote PC port

Load Sensing/Pressure Compensated Controls

Response/Recovery Times

| (ms) | Response | Recovery |
|------|----------|----------|
| L25C | 30 | 70 |
| L30D | 30 | 70 |
| K38C | 30 | 80 |
| K45D | 30 | 80 |

PC Setting Range


| Model | bar | psi |
|-------|---------|-----------|
| L25C | 100–260 | 1450–3770 |
| L30D | 100–210 | 1450–3045 |
| K38C | 100–260 | 1450–3770 |
| K45D | 100–210 | 1450–3045 |

Frames L and K

LS setting range

| Model | bar | psi |
|-------|-------|---------|
| All | 12-40 | 174-580 |

Schematic

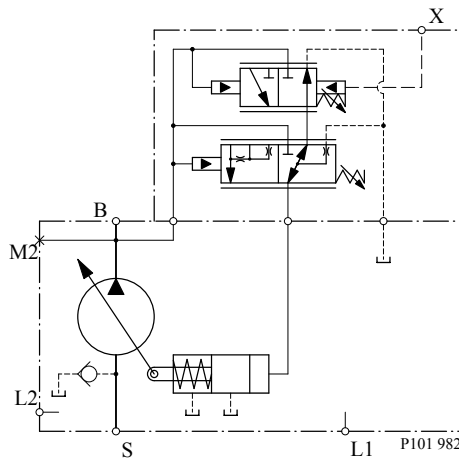

B = Outlet

S = Inlet

L1, L2 = Case drain

M2 = System pressure gauge port

X = LS signal port

Load Sensing Control with Bleed Orifice /Pressure Compensated

Response/Recovery Times

| (ms) | Response | Recovery |
|------|----------|----------|
| L25C | 30 | 70 |
| L30D | 30 | 70 |
| K38C | 30 | 80 |
| K45D | 30 | 80 |

PC Setting Range


| Model | bar | psi |
|-------|---------|-----------|
| L25C | 100-260 | 1450-3770 |
| L30D | 100-210 | 1450-3045 |
| K38C | 100-260 | 1450-3770 |
| K45D | 100-210 | 1450-3045 |

LS setting range

| Model | bar | psi |
|-------|-------|---------|
| All | 12-40 | 174-580 |

Frames L and K

LB Schematic

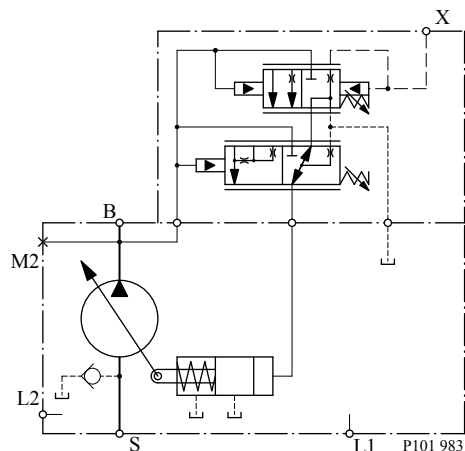


- B = Outlet
- S = Inlet
- L1, L2 = Case drain
- M2 = System pressure gauge port
- X = LS signal port

Electric Controls

Connector


| Description | Quantity | Ordering Number |
|--------------------------------|----------|-------------------------|
| Mating Connector | 1 | Deutsch® DT06-2S |
| Wedge Lock | 1 | Deutsch® W25 |
| Socket Contact (16 and 18 AWG) | 2 | Deutsch® 0462-201-16141 |
| Danfoss mating connector kit | 1 | K29657 |



Frames L and K

Continuous Duty Operating Range

Continuous duty operating range

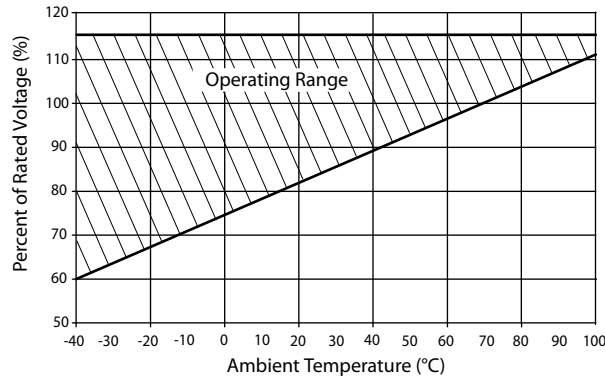

Solenoid Data - Normally Closed

| Voltage | 12V | 24V |
|---|---------|---------|
| Threshold Control [mA] (260/210 bar PC setting, oil temp X) | 400/600 | 200/300 |
| End Current [mA] (20 bar LS setting, oil temp X) | 1200 | 600 |

Solenoid Data - Normally Open

| Voltage | 12V | 24V |
|--|-----------|---------|
| Threshold Control [mA] (20 bar LS setting, oil temp X) | 0 | 0 |
| End Current [mA] (260/210 bar PC setting, oil temp X) | 1000/1100 | 500/550 |

Hysteresis

| Frame | Hysteresis |
|------------|--|
| L25C, K38C | Input hysteresis <4% (control current): Output hysteresis <4.5% (system pressure) |
| L30D, K45D | Input hysteresis <4% (control current): Output hysteresis <4.5% (system pressure) |

Normally Closed Electric On/Off with Pressure Compensation Controls

*Response/Recovery times**

| (msec) | Response | Recovery |
|--------|----------|----------|
| L25C | 50 | 140 |
| L30D | 50 | 130 |
| K38C | 50 | 140 |
| K45D | 50 | 130 |

* Without servo control orifice: response/recovery from solenoid energized/de-energized.

Frames L and K


PC setting range

| Frame | EB (12V) | EE (24V) |
|-------|--------------------------------|--------------------------------|
| L25C | 100-260 bar [1450-3370] psi | 100-260 bar [1450-3370] psi |
| K38C | | |
| L30D | 100-210 bar [1450-3045] psi | 100-210 bar [1450-3045] psi |
| K45D | | |

LS setting range

| Model | bar | psi |
|-------|---------|-------------|
| All | 12 - 40 | [174 - 580] |

Schematic

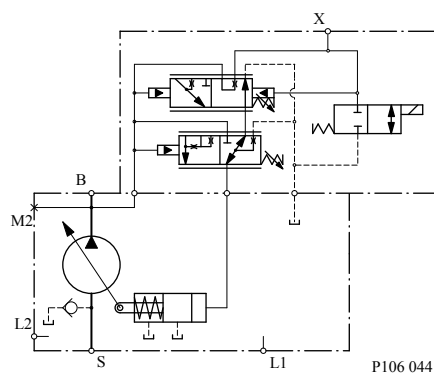

B = Outlet

S = Inlet

L1, L2 = Case drain

M2 = System pressure gauge port

X = Load Sense Port

For fan-drive systems, and systems with motors, select an LS setting no less than 15 bar to enhance system stability. As the LS setting is reduced, the risk for system instability may be increased. A 20 bar LS setting is recommended as a starting point for all new applications.

Normally Open Electric On/Off with Pressure Compensation Controls

Response/Recovery times*

| (msec) | Response | Recovery |
|--------|----------|----------|
| L25C | 50 | 140 |
| L30D | 50 | 130 |
| K38C | 50 | 140 |
| K45D | 50 | 130 |

* Without servo control orifice: response/recovery from solenoid energized/de-energized.

Frames L and K


PC setting range

| Frame | EA (12V) | EG (24V) |
|-------|--------------------------------|--------------------------------|
| L25C | 100-260 bar [1450-3370] psi | 100-260 bar [1450-3370] psi |
| K38C | | |
| L30D | 100-210 bar [1450-3045] psi | 100-210 bar [1450-3045] psi |
| K45D | | |

LS setting range

| Model | bar | psi |
|-------|---------|-------------|
| All | 12 - 40 | [174 - 580] |

Schematic

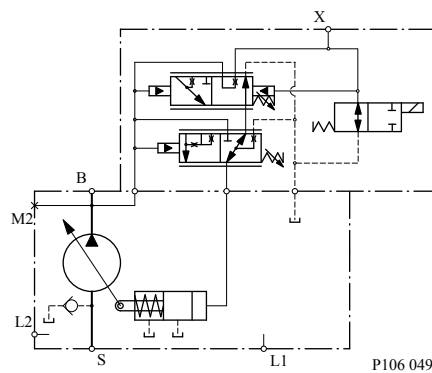

- B = Outlet
- S = Inlet
- L1, L2 = Case drain
- M2 = System pressure gauge port
- X = Load Sense Port

For fan-drive systems, and systems with motors, select an LS setting no less than 15 bar to enhance system stability. As the LS setting is reduced, the risk for system instability may be increased. A 20 bar LS setting is recommended as a starting point for all new applications.

Normally Closed Electric Proportional Controls with PC and LS Compensation

Response/Recovery times

| (msec) | 0.8mm Orifice | | 1.0mm Orifice | |
|--------|---------------|----------|---------------|----------|
| | Response | Recovery | Response | Recovery |
| L25C | 80 | 610 | 70 | 380 |
| L30D | 60 | 610 | 55 | 380 |
| K38C | 80 | 550 | 70 | 380 |
| K45D | 60 | 550 | 55 | 380 |

Frames L and K


PC setting range

| Frame | EM (12V) | EN (24V) |
|-------|--------------------------------|--------------------------------|
| L25C | 100-260 bar [1450-3370] psi | 100-260 bar [1450-3370] psi |
| K38C | | |
| L30D | 100-210 bar [1450-3045] psi | 100-210 bar [1450-3045] psi |
| K45D | | |

LS setting range

| Model | bar | psi |
|-------|---------|-------------|
| All | 12 - 40 | [174 - 580] |

Schematic

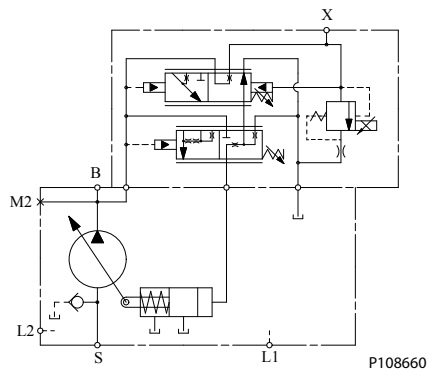

B = Outlet

S = Inlet

L1, L2 = Case drain

M2 = System pressure gauge port


X = Load Sense Port

For fan-drive systems, and systems with motors, select an LS setting no less than 15 bar to enhance system stability. As the LS setting is reduced, the risk for system instability may be increased. A 20 bar LS setting is recommended as a starting point for all new applications.

Electric proportional controls have a unique relationship between margin (LS) setting and low pressure standby. See the graph below for this relationship.

Frames L and K

**Frames K, L Electric Proportional Control
Low Pressure Standby**

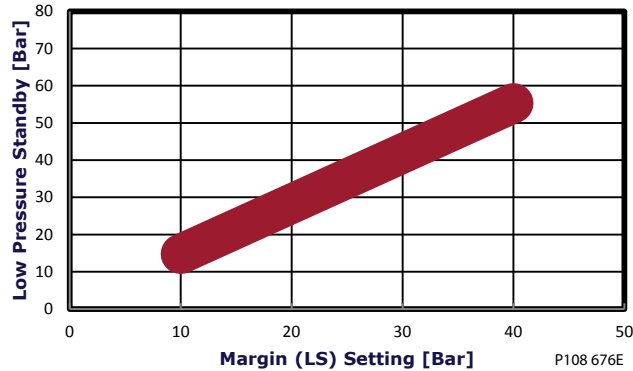

Normally Open Electric Proportional Controls with PC and LS Compensation

Response/Recovery times

| (msec) | 0.8mm Orifice | | 1.0mm Orifice | |
|--------|---------------|----------|---------------|----------|
| | Response | Recovery | Response | Recovery |
| L25C | 80 | 610 | 70 | 380 |
| L30D | 60 | 610 | 55 | 380 |
| K38C | 80 | 550 | 70 | 380 |
| K45D | 60 | 550 | 55 | 380 |

PC setting range


| Frame | EK (12V) | EL (24V) |
|-------|--------------------------------|--------------------------------|
| L25C | 100-260 bar [1450-3370] psi | 100-260 bar [1450-3370] psi |
| K38C | | |
| L30D | 100-210 bar [1450-3045] psi | 100-210 bar [1450-3045] psi |
| K45D | | |

LS setting range

| Model | bar | psi |
|-------|---------|-------------|
| All | 12 - 40 | [174 - 580] |

Frames L and K

Schematic

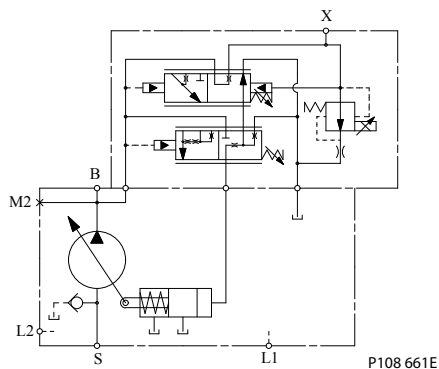


- B = Outlet
- S = Inlet
- L1, L2 = Case drain
- M2 = System pressure gauge port
- X = Load Sense Port

For fan-drive systems, and systems with motors, select an LS setting no less than 15 bar to enhance system stability. As the LS setting is reduced, the risk for system instability may be increased. A 20 bar LS setting is recommended as a starting point for all new applications.

Electric proportional controls have a unique relationship between margin (LS) setting and low pressure standby. See the graph below for this relationship.

**Frames K, L Electric Proportional Control
 Low Pressure Standby**

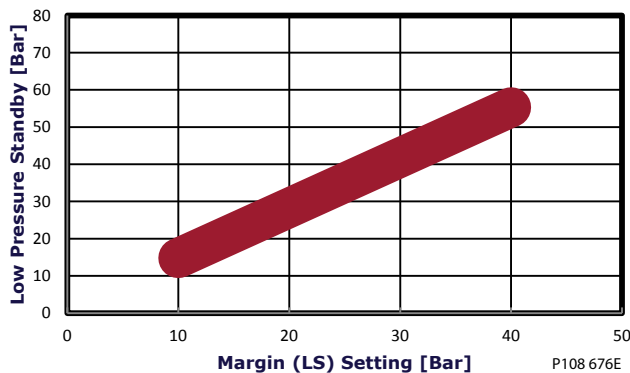

Frames L and K

Input shafts

| Code | Description | Maximum torque rating ¹ N·m [lbf·in] | Drawing |
|------|--|--|---|
| C2 | 13 tooth spline 16/32 pitch (ANSI B92.1 1970 - Class 6e) | 288 [2546] | <p>13 TOOTH 16/32 PITCH 30° PRESSURE ANGLE 20.638 [0.813] PITCH DIA FILLET ROOT SIDE FIT COMPATIBLE WITH ANSI B92.1-1970 CLASS 6e ALSO MATES WITH FLAT ROOT SIDE FIT</p> <p>Ø18.82 [0.74] MAX</p> <p>8 ± 0.475 [0.31 ± 0.02]</p> <p>15.2 ± 0.5 [0.6 ± 0.02]</p> <p>33 [1.3]</p> <p>P101993E</p> <p>COUPLING MUST NOT PROTRUDE BEYOND THIS POINT</p> |
| C3 | 15 tooth spline 16/32 pitch (ANSI B92.1 1970 - Class 6e) | 404 [3575] | <p>15 TOOTH 16/32 PITCH 30° PRESSURE ANGLE 23.813 [0.938] PITCH DIA FILLET ROOT SIDE FIT COMPATIBLE WITH ANSI B92.1-1970 CLASS 6e ALSO MATES WITH FLAT ROOT SIDE FIT</p> <p>Ø21.92 MAX [0.863]</p> <p>8 ± 0.475 [0.31 ± 0.02]</p> <p>23.35 ± 0.5 [0.92 ± 0.02]</p> <p>38 [1.5]</p> <p>P101994E</p> <p>COUPLING MUST NOT PROTRUDE BEYOND THIS POINT</p> |
| T1 | Ø 25.4 mm [1 in] 1:8 taper (SAE J501) | 362 [3200] | <p>69.89 REF [2.75]</p> <p>25.4 [1]</p> <p>8 ± 0.8 [0.31 ± 0.03]</p> <p>34.92 ± 0.63 [1.375 ± 0.025]</p> <p>26.97 [1.06]</p> <p>6.299^{+0.025}_{-0.000} [0.248^{+0.001}_{-0.000}]</p> <p>22.225^{+0.254}_{-0.000} [0.875^{+0.010}_{-0.010}]</p> <p>WOODRUFF KEY</p> <p>Ø22.22 GAUGE [0.87]</p> <p>3/4-16UNF-2A THD</p> <p>125 TAPER PER METER COMPATIBLE WITH SAE J501 25.4 [1] NOMINAL SHAFT DIAMETER</p> <p>9.42 ± 0.3 [0.37 ± 0.01] GAUGE</p> <p>P101 996E</p> <p>COUPLING MUST NOT PROTRUDE BEYOND THIS POINT</p> |



Frames L and K

| Code | Description | Maximum torque rating ¹ N·m [lbf·in] | Drawing |
|------|---|--|---------|
| K1 | Ø 22.23 mm [0.875 in] 33 mm [1.3 in] | 305 [2700] | |
| K2 | Ø 22.23 mm [0.875 in] 63 mm [2.48 in] long | 305 [2700] | |

1. See [Input shaft torque ratings](#) for an explanation of maximum torque.


Installation drawings

Axial Ported Endcap

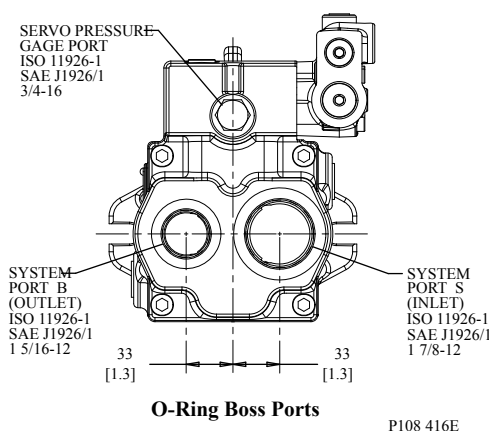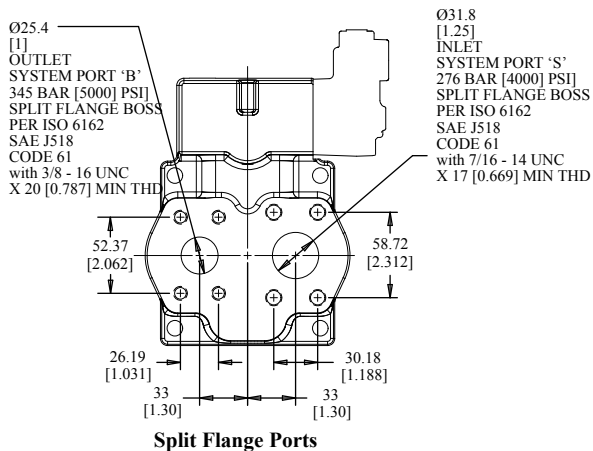


Frames L and K

Axial Ported Endcap Installation Dimensions

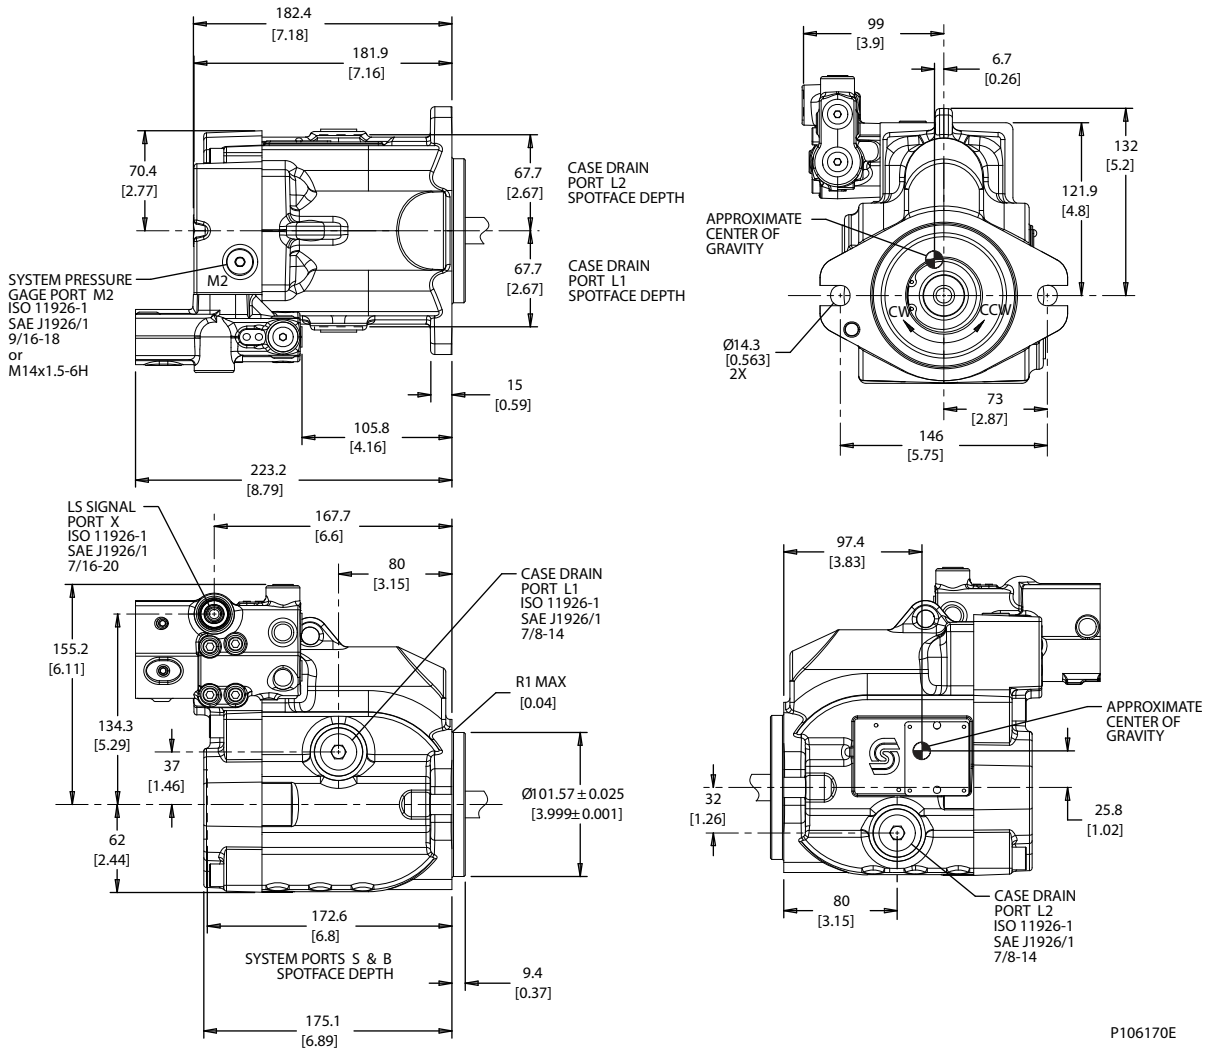


Radial Ported Endcap Split Flange Ports

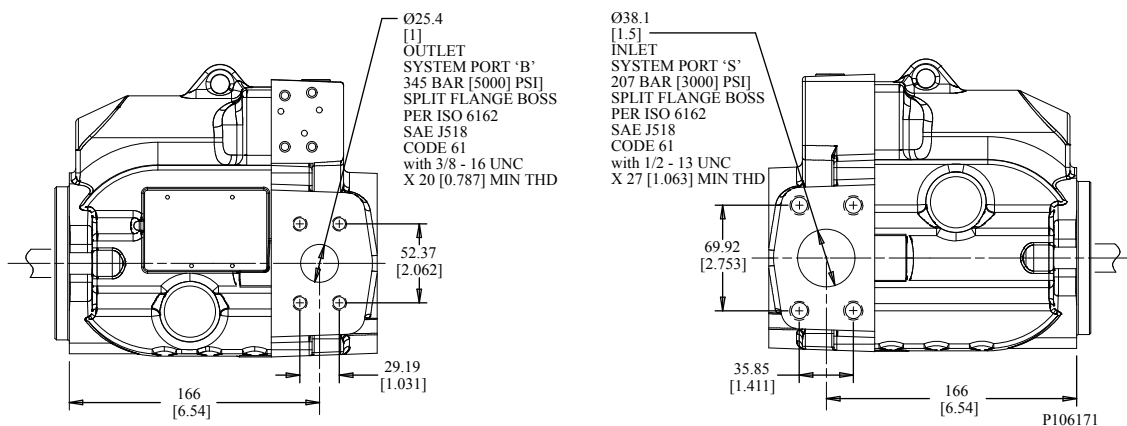


Frames L and K

Radial Ported Endcap O-ring Boss Ports

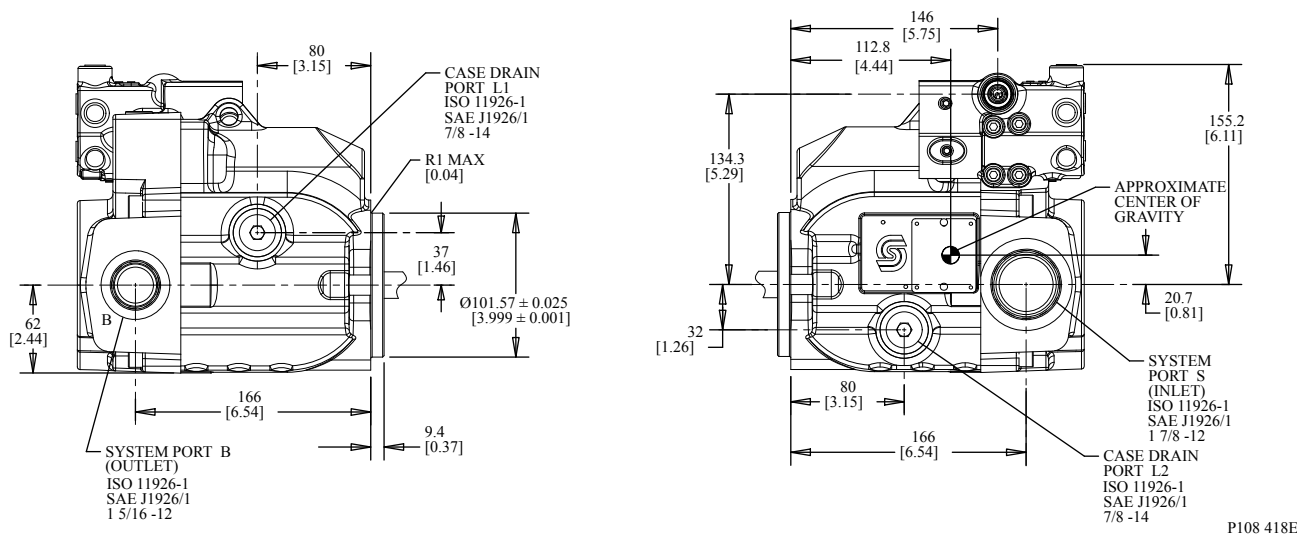

P108 418E


Radial Ported Endcap Rear View

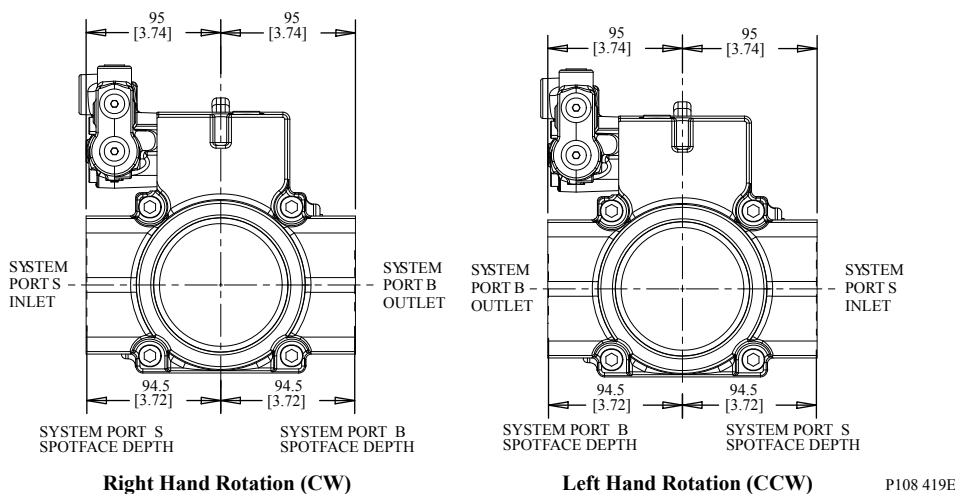


P108 419E

Frames L and K

Radial Ported Endcap Installation Dimensions

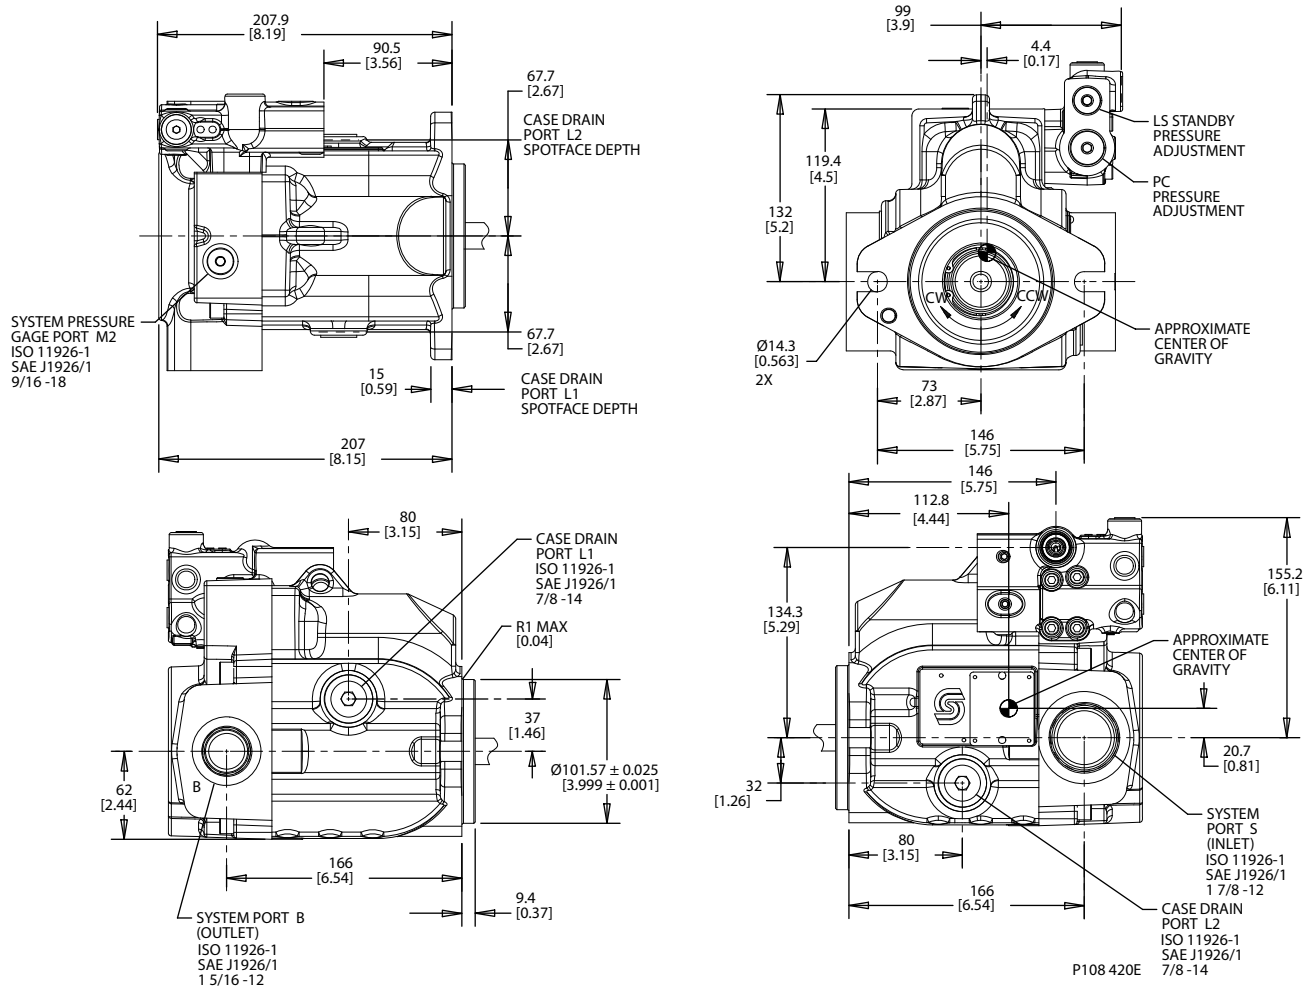


Front Mounting Flange - SAE-B two bolt

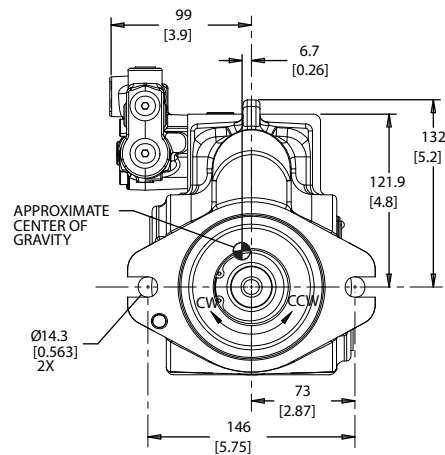

Frames L and K

Auxiliary Mounting Pads


SAE-A auxiliary mounting pad

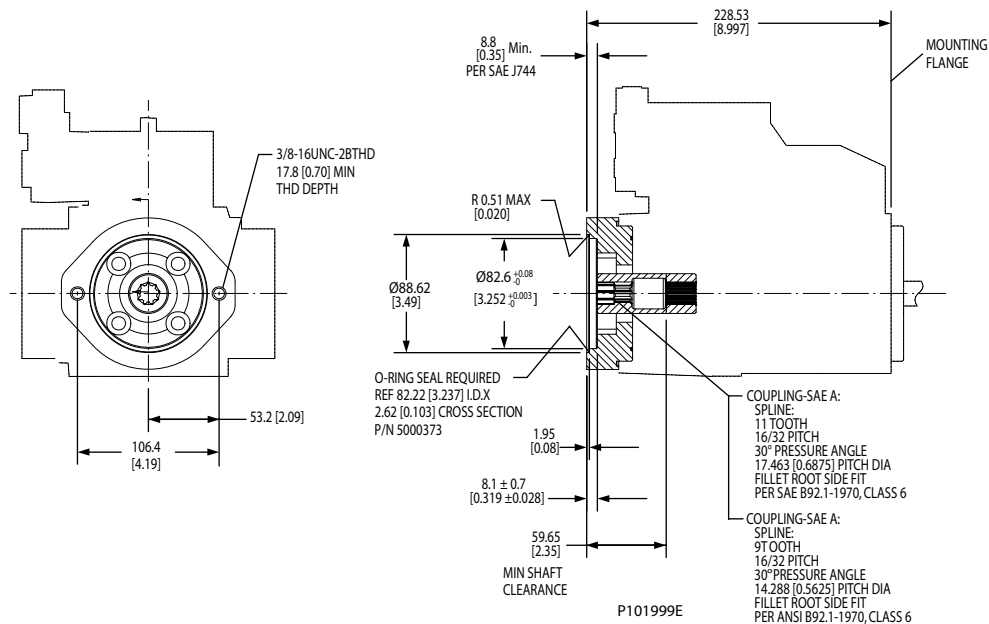

Specifications

| Coupling | 9-tooth | 11-tooth |
|---------------------------|----------------------|-----------------------|
| Spline minimum engagement | 12.6 mm [0.50 in] | 13.5 mm [0.53 in] |
| Maximum torque | 107 N•m [950 lbf•in] | 147 N•m [1300 lbf•in] |

SAE-B auxiliary mounting pad

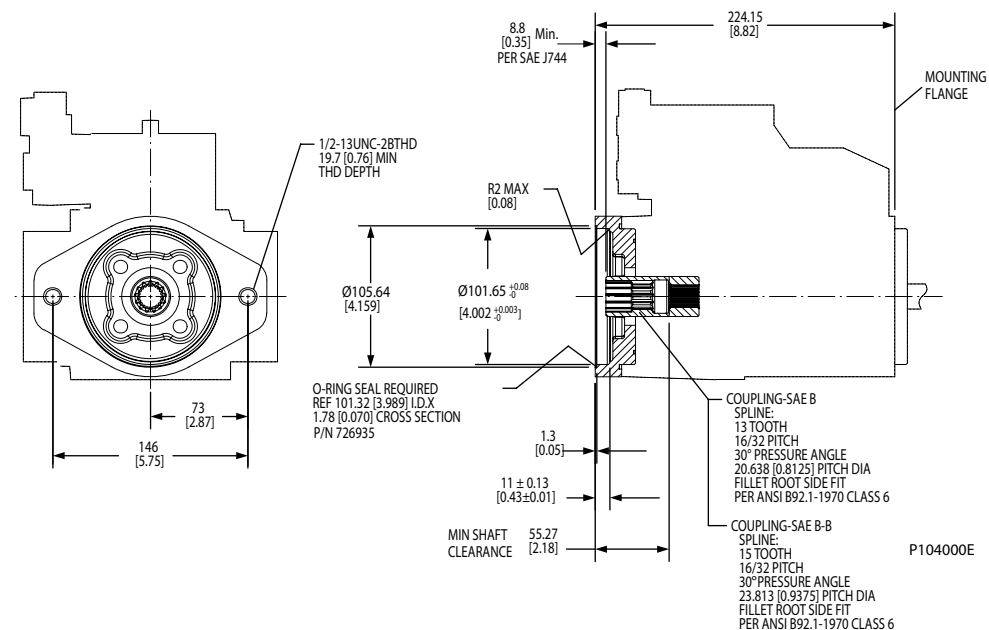


Frames L and K

Specifications


| Coupling | 13-tooth | 15-tooth |
|---------------------------|-----------------------|-----------------------|
| Spline minimum engagement | 13.2 mm [0.52 in] | 16.1 mm [0.63 in] |
| Maximum torque | 171 N•m [1512 lbf•in] | 171 N•m [1512 lbf•in] |

Auxiliary Mounting Pad - Running Cover

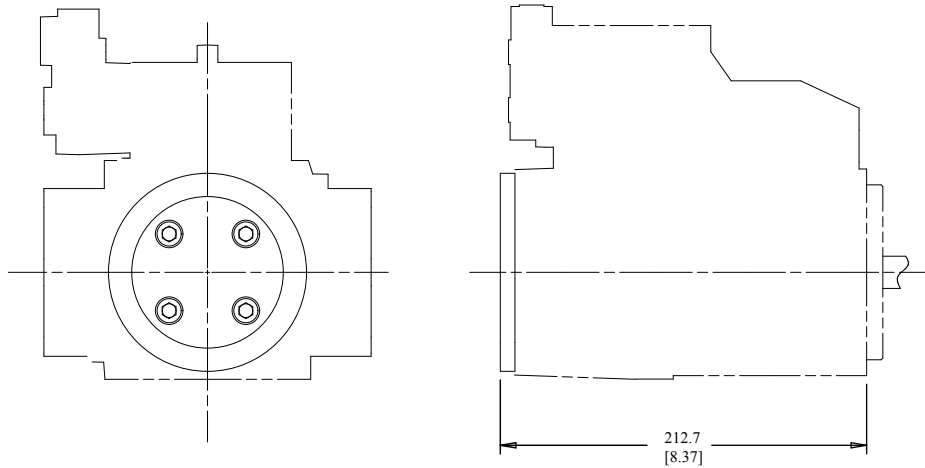


P106 077E

Electric Solenoid, Left Side

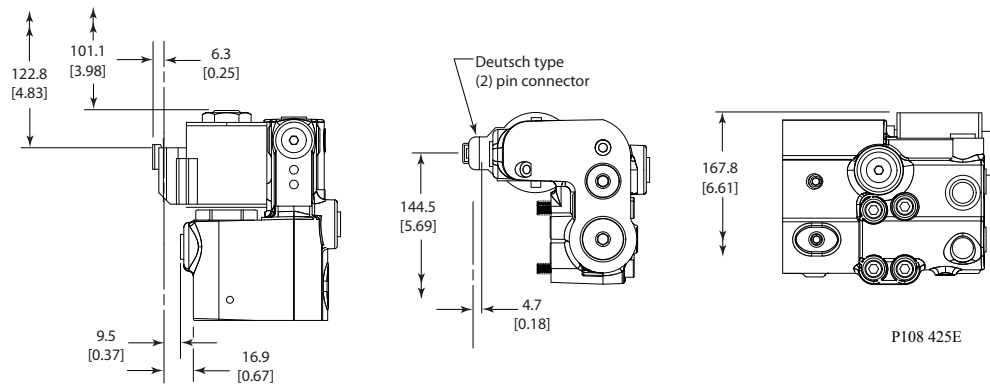

P108 425E

Electric Solenoid, Right Side

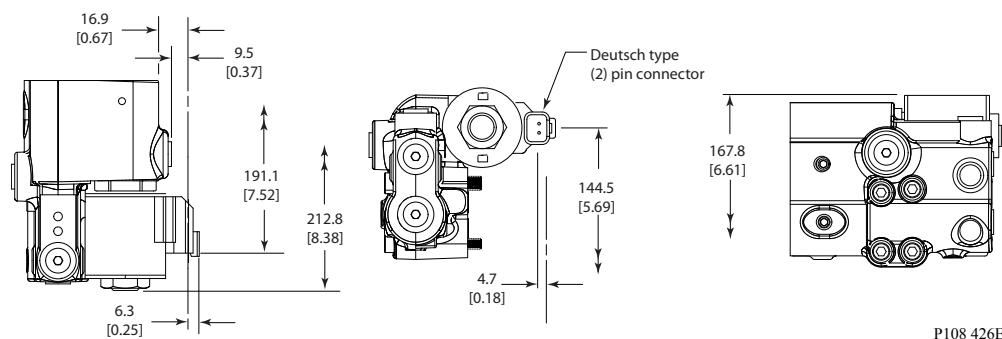


P108 426E

Frames L and K

Displacement limiter

L and K Frame open circuit pumps are available with an optional adjustable displacement limiter. This adjustable stop limits the pump's maximum displacement.

Cross-Section

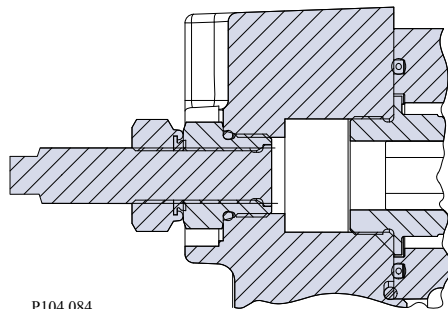


Setting range

| | |
|------|--|
| L25C | 0 to 25 cm ³ [0 to 1.53 in ³] |
| L30D | 0 to 30 cm ³ [0 to 1.83 in ³] |
| K38C | 0 to 38 cm ³ [0 to 2.32 in ³] |
| K45D | 0 to 45 cm ³ [0 to 2.75 in ³] |

Displacement per turn

| | |
|------|---|
| L25C | 1.20 cm ³ /rev [0.07 in ³ /rev] |
| L30D | 1.43 cm ³ /rev [0.09 in ³ /rev] |
| K38C | 1.81 cm ³ /rev [0.11 in ³ /rev] |
| K45D | 2.15 cm ³ /rev [0.13 in ³ /rev] |

Installation Dimensions

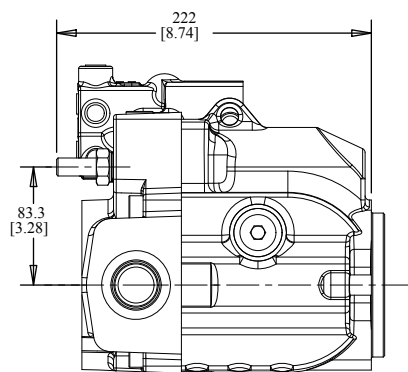


Frame J

Design

Series 45 Frame J pumps have a single servo piston design with a cradle-type swashplate set in polymer-coated journal bearings. A bias spring and internal forces increase swashplate angle. The servo piston decreases swashplate angle. Nine reciprocating pistons displace fluid from the pump inlet to the pump outlet as the cylinder block rotates on the pump input shaft. The block spring holds the piston slippers to the swashplate via the slipper retainer. The cylinder block rides on a bi-metal valve plate optimized for high volumetric efficiency and low noise. Tapered roller bearings support the input shaft and a viton lip-seal protects against shaft leaks.

An adjustable one spool (PC only, not shown) or two spool (LS and PC) control senses system pressure and load pressure (LS controls). The control ports system pressure to the servo piston to control pump output flow.

Frame J cross section

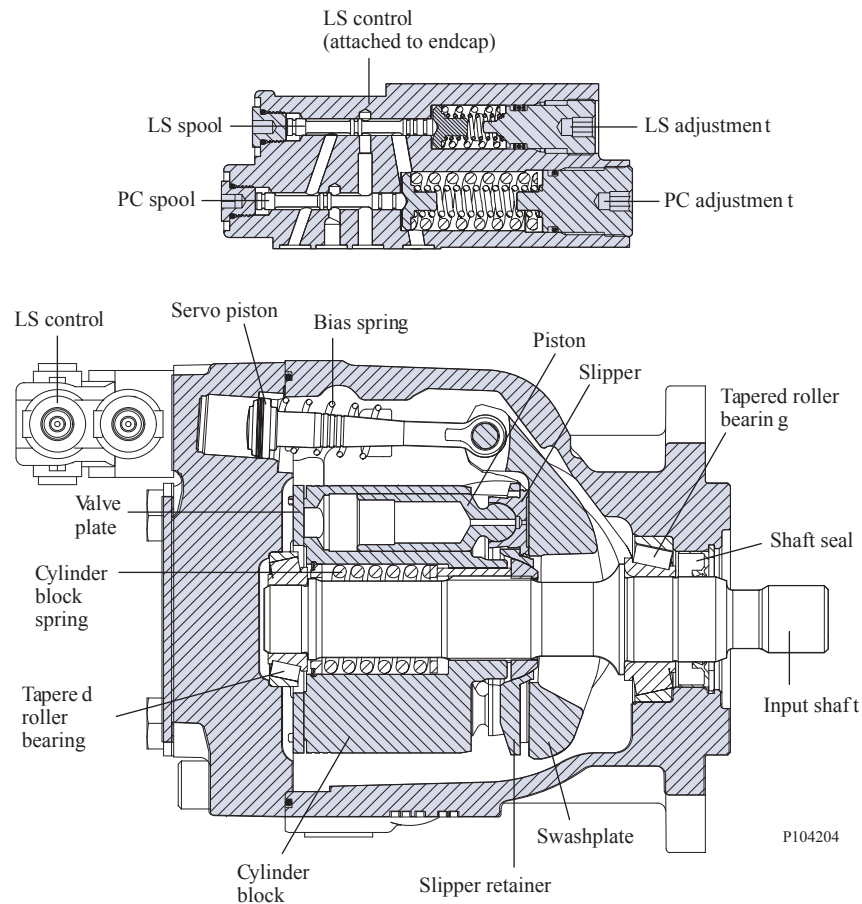

Frame J

Technical Specifications

| | | | J Frame | | | | |
|---|-----------------------------|--|--|----------------------|----------------------|----------------------|----------------------|
| | | Unit | S45B | S51B | S60B | S65C | S75C |
| Maximum Displacement | | cm ³ [in ³] | 45 [2.75] | 51 [3.11] | 60 [3.66] | 65 [3.97] | 75 [4.58] |
| Working Input Speed | Minimum | min -1 (rpm) | 500 | 500 | 500 | 500 | 500 |
| | Continuous | | 2800 | 2700 | 2600 | 2500 | 2400 |
| | Maximum | | 3360 | 3240 | 3120 | 3000 | 2880 |
| Working Pressure | Continuous | bar [psi] | 310 [4500] | 310 [4500] | 310 [4500] | 260 [3770] | 260 [3770] |
| | Maximum | | 400 [5800] | 400 [5800] | 400 [5800] | 350 [5075] | 350 [5075] |
| Flow at rated speed (theoretical) | | l/min [US gal/min] | 126 [33.3] | 138 [36.4] | 156 [41.2] | 162 [42.9] | 180 [47.5] |
| Input torque at maximum displacement (theoretical) at 49° C [120°F] | | N·m/bar [lbf·in/1000 psi] | 0.717 [437.4] | 0.812 [495.7] | 0.955 [583.2] | 1.035 [631.8] | 1.194 [729] |
| Mass moment of inertia of internal rotating components | | kg·m ² [slug·ft ²] | 0.00455 [0.00336] | 0.00455 [0.00336] | 0.00455 [0.00336] | 0.00433 [0.00319] | 0.00433 [0.00319] |
| Weight | Axial ports | kg [lb] | 23.1 [51.0] | | | | |
| | Radial ports | | 27.3 [60.2] | | | | |
| External Shaft Loads | External moment (Me) | N·m [lbf·in] | 226 [2000] | 226 [2000] | 226 [2000] | 226 [2000] | 226 [2000] |
| | Thrust in (Tin), out (Tout) | N [lbf] | 2200 [495] | 2200 [495] | 2200 [495] | 2200 [495] | 2200 [495] |
| Mounting flange load moments | Vibratory (continuous) | N·m [lbf·in] | SAE-C: 1500 [13300], SAE-B: 735 [6600] | | | | |
| | Shock (maximum) | | SAE-C: 5600 [49600], SAE-B: 2600 [23100] | | | | |

Order code

Code description

| Code | Description |
|------|--|
| R | Product Frame, Variable Open Circuit Pump |
| S | Rotation |
| P | Displacement |
| C | Control Type |
| D | Pressure Compensator Setting |
| E | Load Sense Setting |
| F | Not Used |
| G | Choke Orifice |
| H | Gain Orifice |
| J | Input Shaft/Auxiliary Mount/Endcap |
| K | Shaft Seal/Front Mounting Flange/Housing Ports |
| L | Displacement Limiter |
| M | Special Hardware |
| N | Special Features |

Frame J

R Product

| | | J Frame | | | | |
|----|--|---------|------|------|------|------|
| | | S45B | S51B | S60B | S65C | S75C |
| JR | J Frame, variable displacement open circuit pump | • | • | • | • | • |

S Rotation

| | | | | | | |
|---|------------------------------|---|---|---|---|---|
| L | Left Hand (counterclockwise) | • | • | • | • | • |
| R | Right Hand (clockwise) | • | • | • | • | • |

P Displacement

| | | | | | | |
|------|--|---|---|---|---|---|
| S45B | 045 cm ³ /rev [2.75 in ³ /rev] | • | | | | |
| S51B | 051 cm ³ /rev [3.11 in ³ /rev] | | • | | | |
| S60B | 060 cm ³ /rev [3.66 in ³ /rev] | | | • | | |
| S65C | 065 cm ³ /rev [3.97 in ³ /rev] | | | | • | |
| S75C | 075 cm ³ /rev [4.58 in ³ /rev] | | | | | • |

C Control type

| | | J Frame | | | | |
|-----|--|---------|------|------|------|------|
| | | S45B | S51B | S60B | S65C | S75C |
| PC | Pressure Compensator | • | • | • | • | • |
| BC* | Pressure Compensator [>280 bar] | • | • | • | | |
| RP | Remote Pressure Compensator | • | • | • | • | • |
| BP* | Remote Pressure Compensator [>280 bar] | • | • | • | | |
| LS | Load Sensing/Pressure Comp. | • | • | • | • | • |
| BS* | Load Sensing/Pressure Comp. [>280 bar] | • | • | • | | |
| LB | Load Sensing/Pressure Comp. with internal bleed orifice | • | • | • | • | • |
| BB* | Load Sensing/Pressure Comp. with internal bleed orifice [>280 bar] | • | • | • | | |
| AN | Electric On/Off w/Pressure Comp. (NO, 12VDC) Left | • | • | • | • | • |
| CN | Electric On/Off w/Pressure Comp. (NO, 24VDC) Left | • | • | • | • | • |
| AR | Electric On/Off w/Pressure Comp. (NC, 12VDC) Left | • | • | • | • | • |
| CR | Electric On/Off w/Pressure Comp. (NC, 24VDC) Left | • | • | • | • | • |
| AF | Electric On/Off w/Pressure Comp. (NO, 12VDC) Right | • | • | • | • | • |
| AT | Electric On/Off w/Pressure Comp. (NO, 24VDC) Right | • | • | • | • | • |
| AG | Electric On/Off w/Pressure Comp. (NC, 12VDC) Right | • | • | • | • | • |
| AY | Electric On/Off w/Pressure Comp. (NC, 24VDC) Right | • | • | • | • | • |
| BN* | Electric On/Off w/Pressure Comp. (NO, 12VDC) [>280 bar] Left | • | • | • | | |

Frame J

C Control type (continued)

| | | J Frame | | | | |
|-----|---|----------------|-------------|-------------|-------------|-------------|
| | | S45B | S51B | S60B | S65C | S75C |
| DN* | Electric On/Off w/Pressure Comp. (NO, 24VDC) [>280 bar] Left | • | • | • | | |
| BR* | Electric On/Off w/Pressure Comp. (NC, 12VDC) [>280 bar] Left | • | • | • | | |
| DR* | Electric On/Off w/Pressure Comp. (NC, 24VDC) [>280 bar] Left | • | • | • | | |
| BF* | Electric On/Off w/Pressure Comp. (NO, 12VDC) [>280 bar] Right | • | • | • | | |
| DF* | Electric On/Off w/Pressure Comp. (NO, 24VDC) [>280 bar] Right | • | • | • | | |
| BE* | Electric On/Off w/Pressure Comp. (NC, 12VDC) [>280 bar] Right | • | • | • | | |
| BG* | Electric On/Off w/Pressure Comp. (NC, 24VDC) [>280 bar] Right | • | • | • | | |
| AX | Electric Proportional Pressure Control w/Pressure Comp. (NO,12VDC) Left | • | • | • | • | • |
| CL | Electric Proportional Pressure Control w/Pressure Comp. (NO,24VDC) Left | • | • | • | • | • |
| AH | Electric Proportional Pressure Control w/Pressure Comp. (NC,12VDC) Left | • | • | • | • | • |
| AL | Electric Proportional Pressure Control w/Pressure Comp. (NC,24VDC) Left | • | • | • | • | • |
| AW | Electric Proportional Pressure Control w/Pressure Comp. (NO,12VDC) Right | • | • | • | • | • |
| CK | Electric Proportional Pressure Control w/Pressure Comp. (NO,24VDC) Right | • | • | • | • | • |
| AV | Electric Proportional Pressure Control w/Pressure Comp. (NC,12VDC) Right | • | • | • | • | • |
| AK | Electric Proportional Pressure Control w/Pressure Comp. (NC,24VDC) Right | • | • | • | • | • |
| BX* | Electric Proportional Pressure Control w/Pressure Comp. (NO,12VDC) [>280 bar] Left | • | • | • | | |
| DL* | Electric Proportional Pressure Control w/Pressure Comp. (NO,24VDC) [>280 bar] Left | • | • | • | | |
| BH* | Electric Proportional Pressure Control w/Pressure Comp. (NC,12VDC) [>280 bar] Left | • | • | • | | |
| BL* | Electric Proportional Pressure Control w/Pressure Comp. (NC,24VDC) [>280 bar] Left | • | • | • | | |
| BW* | Electric Proportional Pressure Control w/Pressure Comp. (NO,12VDC) [>280 bar] Right | • | • | • | | |
| DK* | Electric Proportional Pressure Control w/Pressure Comp. (NO,24VDC) [>280 bar] Right | • | • | • | | |
| BM* | Electric Proportional Pressure Control w/Pressure Comp. (NC,12VDC) [>280 bar] Right | • | • | • | | |
| BK* | Electric Proportional Pressure Control w/Pressure Comp. (NC,24VDC) [>280 bar] Right | • | • | • | | |

Frame J

C Control type (continued)

| | | J Frame | | | | |
|-----|--|---------|------|------|------|------|
| | | S45B | S51B | S60B | S65C | S75C |
| FA* | Electric On/Off Dump valve w/ Pressure Comp. + Load Sense (NC, 12VDC) Right | • | • | • | | |
| FB* | Electric On/Off Dump valve w/ Pressure Comp. + Load Sense (NC, 12VDC) Left | • | • | • | • | • |
| FE* | Electric On/Off Dump valve w/ Pressure Comp. + Load Sense (NC, 24VDC), Left | • | • | • | • | • |
| FM* | Electric On/Off Dump valve w/ Pressure Comp. + Load Sense (NC, 24VDC), Right | • | • | • | • | • |
| TA | Electric Torque Limiting w/Pressure Comp. (NC,12VDC) Left | • | • | • | • | • |
| TB | Electric Torque Limiting w/Pressure Comp. (NC,24VDC) Left | • | • | • | • | • |
| TC | Electric Torque Limiting w/Pressure Comp. (NC,12VDC) Left | • | • | • | • | • |
| TD | Electric Torque Limiting w/Pressure Comp. (NC,24VDC) Left | • | • | • | • | • |
| TE | Electric Torque Limiting w/Pressure Comp. (NC,12VDC) Right | • | • | • | • | • |
| TF | Electric Torque Limiting w/Pressure Comp. (NC,24VDC) Right | • | • | • | • | • |
| TG | Electric Torque Limiting w/Pressure Comp. (NC,12VDC) Right | • | • | • | • | • |
| TH | Electric Torque Limiting w/Pressure Comp. (NC,24VDC) Right | • | • | • | • | • |
| SA | Pressure Comp (12 Vdc), 100-210 Bar - Left | | | • | • | • |
| SB | Pressure Comp (24 Vdc), 100-210 Bar - Left | | | • | • | • |
| SC | Pressure Comp (12 Vdc), 220-310 Bar - Left | | | • | • | • |
| SD | Pressure Comp (24 Vdc), 220-310 Bar - Left | | | • | • | • |
| SE | Pressure Comp (12 Vdc), 100-210 Bar - Right | | | • | • | • |
| SF | Pressure Comp (24 Vdc), 100-210 Bar - Right | | | • | • | • |
| SG | Pressure Comp (12 Vdc), 220-310 Bar - Right | | | • | • | • |
| SH | Pressure Comp (24 Vdc), 220-310 Bar - Right | | | • | • | • |

* Not available on 65cc and 75cc pumps

Left - E-Frame: CW Only, F-Frame: CW Only, J-frame: CW Axial, CCW Radial

Right - E-Frame: CCW Only, F-Frame: CCW Only, J-frame: CCW Axial, CW Radial

Frame J

D PC setting (2 digit code, 10 bar increments)

| | | J Frame | | | | |
|---------|-----------------------------------|---------|------|------|------|------|
| | | S45B | S51B | S60B | S65C | S75C |
| Example | 25 = 250 bar (3625 psi) | | | | | |
| 10-26 | 100 to 260 bar [1450 to 3771 psi] | • | • | • | • | • |
| 27-28 | 270 to 280 bar [3916 to 4061 psi] | • | • | • | | |
| 29-31 | 290-310 bar [4206 to 4496 psi] | • | • | • | | |

E Load sensing setting (2 digit code, 1 bar increments)

| | | | | | | |
|---------|---|---|---|---|---|---|
| Example | 20 = 20 bar (290 psi) | | | | | |
| 10-40 | 10 to 40 bar [175 to 580 psi] | • | • | • | • | • |
| NN | Not applicable (pressure compensated only controls) | • | • | • | • | • |

F Not used

| | | | | | | |
|----|----------------|---|---|---|---|---|
| NN | Not applicable | • | • | • | • | • |
|----|----------------|---|---|---|---|---|

G Servo Control Orifice

| | | | | | | |
|---|-----------------|---|---|---|---|---|
| N | None (standard) | • | • | • | • | • |
| E | 0.8 mm diameter | • | • | • | • | • |
| F | 1.0 mm diameter | • | • | • | • | • |

H Gain Orifice

| | | | | | | |
|---|--|---|---|---|---|---|
| 3 | 1.0 mm diameter (standard orifice) | • | • | • | • | • |
| C | 0.8 mm diameter LS signal line orifice for ETL use (with standard orifice) | • | • | • | • | • |

Additional LS signal line orifice size options are available for necessary system tuning requirements. Contact your Danfoss representative for further information.

J Input Shaft

| | |
|----|--|
| C2 | 13 tooth, 16/32 pitch |
| C3 | 15 tooth, 16/32 pitch |
| S1 | 14 tooth 12/24 pitch |
| S5 | 14 tooth, 12/24 pitch, with 5/16-18 UNC Thread |
| K4 | 1.25 inch straight keyed |
| T0 | 1.25 inch tapered |

Frame J

Auxiliary Mount/Endcap Style

| Auxiliary Description | Endcap Style | Inlet Porting | Outlet Porting | Endcap Description | Code |
|-----------------------|--------------|---------------|----------------|--|------|
| None | Axial | O-Ring Boss | O-Ring Boss | Inlet - SAE O-Ring boss port (1.875 inch threads) Outlet - SAE O-Ring boss port (1.3125 inch threads) | NH |
| None | Axial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) | N9 |
| None | Axial | Split Flange | Split Flange | Inlet- Code 61 Split Flange 4 Bolt (2 inch port, M12 threads) Outlet- code 61 Split Flange 4 Bolt (1 inch port, M10 threads) | NQ |
| None | Axial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads), w/ Disp. Limiter | NZ |
| None | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) | NE |
| None | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port M12 metric threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port M10 metric threads) | NX |
| None | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads), w/ Disp. Limiter, Large servo bore | NV |
| Running Cover | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) | RE |
| Running Cover | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads), w/ Disp. Limiter | RF |
| Running Cover | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port M12 metric threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port M10 metric threads) | RX |
| SAE-A, 11 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) | TE |
| SAE-A, 11 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) with integral SAE "A" Aux. pad (0.375 inch threads) | TY |

Frame J

Auxiliary Mount/Endcap Style (continued)

| Auxiliary Description | Endcap Style | Inlet Porting | Outlet Porting | Endcap Description | Code |
|------------------------------|--------------|---------------|----------------|---|------|
| SAE-A, 11 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) | TF |
| SAE-A, 11 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port M12 threads) Outlet - Code 62 Split Flange Port 4 Bolt (1 inch port M10 threads) with integral SAE "A" Aux. pad (0.375 inch threads) | TZ |
| SAE-A, 9 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) | AE |
| SAE-A, 9 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) with displacement limiter | AF |
| SAE-A, 9 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) with integral SAE "A" Aux. pad (0.375 inch threads) | AY |
| SAE-A, 9 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port M12 threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port M10 threads) | AX |
| SAE-A 9T Metric M10 | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port M12 threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port M10 threads) | AZ |
| SAE-A 11T Rotated 90 Degrees | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) with displacement limiter | GF |
| SAE-B, 13 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) | BE |
| SAE-B, 13 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads), w/ Disp. Limiter | BF |
| SAE-B, 13 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port M12 threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port M10 threads) | BX |

Frame J

Auxiliary Mount/Endcap Style (continued)

| Auxiliary Description | Endcap Style | Inlet Porting | Outlet Porting | Endcap Description | Code |
|-------------------------------|--------------|---------------|----------------|---|------|
| SAE-B, 13 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange 4 Bolt (2 inch port, M12 threads) Outlet - Code 61 Split Flange 4 Bolt (1 inch port, M10 threads) | EX |
| SAE-B, 13T Rotated 90 Degrees | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) | JE |
| SAE-BB, 15 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) | VE |
| SAE-BB, 15 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads), w/ Disp. Limiter | VF |
| SAE-BB, 15 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port M12 threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port M10 threads) | VX |
| SAE-BB, 15T Metric M12 | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port M12 threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port M10 threads) | VM |
| SAE-BB, 15 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port M12 threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port M10 threads), Large servo bore | DX |
| SAE-C, 14 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) | CE |
| SAE-C, 14 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads), w/ Disp. Limiter | CF |
| SAE-C, 14 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port M12 threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port M10 threads) | CX |

J Input Shaft/Auxiliary Mount/Endcap

Available Combinations

| | J Frame | | | | |
|-------------------|---------|------|------|------|------|
| | S45B | S51B | S60B | S65C | S75C |
| C2AE ¹ | • | • | • | • | • |
| C2AY ¹ | • | • | • | • | • |
| C2AF ¹ | • | • | • | • | • |

Frame J

| | J Frame | | | | |
|-------------------|---------|------|------|------|------|
| | S45B | S51B | S60B | S65C | S75C |
| C2AX ¹ | • | • | • | • | • |
| C2BE ¹ | • | • | • | • | • |
| C2BF ² | • | • | • | • | • |
| C2CE ¹ | • | • | • | • | • |
| C2N9 ¹ | • | • | • | • | • |
| C2NE ¹ | • | • | • | • | • |
| C2NH ¹ | • | • | • | • | • |
| C2NV ² | • | • | • | • | • |
| C2NZ ¹ | • | • | • | • | • |
| C2RE ¹ | • | • | • | • | • |
| C2RF ² | • | • | • | • | • |
| C2TE ¹ | • | • | • | • | • |
| C2TF ² | • | • | • | • | • |
| C2TY ¹ | • | • | • | • | • |
| C2VE ¹ | • | • | • | • | • |
| C3AE ¹ | • | • | • | • | • |
| C3AF ² | • | • | • | • | • |
| C3AY ¹ | • | • | • | • | • |
| C3BE ¹ | • | • | • | • | • |
| C3BF ² | • | • | • | • | • |
| C3CE ¹ | • | • | • | • | • |
| C3DX ¹ | • | • | • | • | • |
| C3GX ¹ | • | • | • | • | • |
| C3N9 ¹ | • | • | • | • | • |
| C3NE ¹ | • | • | • | • | • |
| C3NH ¹ | • | • | • | • | • |
| C3NV ² | • | • | • | • | • |
| C3NX ¹ | • | • | • | • | • |
| C3NZ ¹ | • | • | • | • | • |
| C3RE ¹ | • | • | • | • | • |
| C3RF ² | • | • | • | • | • |
| C3TE ¹ | • | • | • | • | • |
| C3TF ¹ | • | • | • | • | • |
| C3TZ ¹ | • | • | • | • | • |
| C3VE ¹ | • | • | • | • | • |
| C3VF ¹ | • | • | • | • | • |
| C3VM ¹ | • | • | • | • | • |
| K4AE ¹ | • | • | • | • | • |
| K4AF ² | • | • | • | • | • |
| K4AY ¹ | • | • | • | • | • |
| K4BE ¹ | • | • | • | • | • |
| K4BF ² | • | • | • | • | • |
| K4CE ¹ | • | • | • | • | • |
| K4CF ² | • | • | • | • | • |
| K4N9 ¹ | • | • | • | • | • |

Frame J

| | J Frame | | | | |
|-------------------|---------|------|------|------|------|
| | S45B | S51B | S60B | S65C | S75C |
| K4NE ¹ | • | • | • | • | • |
| K4NH ¹ | • | • | • | • | • |
| K4NV ² | • | • | • | • | • |
| K4NZ ¹ | • | • | • | • | • |
| K4RE ¹ | • | • | • | • | • |
| S1AZ ¹ | • | • | • | • | • |
| S1JE ¹ | • | • | • | • | • |
| S5BE ¹ | • | • | • | • | • |
| S5RX ¹ | • | • | • | • | • |

¹ NNN Displacement limiter options only

² FFF Displacement limiter options only

| | J Frame | | | | |
|-------------------|---------|------|------|------|------|
| | S45B | S51B | S60B | S65C | S75C |
| K4EX ¹ | • | • | • | • | • |
| K4JE ¹ | • | • | • | • | • |
| K4RF ² | • | • | • | • | • |
| K4TE ¹ | • | • | • | • | • |
| K4VE ¹ | • | • | • | • | • |
| S1AE ¹ | • | • | • | • | • |
| S1AF ² | • | • | • | • | • |
| S1AY ¹ | • | • | • | • | • |
| S1BE ¹ | • | • | • | • | • |
| S1BF ² | • | • | • | • | • |
| S1CE ¹ | • | • | • | • | • |
| S1CF ² | • | • | • | • | • |
| S1DX ¹ | • | • | • | • | • |
| S1GF ² | • | • | • | • | • |
| S1N9 ¹ | • | • | • | • | • |
| S1NE ¹ | • | • | • | • | • |
| S1NH ¹ | • | • | • | • | • |
| S1NQ ¹ | • | • | • | • | • |
| S1NV ² | • | • | • | • | • |
| S1NX ¹ | • | • | • | • | • |
| S1NZ ¹ | • | • | • | • | • |
| S1RE ¹ | • | • | • | • | • |
| S1RF ² | • | • | • | • | • |
| S1TE ¹ | • | • | • | • | • |
| S1TF ² | • | • | • | • | • |
| S1VE ¹ | • | • | • | • | • |
| S1VF ¹ | • | • | • | • | • |
| T0AE ¹ | • | • | • | • | • |
| T0BE ¹ | • | • | • | • | • |
| T0BF ¹ | • | • | • | • | • |
| T0CE ¹ | • | • | • | • | • |

Frame J

| | J Frame | | | | |
|-------------------|---------|------|------|------|------|
| | S45B | S51B | S60B | S65C | S75C |
| TON9 ¹ | • | • | • | • | • |
| TONE ¹ | • | • | • | • | • |
| TONH ¹ | • | • | • | • | • |
| TONV ² | • | • | • | • | • |
| TONZ ¹ | • | • | • | • | • |
| TORE ¹ | • | • | • | • | • |
| TOTE ¹ | • | • | • | • | • |
| TOVE ¹ | • | • | • | • | • |
| TOVF ² | • | • | • | • | • |

¹ NNN Displacement limiter options only

² FFF Displacement limiter options only

K Shaft seal

| | | J Frame | | | | |
|---|----------------|---------|------|------|------|------|
| | | S45B | S51B | S60B | S65C | S75C |
| A | Single (Viton) | • | • | • | • | • |

K Mounting flange and housing port style

| | | | | | | |
|---|---|---|---|---|---|---|
| 2 | SAE-C Flange 4-bolt/SAE O-ring boss port | • | • | • | • | • |
| 8 | SAE-B Flange 2-bolt/SAE O-ring boss ports | • | • | • | • | • |
| 9 | SAE-C Flange 2-bolt/SAE O-ring boss ports | • | • | • | • | • |
| F | F SAE-C Flange 2-bolt rotated 45° SAE O-ring boss ports | • | • | • | • | • |

K Angle Sensor Housing

| | | | | | | |
|---|---------------------------------------|---|---|---|---|---|
| N | Not applicable | • | • | • | • | • |
| R | Angle Sensor Housing, Right Hand Side | • | • | • | • | • |

L Displacement limiter

| | | | | | | |
|-----|--------------------------------------|---|---|---|---|---|
| NNN | None | • | • | • | • | • |
| FFF | Adjustable, factory set at max angle | • | • | • | • | • |

M Special hardware

| | | | | | | |
|-----|-------------------------|---|---|---|---|---|
| JJJ | None | • | • | • | • | • |
| ANS | Angle Sensor Swashplate | • | • | • | • | • |

N Special features


| | | | | | | |
|-----|------|---|---|---|---|---|
| NNN | None | • | • | • | • | • |
|-----|------|---|---|---|---|---|

Frame J


Performance J45B

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].

Flow vs. speed

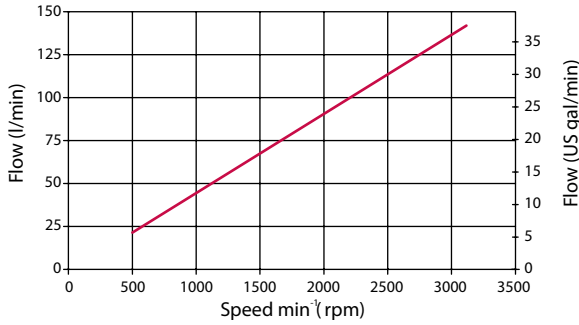


Input power vs. speed

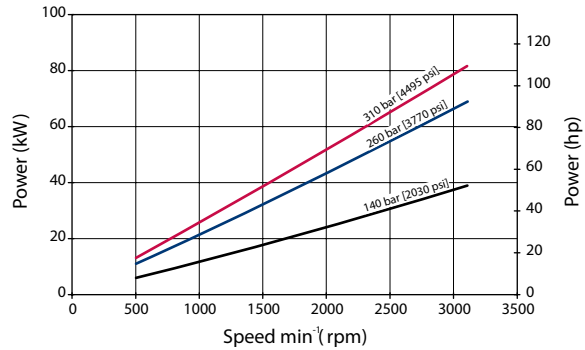


Efficiency

System Pressure: 310 Bar - Inlet Pressure: 1.0 Bar abs - Inlet Temperature: 49C

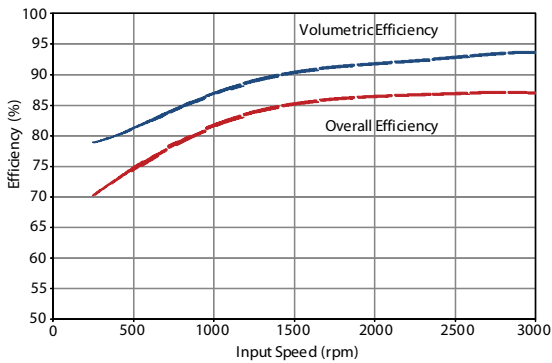


Noise

Inlet Pressure: 1.0 Bar abs - Inlet Temperature: 49C

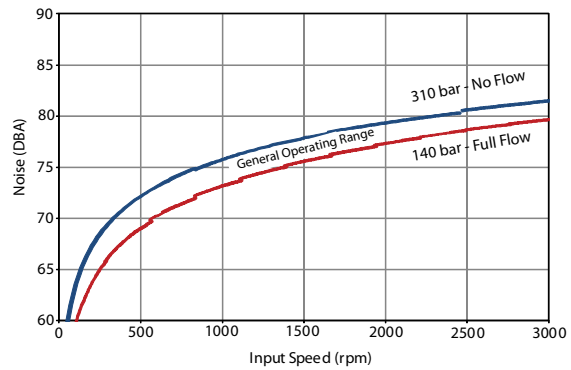

Inlet pressure vs. speed





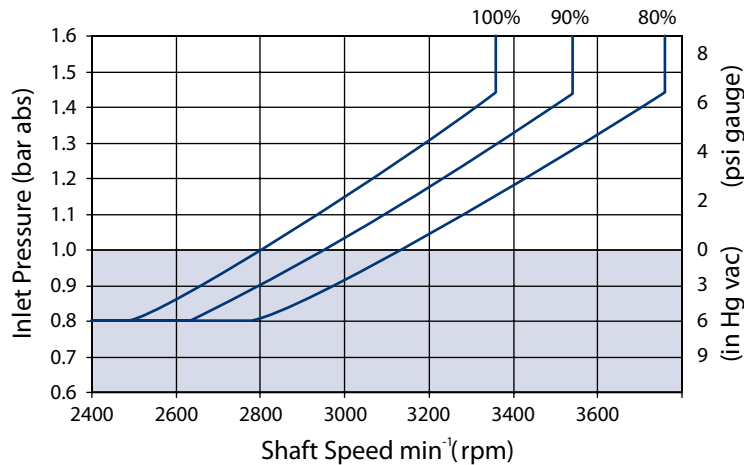


The chart above shows allowable inlet pressure and speed at various displacements. Greater speeds and lower inlet pressures are possible at reduced displacement. Operating outside of acceptable limits reduces pump life.

Frame J

Performance J51B

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].

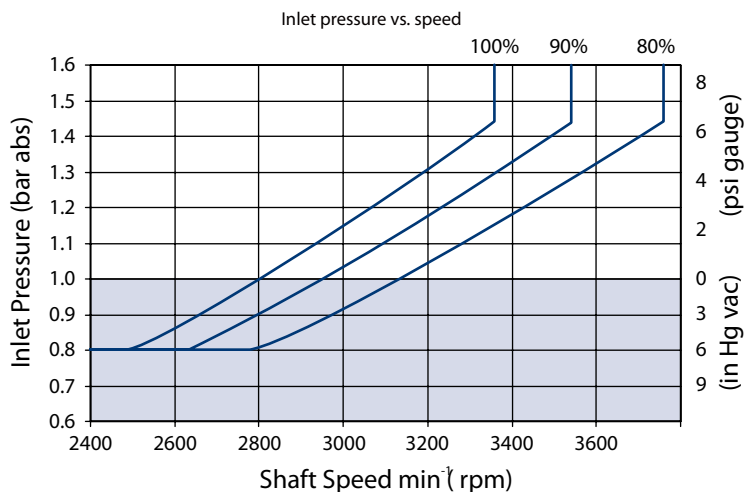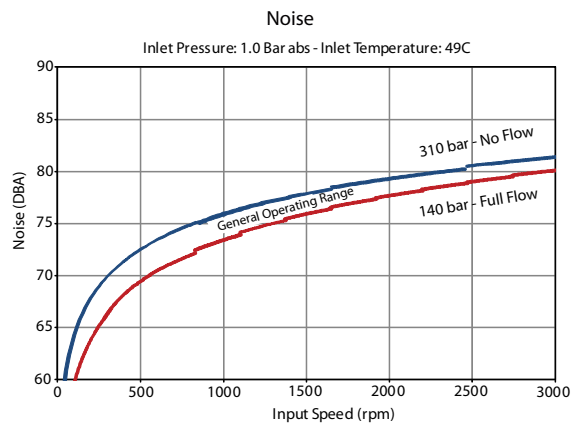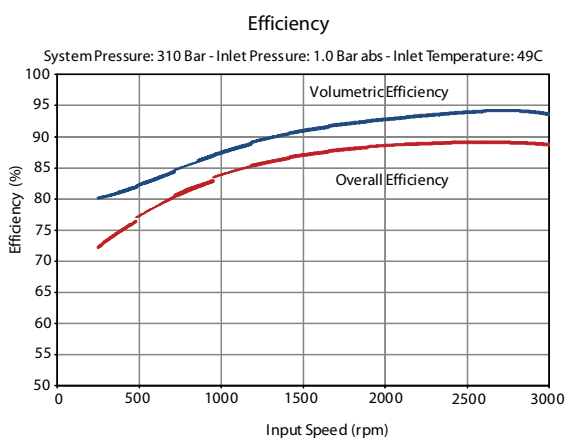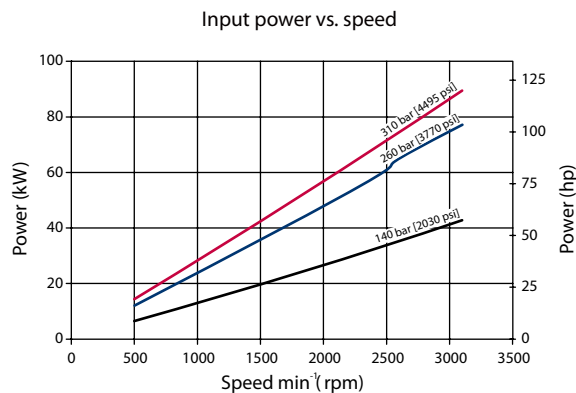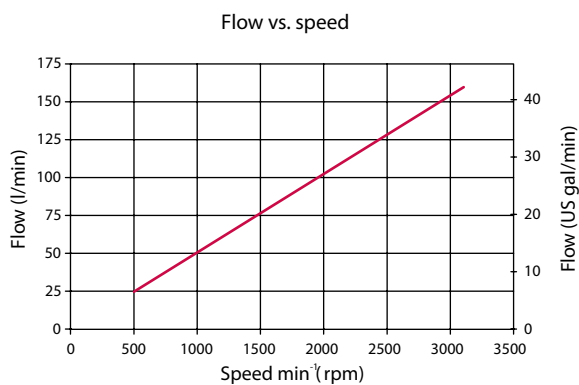


The chart above shows allowable inlet pressure and speed at various displacements. Greater speeds and lower inlet pressures are possible at reduced displacement. Operating outside of acceptable limits reduces pump life.

Frame J


Performance J60B

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].


Flow vs. speed

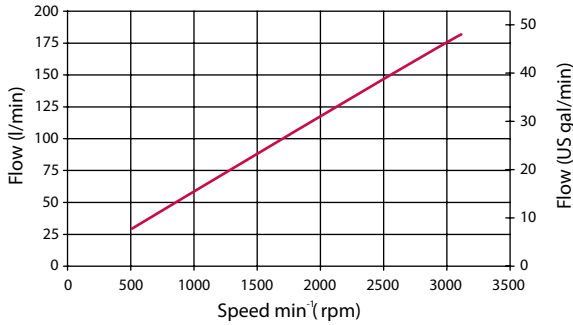


Input power vs. speed

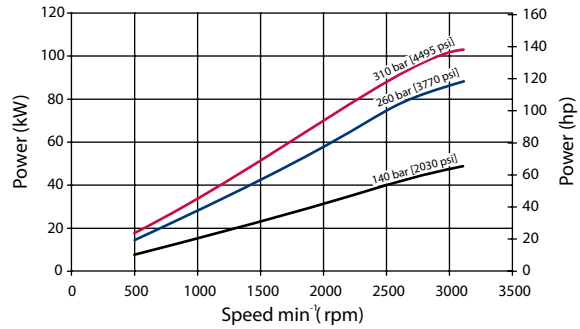


Efficiency

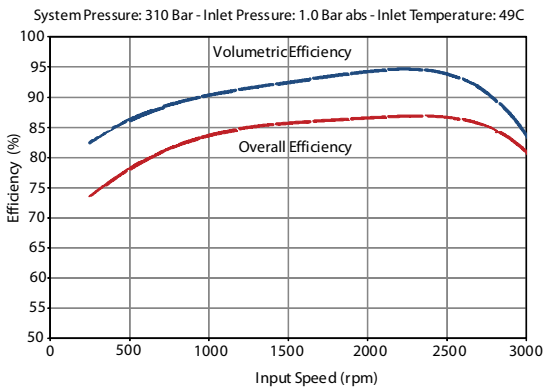

Noise

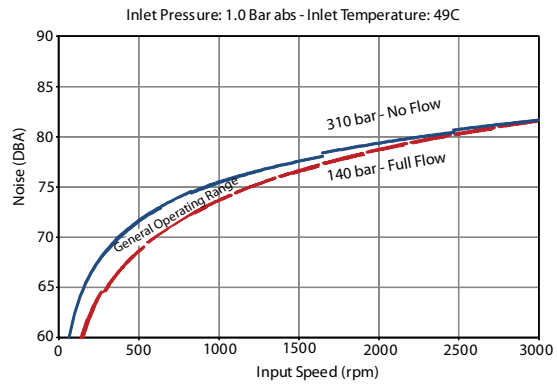

Inlet pressure vs. speed





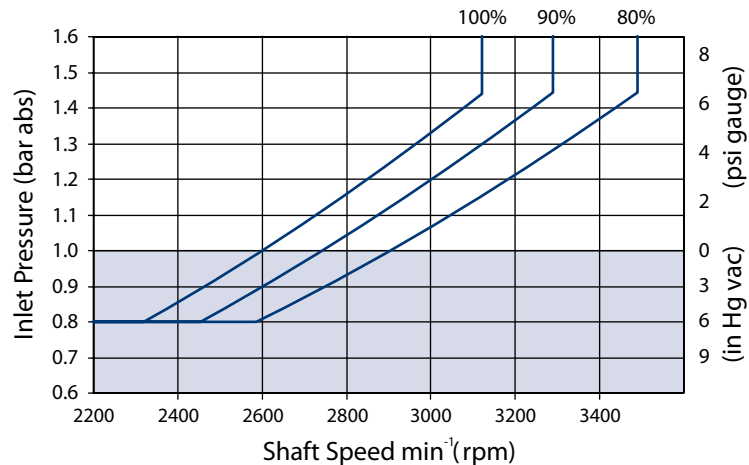


The chart above shows allowable inlet pressure and speed at various displacements. Greater speeds and lower inlet pressures are possible at reduced displacement. Operating outside of acceptable limits reduces pump life.

Frame J

Performance J65C

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].

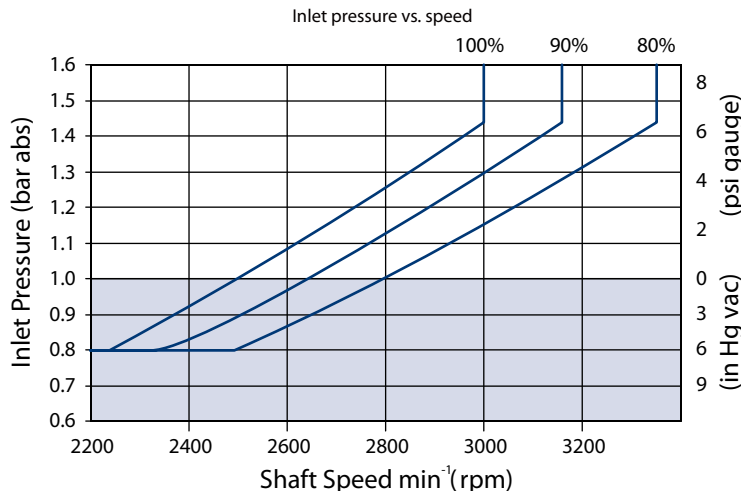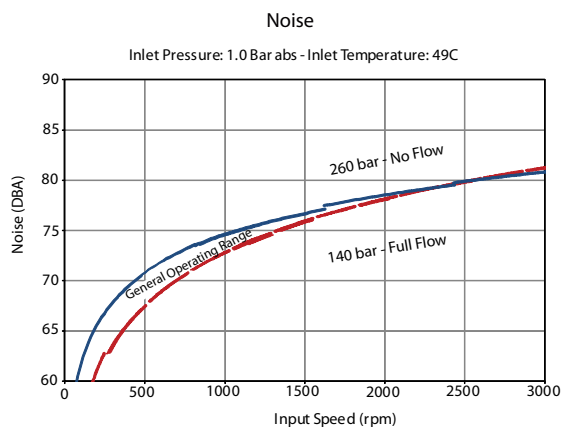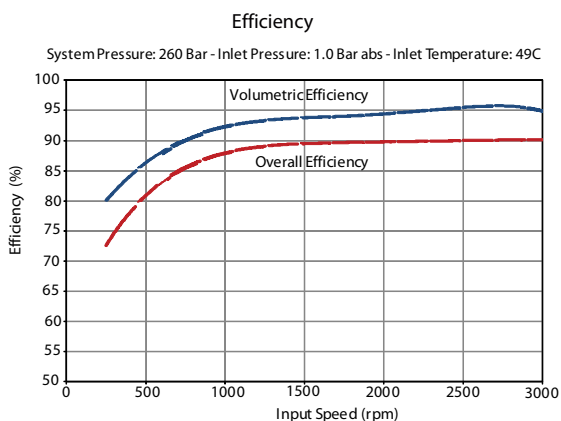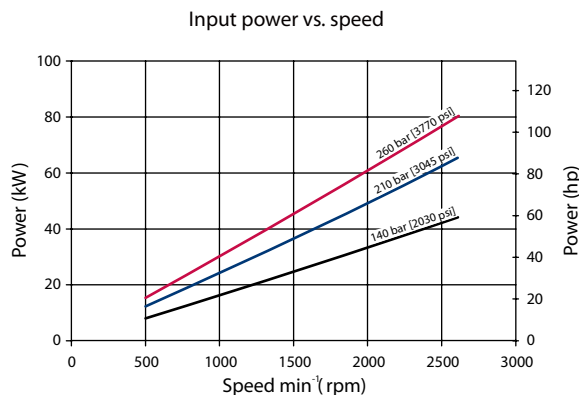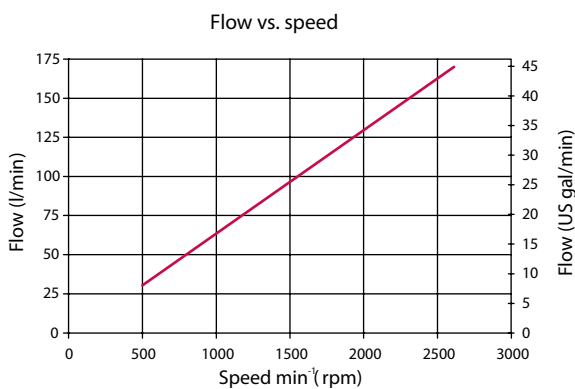


The chart above shows allowable inlet pressure and speed at various displacements. Greater speeds and lower inlet pressures are possible at reduced displacement. Operating outside of acceptable limits reduces pump life.

Frame J


Performance J75C

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].


Flow vs. speed

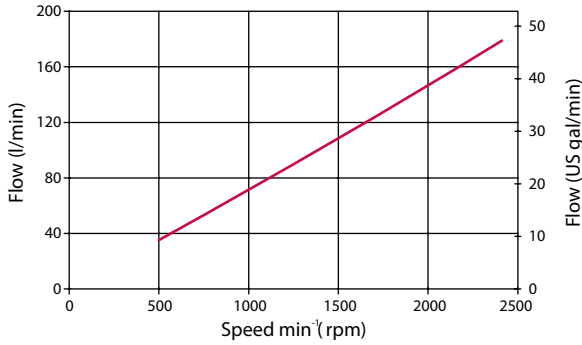


Input power vs. speed

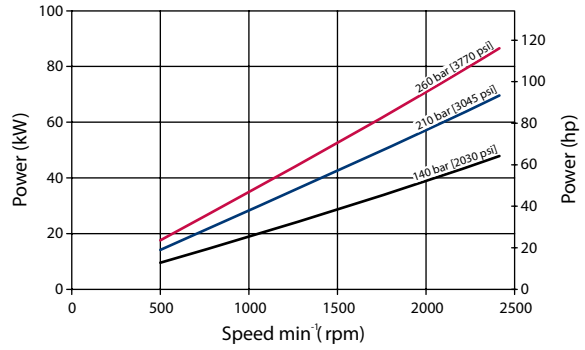


Efficiency

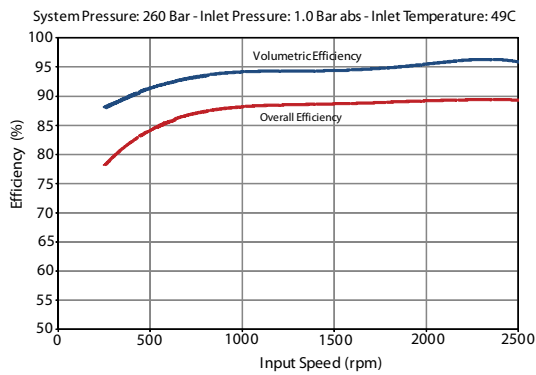

Noise

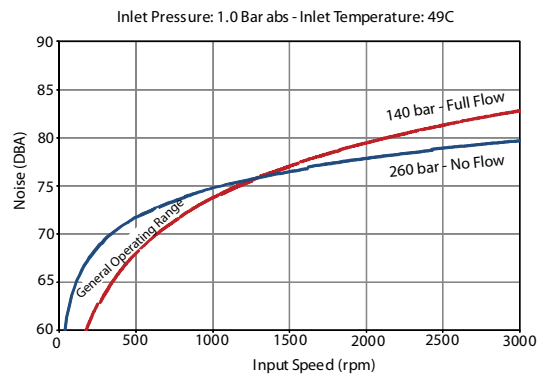

Inlet pressure vs. speed

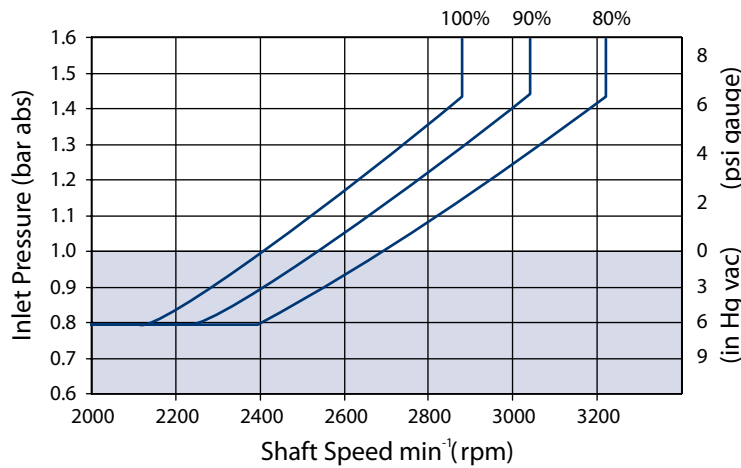

The chart above shows allowable inlet pressure and speed at various displacements. Greater speeds and lower inlet pressures are possible at reduced displacement. Operating outside of acceptable limits reduces pump life.

Frame J

Hydraulic Controls

Pressure Compensated Controls


*Response/Recovery Times**

| (msec) | Response | Recovery |
|--------|----------|----------|
| J45B | 33 | 140 |
| J51B | 33 | 150 |
| J60B | 39 | 170 |
| J65C | 45 | 140 |
| J75C | 45 | 150 |

PC Setting range

| Model | PC | BC |
|-------|--------------------------------|--------------------------------|
| J45B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| J51B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| J60B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| J65C | 100-260 bar [1450-3770 bar] | N/A |
| J75C | 100-260 bar [1450-3770 bar] | N/A |

Schematic

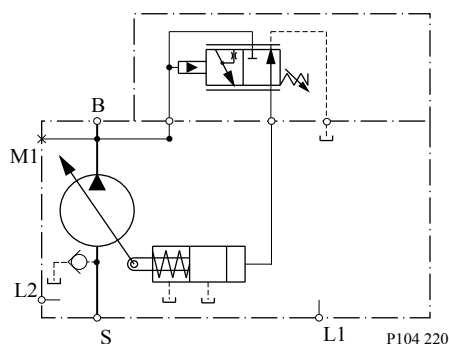

B = Outlet

S = Inlet

L1, L2 = Case drain

M1* = System pressure gauge port

* M1 port is available on axially ported endcaps only

Frame J

Remote Pressure Compensated Controls

*Response/Recovery Times**

| (msec) | Response | Recovery |
|--------|----------|----------|
| J45B | 33 | 140 |
| J51B | 33 | 150 |
| J60B | 39 | 170 |
| J65C | 45 | 140 |
| J75C | 45 | 150 |


PC Setting Range

| Model | RP | BP |
|-------|--------------------------------|--------------------------------|
| J45B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| J51B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| J60B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| J65C | 100-260 bar [1450-3770 bar] | N/A |
| J75C | 100-260 bar [1450-3770 bar] | N/A |

LS Setting range

| Model | bar | psi |
|-------|-------|---------|
| All | 10-40 | 145-580 |

Schematic

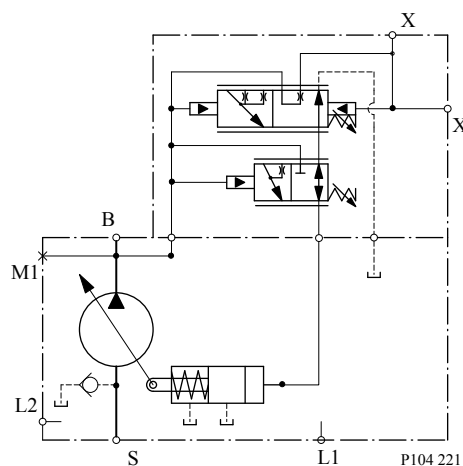

- B = Outlet
- S = Inlet
- L1, L2 = Case drain
- X = Remote PC port
- M1* = System pressure gauge port

Frame J

* M1 port is available on axially ported endcaps only

Load sensing/Pressure compensated Controls

*Response/Recovery Times**

| (msec) | Response | Recovery |
|--------|----------|----------|
| J45B | 33 | 140 |
| J51B | 33 | 150 |
| J60B | 39 | 170 |
| J65B | 45 | 140 |
| J75B | 45 | 150 |


PC control setting range

| Code | LS | BS |
|-------|--------------------------------|--------------------------------|
| J45B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| J51B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| J60B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| J65C, | 100-260 bar [1450-3770 bar] | N/A |
| J75C | 100-260 bar [1450-3770 bar] | N/A |

LS setting range

| Model | bar | psi |
|-------|-------|---------|
| All | 10-40 | 145-580 |

Schematic

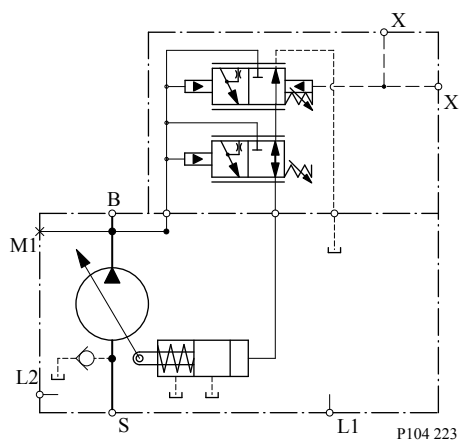

B = Outlet

S = Inlet

L1, L2 = Case drain

X = LS signal port

Frame J

M1* = System pressure gauge port

* M1 port is available on axially ported endcaps only

Load sensing Control with Bleed Orifice/ Pressure Compensated

*Response/Recovery Times**

| (msec) | Response | Recovery |
|--------|----------|----------|
| J45B | 33 | 140 |
| J51B | 33 | 150 |
| J60B | 39 | 170 |
| J65B | 45 | 140 |
| J75B | 45 | 150 |


PC control setting range

| Code | LB | BB |
|-------|--------------------------------|--------------------------------|
| J45B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| J51B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| J60B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| J65C, | 100-260 bar [1450-3770 bar] | N/A |
| J75C | 100-260 bar [1450-3770 bar] | N/A |

LS setting range

| Model | bar | psi |
|-------|-------|---------|
| All | 10-40 | 145-580 |

Schematic

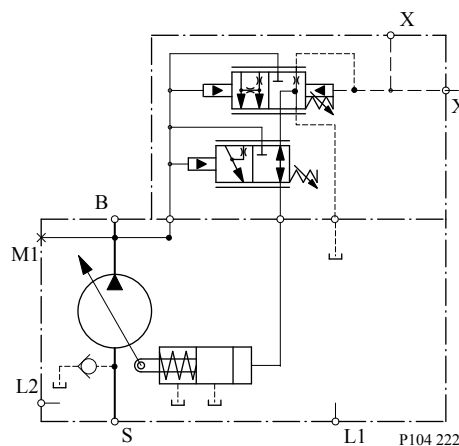

B = Outlet

S = Inlet

L1, L2 = Case drain

Frame J

X = LS signal port


M1* = System pressure gauge port

* M1 port is available on axially ported endcaps only

Electric Controls

Connectors


| Description | Quantity | Ordering Number |
|--------------------------------|----------|-------------------------|
| Mating Connector | 1 | Deutsch® DT06-2S |
| Wedge Lock | 1 | Deutsch® W25 |
| Socket Contact (16 and 18 AWG) | 2 | Deutsch® 0462-201-16141 |
| Danfoss mating connector kit | 1 | K29657 |



P003 480

Continuous Duty Operating Range

Continuous duty operating range

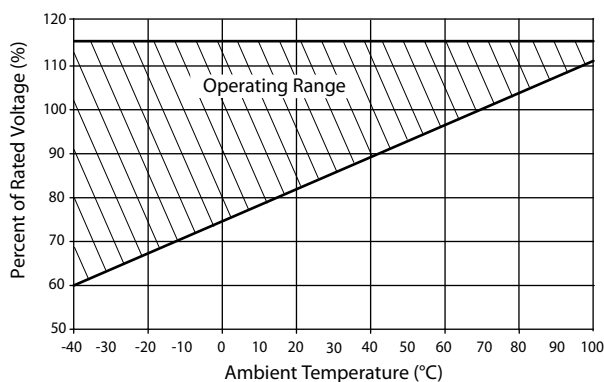

Solenoid Data - Normally Closed

| Voltage | 12V | 24V |
|---|---------|---------|
| Threshold Control [mA] (310/260 bar PC setting, oil temp X) | 200/400 | 100/200 |
| End Current [mA] (20 bar LS setting, oil temp X) | 1200 | 600 |

Solenoid Data - Normally Open

| Voltage | 12V | 24V |
|--|-----------|---------|
| Threshold Control [mA] (20 bar LS setting, oil temp X) | 0 | 0 |
| End Current [mA] (260/310 bar PC setting, oil temp X) | 1000/1100 | 500/550 |

Frame J

Hysteresis

| Frame | Hysteresis |
|------------------|--|
| J45B, J51B, J60B | Input hysteresis <4% (control current): Output hysteresis <4.5% (system pressure) |
| J65C, J75C | Input hysteresis <4% (control current): Output hysteresis <4.5% (system pressure) |

Fan Drive Control Solenoid Data - Normally Closed

| Voltage | 12V | 24V |
|------------------------------|------|-----|
| Maximum Control Current [mA] | 1800 | 920 |


Normally Closed Electric On/Off with Pressure Compensation Controls

Response/Recovery times (without servo control orifice)

| (msec) | Response | Recovery |
|--------|----------|----------|
| J45B | 33 | 140 |
| J51B | 33 | 150 |
| J60B | 39 | 170 |
| J65C | 45 | 140 |
| J75C | 45 | 150 |

For fan-drive systems, and systems with motors, select an LS setting no less than 15 bar to enhance system stability. As the LS setting is reduced, the risk for system instability may be increased. A 20 bar LS setting is recommended as a starting point for all new applications.

Schematic

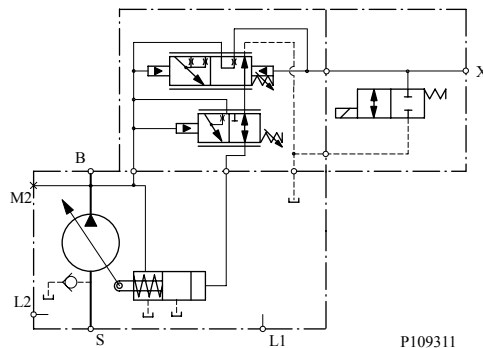

- B = Outlet
- S = Inlet
- L1, L2 = Case drain
- M2 = System pressure gauge port
- X = Load Sense Port

LS setting range

| Model | bar | psi |
|-------|---------|-------------|
| All | 10 - 40 | [145 - 580] |

Frame J

PC setting range

| Frame | AG, AR (12V) | BE, BR (12V) | AY, CR (24V) | BG, DR (24V) |
|-------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| J45B | 100-280 bar [1450-4060] psi | 290-310 bar [4205-4495] psi | 100-280 bar [1450-4060] psi | 290-310 bar [4205-4495] psi |
| J51B | | | | |
| J60B | | | | |
| J65C | 100-260 bar [1450-3770] psi | Not Available | 100-260 bar [1450-3770] psi | Not Available |
| J75C | | | | |

Normally Open Electric On/Off with Pressure Compensation Controls


*Response/Recovery times**

| (msec) | Response | Recovery |
|--------|----------|----------|
| J45B | 33 | 140 |
| J51B | 33 | 150 |
| J60B | 39 | 170 |
| J65C | 45 | 140 |
| J75C | 45 | 150 |

* Without servo control orifice

For fan-drive systems, and systems with motors, select an LS setting no less than 15 bar to enhance system stability. As the LS setting is reduced, the risk for system instability may be increased. A 20 bar LS setting is recommended as a starting point for all new applications.

Schematic

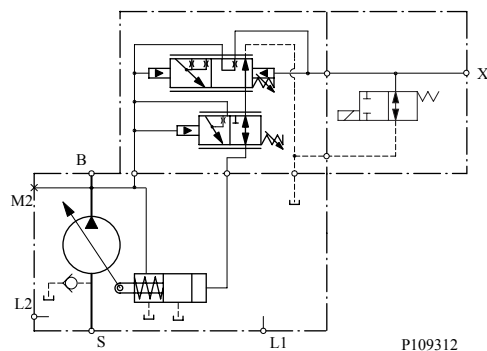

- B = Outlet
- S = Inlet
- L1, L2 = Case drain
- M2 = System pressure gauge port
- X = Load Sense Port

LS setting range

| Model | bar | psi |
|-------|---------|-------------|
| All | 10 - 40 | [145 - 580] |

Frame J

PC setting range

| Frame | AF, AN (12V) | BF, BN (12V) | AT, CN (24V) | DF, DN (24V) |
|-------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| J45B | 100-280 bar [1450-4060] psi | 290-310 bar [4205-4495] psi | 100-280 bar [1450-4060] psi | 290-310 bar [4205-4495] psi |
| J51B | | | | |
| J60B | | | | |
| J65C | 100-260 bar [1450-3770] psi | Not Available | 100-260 bar [1450-3770] psi | Not Available |
| J75C | | | | |

Normally Closed Electric Proportional with Pressure Compensation Controls


Response/Recovery times

| (msec) | 0.8mm Orifice | | 1.0mm Orifice | |
|--------|---------------|----------|---------------|----------|
| | Response | Recovery | Response | Recovery |
| J45B | 33 | 425 | 33 | 325 |
| J51B | 33 | 455 | 33 | 325 |
| J60B | 39 | 515 | 39 | 395 |
| J65C | 45 | 425 | 45 | 325 |
| J75C | 45 | 455 | 45 | 350 |

LS setting range

| Model | bar | psi |
|-------|---------|-------------|
| All | 10 - 40 | [145 - 580] |

Schematic

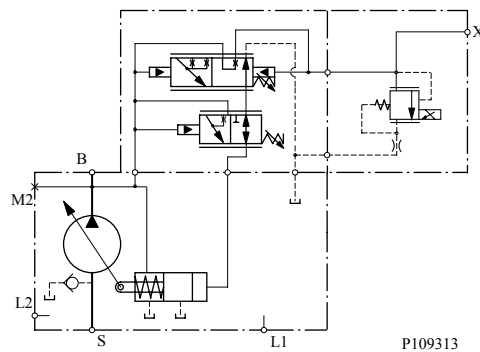

- B = Outlet
- S = Inlet
- L1, L2 = Case drain
- M2 = System pressure gauge port
- X = Load Sense Port

Frame J


PC setting range

| Frame | AH, AV (12V) | BH, BM (12V) | AK, AL (24V) | BK, BL (24V) |
|-------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| J45B | 100-280 bar [1450-4060] psi | 290-310 bar [4205-4495] psi | 100-280 bar [1450-4060] psi | 290-310 bar [4205-4495] psi |
| J51B | | | | |
| J60B | | | | |
| J65C | 100-260 bar [1450-3770] psi | Not Available | 100-260 bar [1450-3770] psi | Not Available |
| J75C | | | | |

For fan-drive systems, and systems with motors, select an LS setting no less than 15 bar to enhance system stability. As the LS setting is reduced, the risk for system instability may be increased. A 20 bar LS setting is recommended as a starting point for all new applications.

Electric proportional controls have a unique relationship between margin (LS) setting and low pressure standby. See the graph below for this relationship.

Frames E, F, J Electric Proportional Control Low Pressure Standby

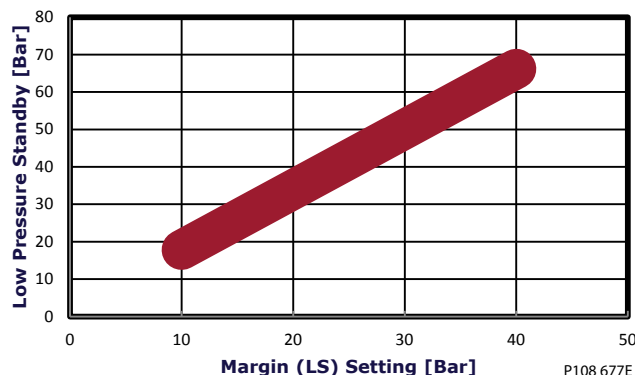

Normally Open Electric Proportional with Pressure Compensation Controls

Response/Recovery times


| (msec) | 0.8mm Orifice | | 1.0mm Orifice | |
|--------|---------------|----------|---------------|----------|
| | Response | Recovery | Response | Recovery |
| J45B | 33 | 425 | 33 | 325 |
| J51B | 33 | 455 | 33 | 325 |
| J60B | 39 | 515 | 39 | 395 |
| J65C | 45 | 425 | 45 | 325 |
| J75C | 45 | 455 | 45 | 350 |

LS setting range

| Model | bar | psi |
|-------|---------|-------------|
| All | 10 - 40 | [145 - 580] |

Frame J

Schematic

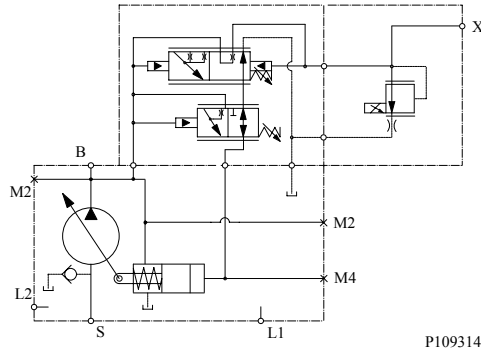

- B = Outlet
- S = Inlet
- L1, L2 = Case drain
- M2 = System pressure gauge port
- X = Load Sense Port


PC setting range

| Frame | AW, AX (12V) | BW, BX (12V) | CK, CL (24V) | DK, DL (24V) |
|-------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| J45B | 100-280 bar [1450-4060] psi | 290-310 bar [4205-4495] psi | 100-280 bar [1450-4060] psi | 290-310 bar [4205-4495] psi |
| J51B | | | | |
| J60B | | | | |
| J65C | 100-260 bar [1450-3770] psi | Not Available | 100-260 bar [1450-3770] psi | Not Available |
| J75C | | | | |

For fan-drive systems, and systems with motors, select an LS setting no less than 15 bar to enhance system stability. As the LS setting is reduced, the risk for system instability may be increased. A 20 bar LS setting is recommended as a starting point for all new applications.

Electric proportional controls have a unique relationship between margin (LS) setting and low pressure standby. See the graph below for this relationship.

**Frames E, F, J Electric Proportional Control
 Low Pressure Standby**

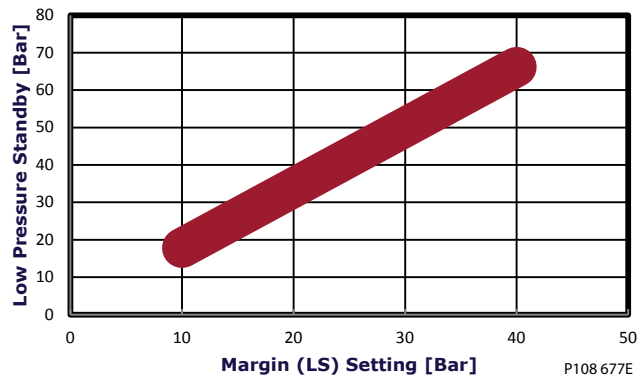


Frame J

Normally Closed Electric Torque Limiting Control with Pressure Compensation Controls

Response/Recovery Times*

| (msec) | Response | Recovery |
|--------|----------|----------|
| J45B | 33 | 140 |
| J51B | 33 | 150 |
| J60B | 39 | 170 |
| J65C | 45 | 140 |
| J75C | 45 | 150 |

Pin location



P200 151

Pinout

| Pin | Description |
|-----|------------------------------------|
| 1 | Supply - |
| 2 | Output signal 2 - Secondary Signal |
| 3 | Output signal 1 - Primary Signal |
| 4 | Supply + |

PC setting range

| Frame | TA, TE (12V) | TC, TG (12V) | TB, TF (24V) | TD, TH (24V) |
|-------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| J45B | 100-280 bar [1450-4060] psi | 290-310 bar [4205-4495] psi | 100-280 bar [1450-4060] psi | 290-310 bar [4205-4495] psi |
| J51B | | | | |
| J60B | | | | |
| J65C | 100-260 bar [1450-3770] psi | Not Available | 100-260 bar [1450-3770] psi | Not Available |
| J75C | | | | |


LS setting range

| Model | bar | psi |
|-------|---------|-------------|
| All | 10 - 40 | [145 - 580] |

For fan-drive systems, and systems with motors, select an LS setting no less than 15 bar to enhance system stability. As the LS setting is reduced, the risk for system instability may be increased. A 20 bar LS setting is recommended as a starting point for all new applications.

Frame J

J-frame pump with integrated ETL control

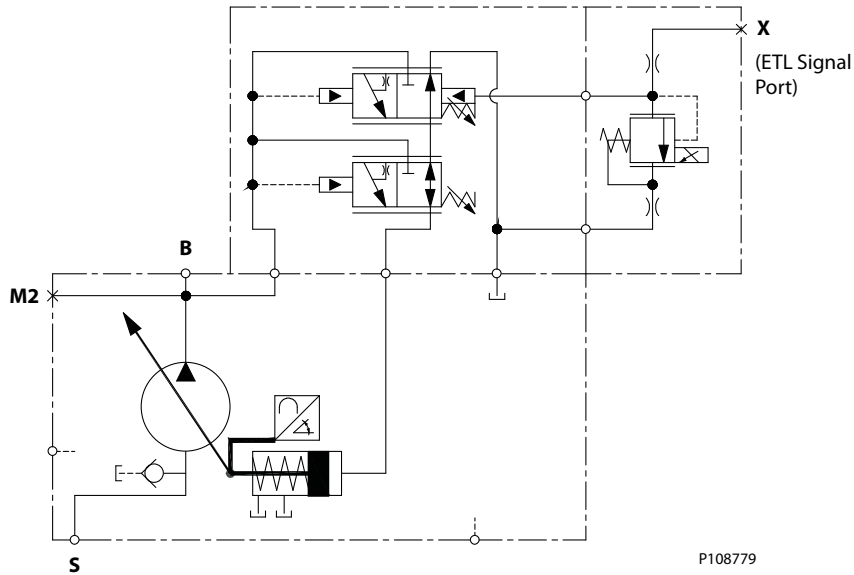


Normally Closed Fan Drive Control

PC setting range

| Frame | SA, SE (12V) | SC, SG (12V) | SB, SF (24V) | SD, SH (24V) |
|-------|-------------------------|-------------------------|-------------------------|-------------------------|
| J45B | 100-210 bar [1450-3045] | 220-310 bar [3190-4495] | 100-210 bar [1450-3045] | 220-310 bar [3190-4495] |
| J51B | psi | psi | psi | psi |
| J60B | | | | |
| J65C | 100-210 bar [1450-3045] | 220-260 bar [3190-3771] | 100-210 bar [1450-3045] | 220-260 bar [3190-3771] |
| J75C | psi | psii | psi | psii |

Fan Drive Control Schematic

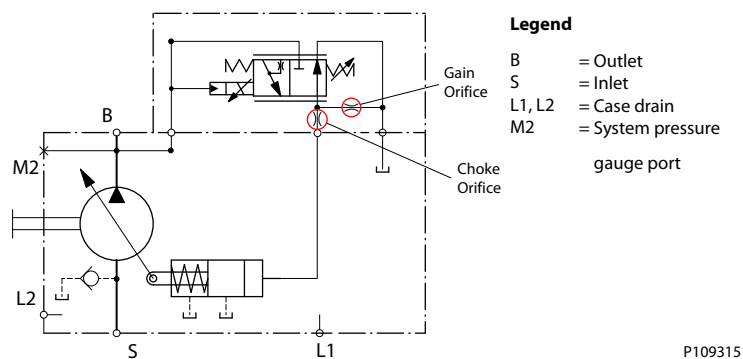

Legend

- B = Outlet
- S = Inlet
- L1, L2 = Case drain
- M2 = System pressure gauge port

Frame J

Input shafts

| Code | Description | Maximum torque rating ¹ N·m [lbf·in] | Drawing |
|------|---|--|---------|
| C2 | 13 tooth spline 16/32 pitch (ANSI B92.1B 1996 - Class 6e) For use with SAE-B | 288 [2546] | |
| C3 | 15 tooth spline 16/32 pitch (ANSI B92.1B 1996 - Class 6e) For use with SAE-B | 404 [3575] | |

1. See [Input shaft torque ratings](#) for an explanation of maximum torque.

Frame J

| Code | Description | Maximum torque rating ¹ N·m [lbf·in] | Drawing |
|------|---|--|---------|
| S1 | 14 tooth spline 12/24 pitch (ANSI B92.1B 1996 - Class 6e) | 800 [7080] | |
| S5 | 14 tooth spline 12/24 pitch (BNSI A92.1B 1996 - Class 6e) | 800 [7080] | |

1. See [Input shaft torque ratings](#) for an explanation of maximum torque.

Frame J


| Code | Description | Maximum torque rating ¹ N·m [lbf·in] | Drawing |
|------|--------------------------------------|--|---------|
| K4 | Ø 31.75 mm [1.25 in] straight key | 655 [5797] | |
| TO | Ø 31.75 mm [1.25 in] 1:8 taper | 734 [6495] | |

1. See [Input shaft torque ratings](#) for an explanation of maximum torque.

Frame J


Installation drawings

Axial Ported Endcap

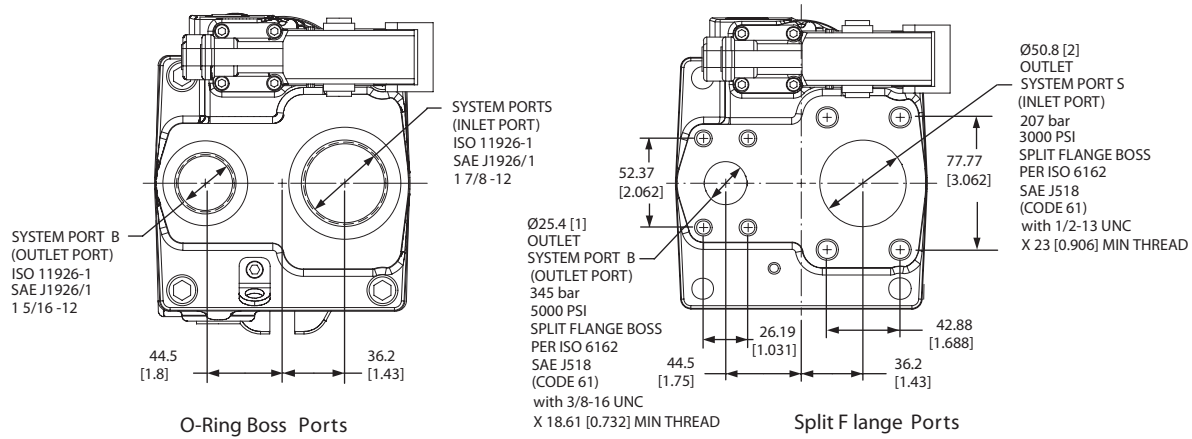


Frame J

Axial Ported Endcap Installation Dimensions

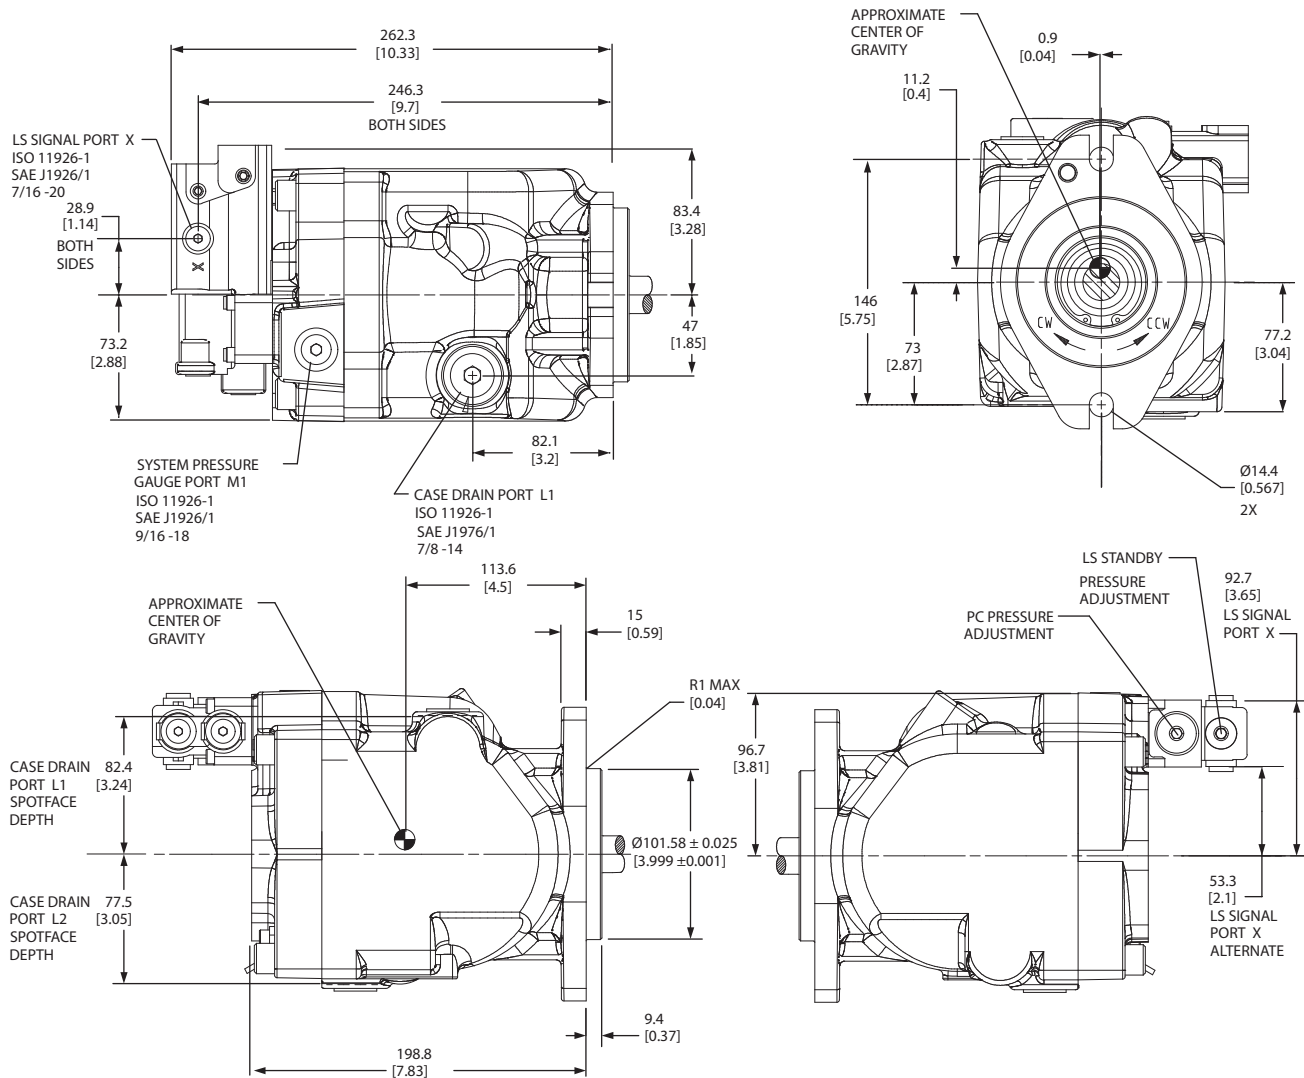


Frame J

Right Fan Drive Control

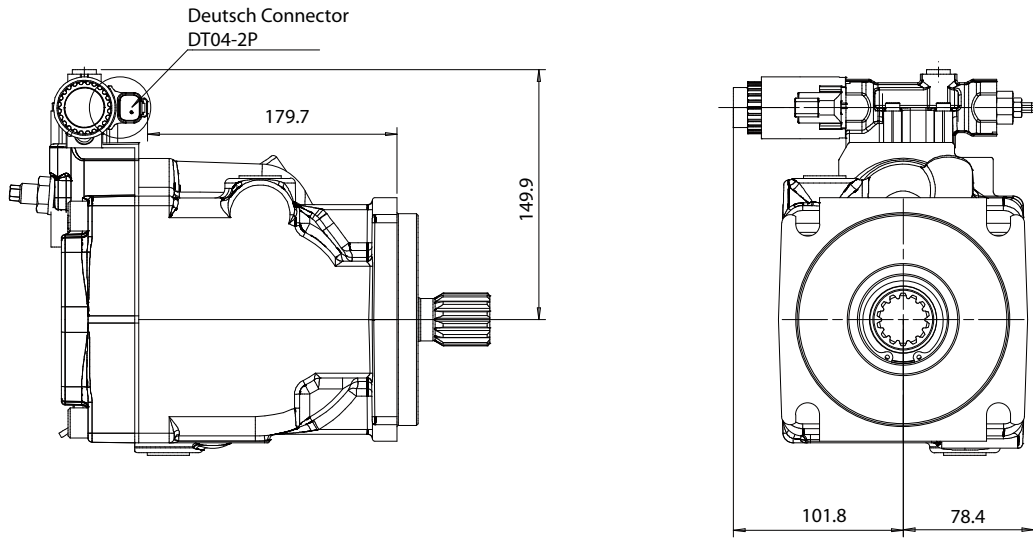

P109023

Radial Ported Endcap Split Flange Ports

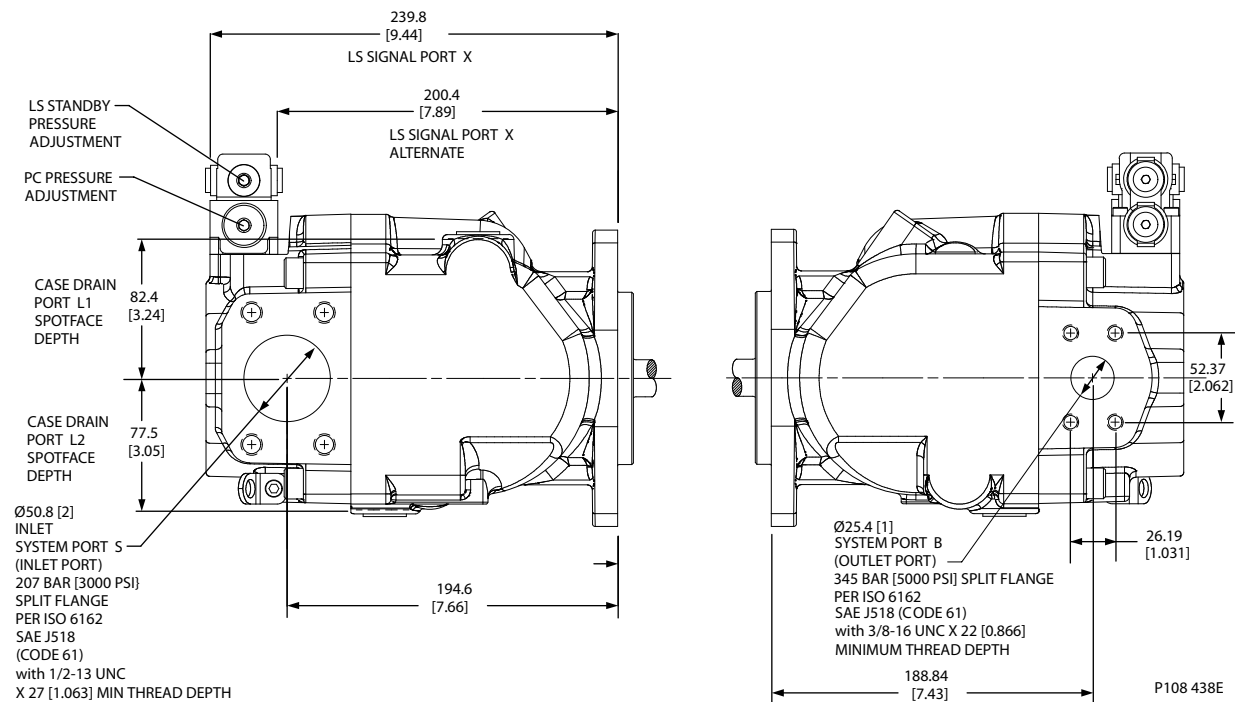


P108 438E

Frame J

Radial Ported Endcap Rear View


Radial ported endcap rear view

* Interference with internal components will occur
 if fitting depth in port X is greater than 11.8 mm [0.465 in]

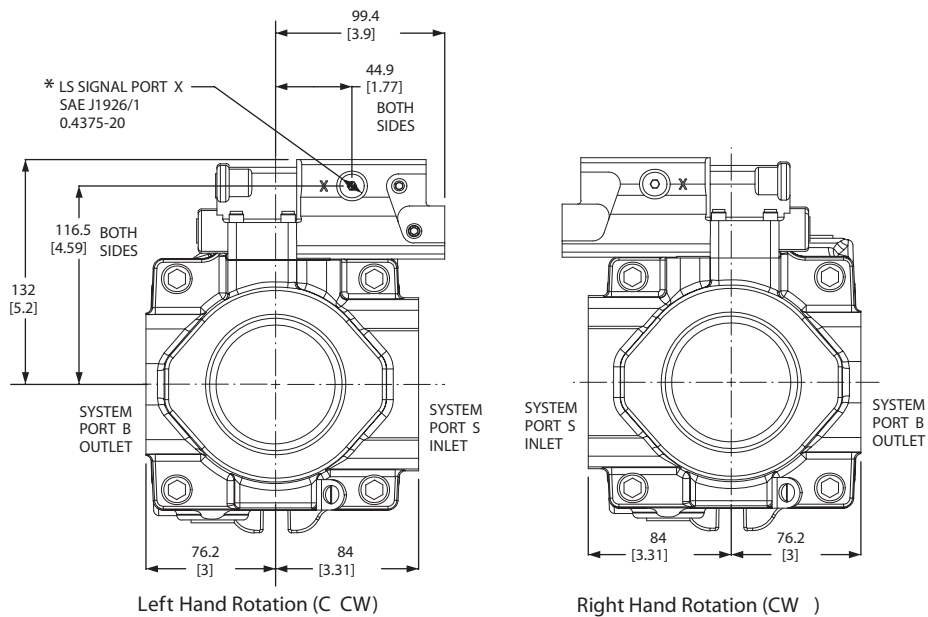

Frame J


Radial Ported Endcap Installation Dimensions

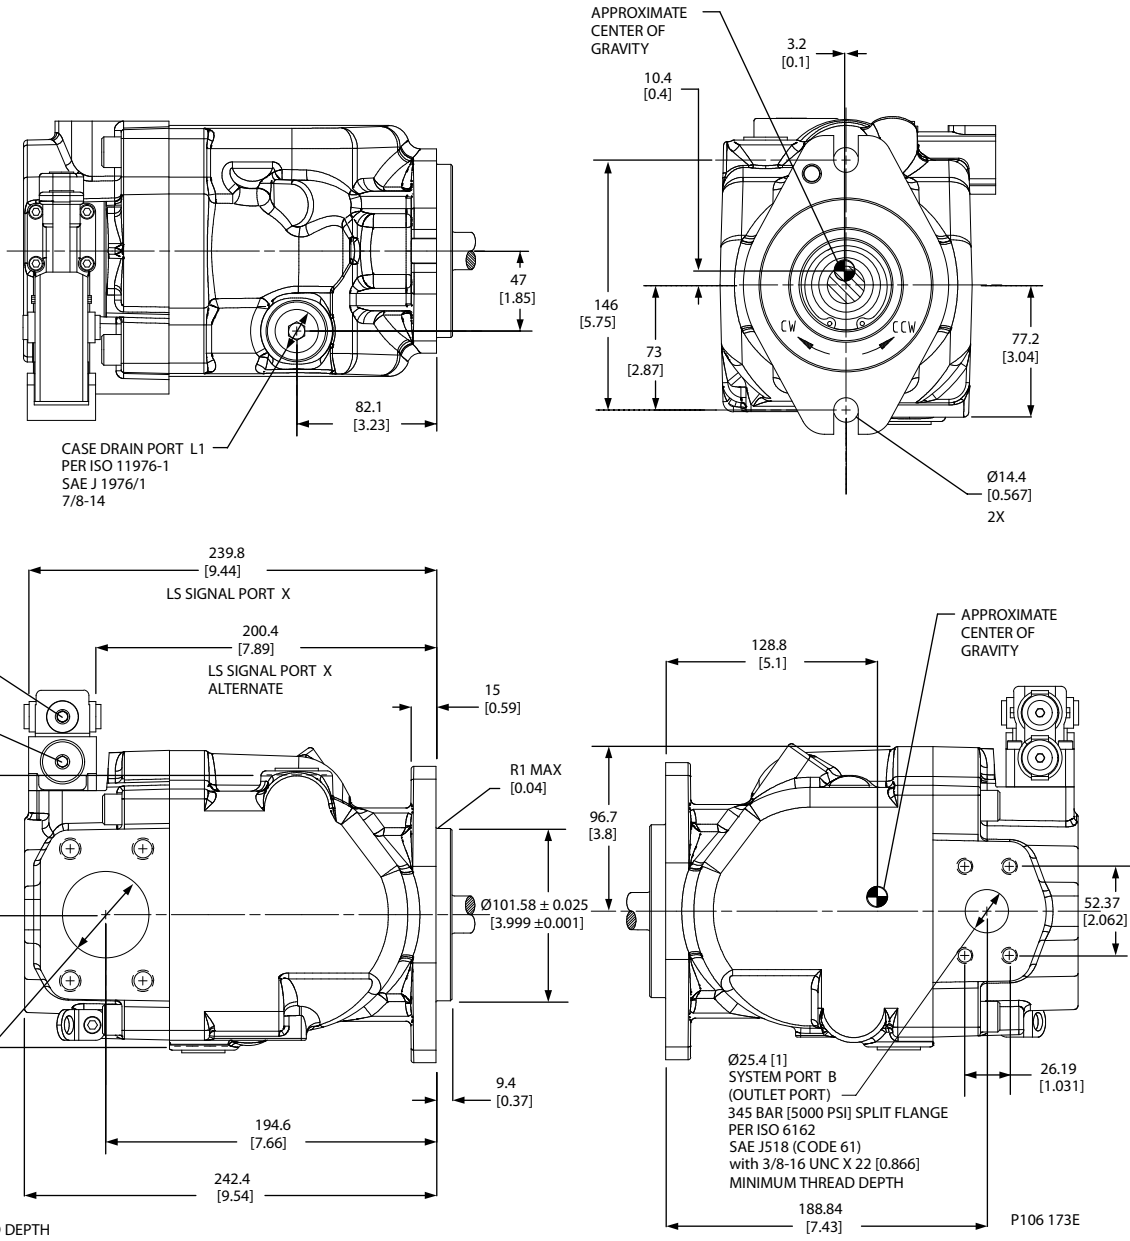

Frame J


Right Angle Sensor Position Installation Dimensions

SAE-C 4 Bolt

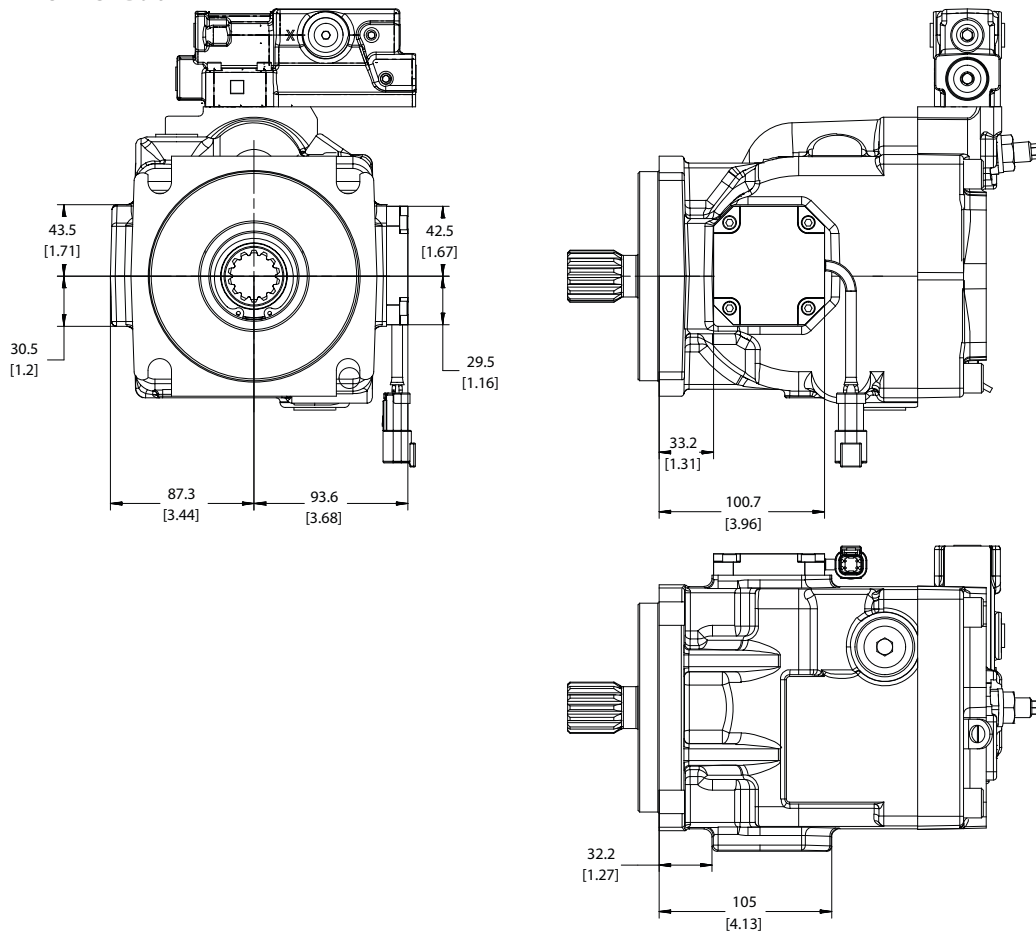

SAE-C 2 Bolt - rotated 45°


NOTE: Available only with angle sensor

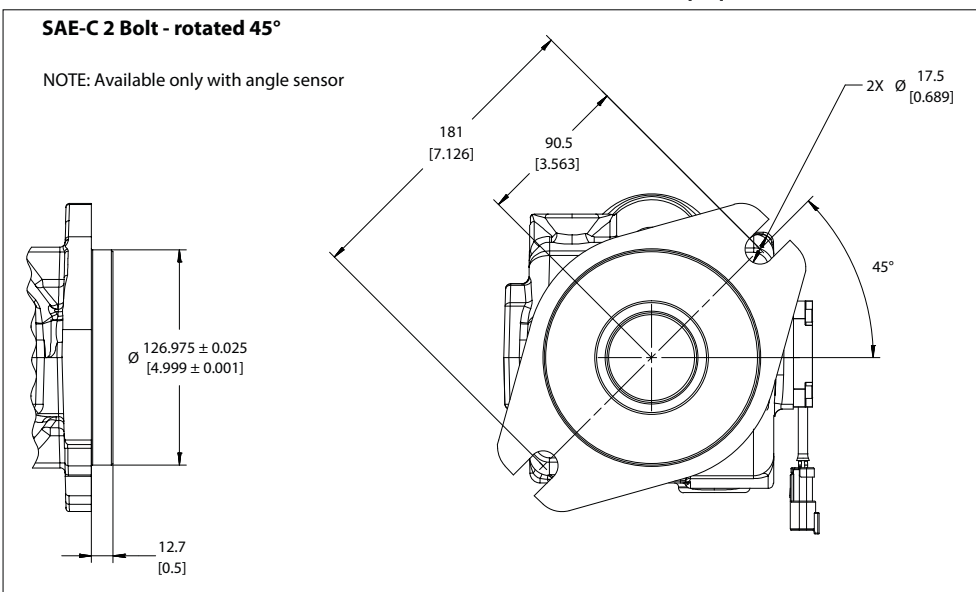


P108780

Frame J


Front Mounting Flange

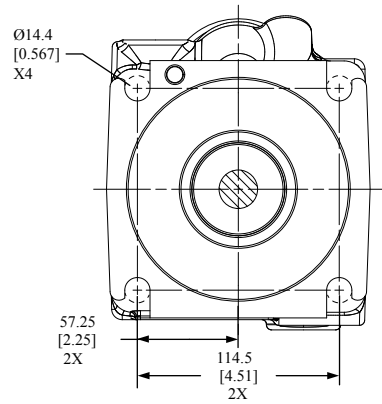

SAE-C 4 Bolt

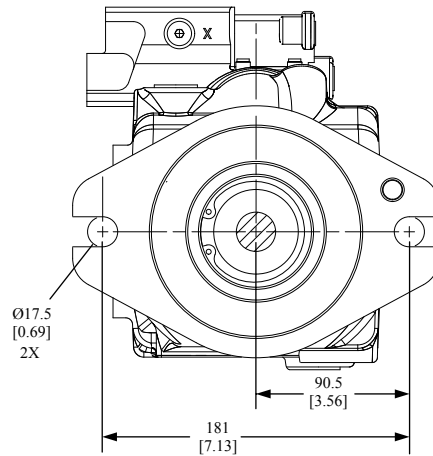

SAE-C 2 Bolt

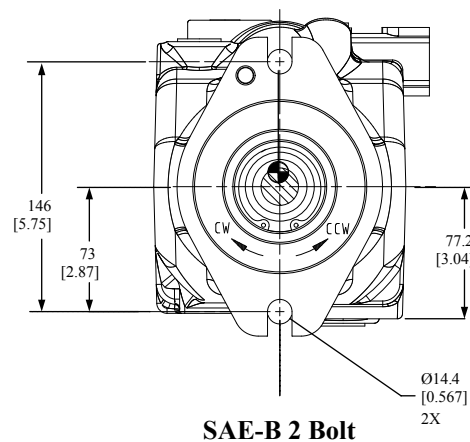

SAE-B 2 Bolt


P108 440E

Frame J

Auxiliary mounting pads

SAE-A auxiliary mounting pad (integrated)

Dimensions

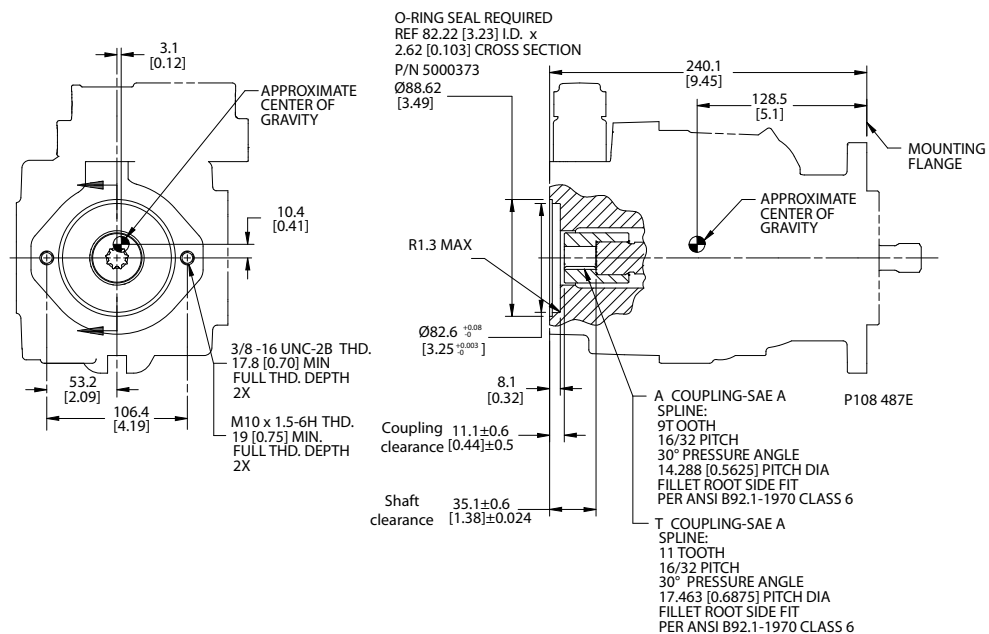


Specifications

| Coupling | 9-tooth | 11-tooth |
|---------------------------|----------------------|-----------------------|
| Spline minimum engagement | 13.5 mm [0.53 in] | 15 mm [0.59 in] |
| Maximum torque | 107 N·m [950 lbf·in] | 147 N·m [1300 lbf·in] |

Frame J

SAE-A auxiliary mounting pad (non-integral)

Dimensions

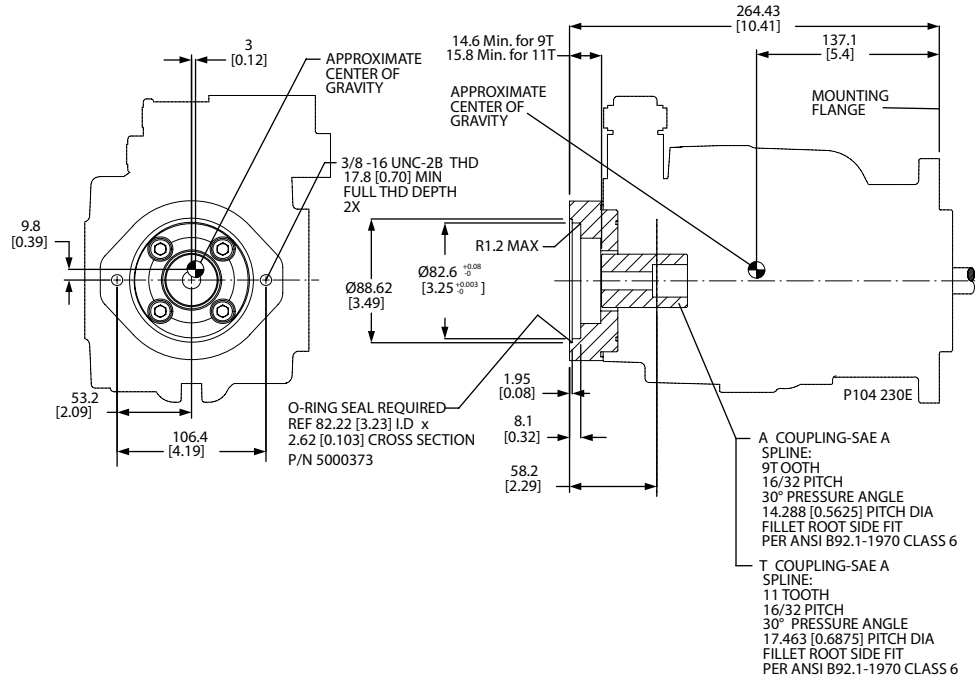


Specifications

| Coupling | 9-tooth | 11-tooth |
|---------------------------|----------------------|-----------------------|
| Spline minimum engagement | 13.5 mm [0.53 in] | 15 mm [0.59 in] |
| Maximum torque | 107 N•m [950 lbf•in] | 147 N•m [1300 lbf•in] |

Frame J

SAE-B auxiliary mounting pad

Dimensions

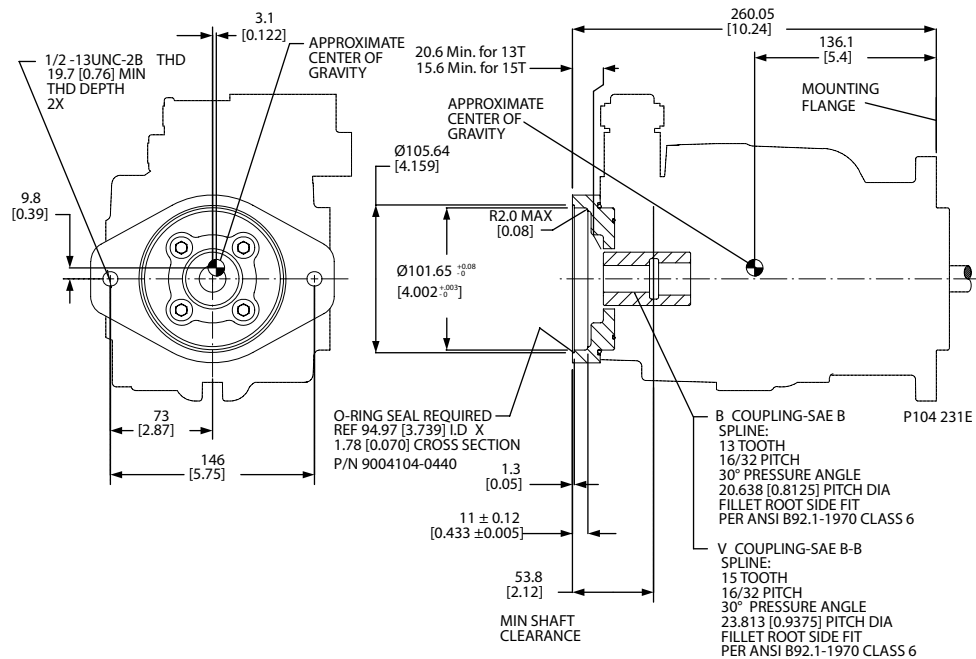


Specifications

| Coupling | 13-tooth | 15-tooth |
|---------------------------|-----------------------|-----------------------|
| Spline minimum engagement | 14.2 mm [0.56 in] | 18.9 mm [0.74 in] |
| Maximum torque | 249 N·m [2200 lbf·in] | 339 N·m [3000 lbf·in] |

SAE-C auxiliary mounting pad

Dimensions

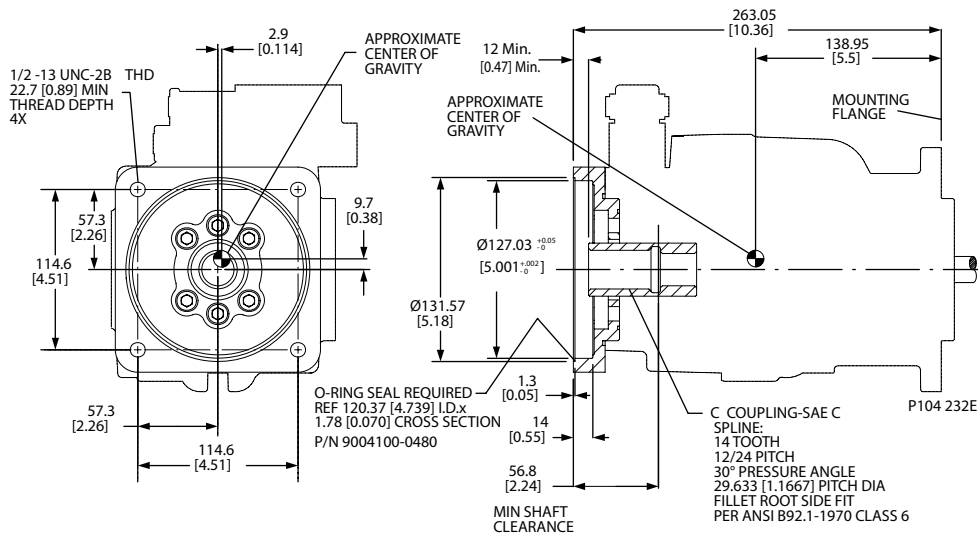


Frame J

Specifications


| | |
|---------------------------|-----------------------|
| Coupling | 14-tooth |
| Spline minimum engagement | 18.3 mm [0.72 in] |
| Maximum torque | 339 N·m [3000 lbf·in] |

Running cover

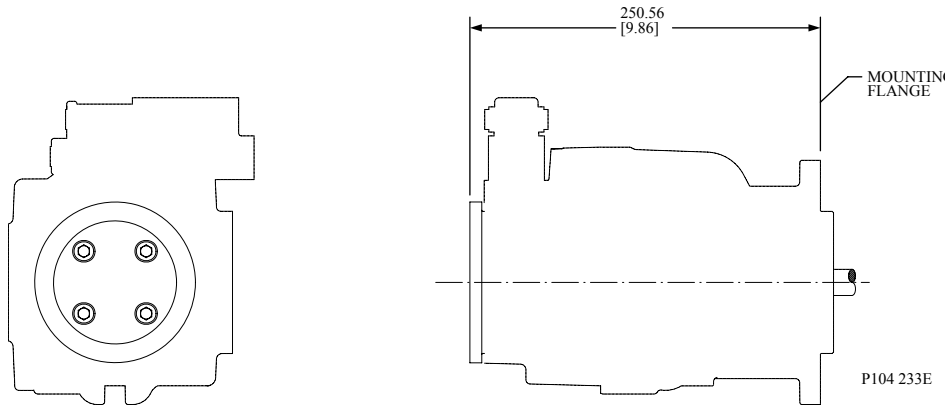


Radial Endcap Clockwise

Radial endcap counterclockwise

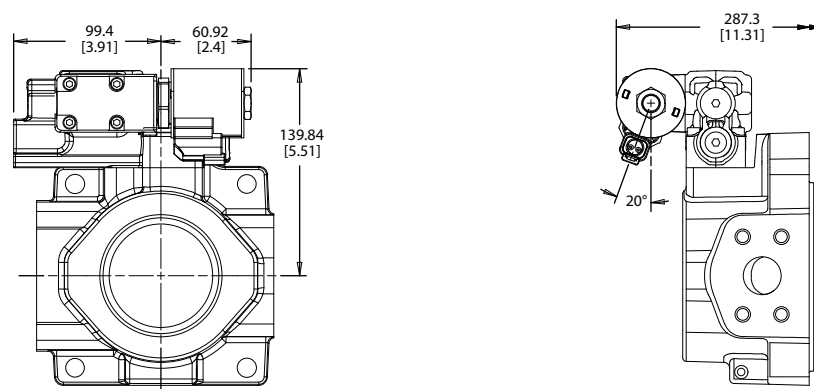


Frame J

Radial Endcap Counterclockwise

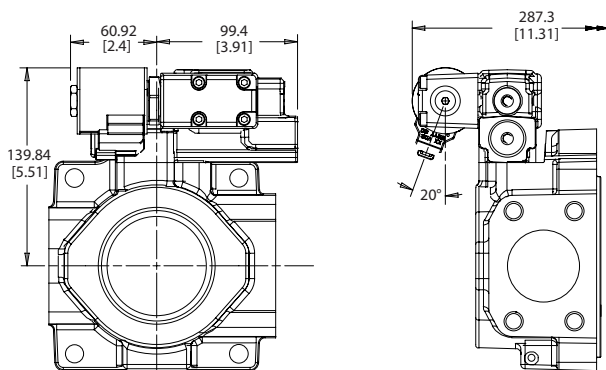


Axial Endcap Clockwise

Axial endcap clockwise

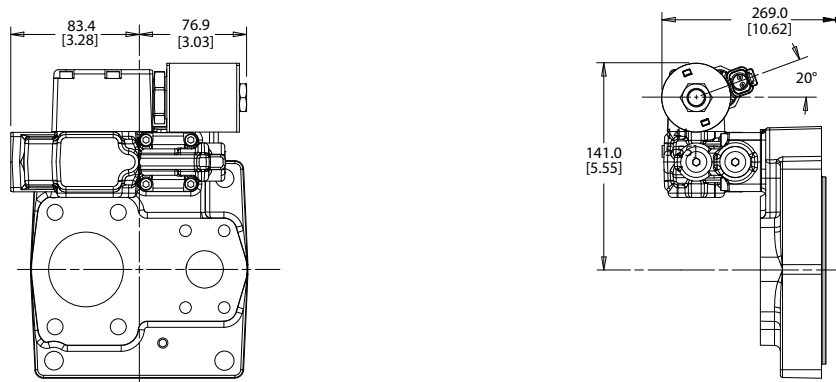

Axial Endcap Counterclockwise

Axial endcap counterclockwise

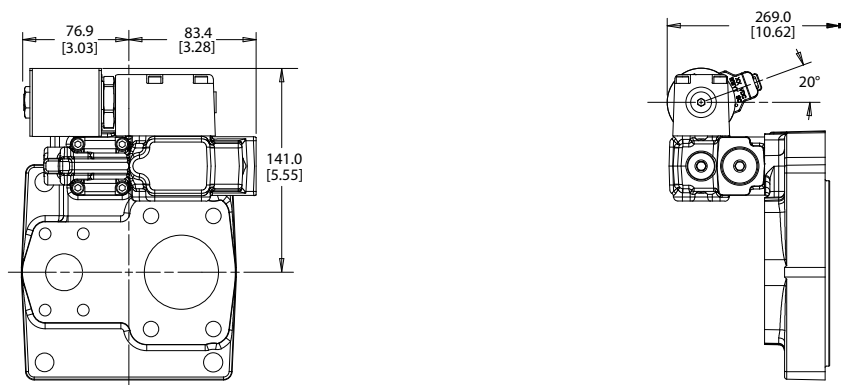

Frame J

Displacement limiter

J Frame open circuit pumps are available with an optional adjustable displacement limiter. This adjustable stop limits the pump's maximum displacement.


Setting range

| | |
|------|--|
| J45B | 8.4 to 45 cm ³ [0.51 to 2.75 in ³] |
| J51B | 13.7 to 51 cm ³ [0.84 to 3.11 in ³] |
| J60B | 16.8 to 60 cm ³ [1.03 to 3.66 in ³] |
| J65B | 25.4 to 65 cm ³ [1.55 to 3.97 in ³] |
| J75B | 28.4 to 75 cm ³ [1.73 to 4.58 in ³] |


Displacement per turn

| | |
|------|--|
| J45B | 6.2 cm ³ /rev [0.38 in ³ /rev] |
| J51B | 6.2 cm ³ /rev [0.38 in ³ /rev] |
| J60B | 6.2 cm ³ /rev [0.38 in ³ /rev] |
| J65B | 7.2 cm ³ /rev [0.44 in ³ /rev] |
| J75B | 7.2 cm ³ /rev [0.44 in ³ /rev] |

Displacement limiter cross-section



Displacement limiters are only available for endcap options V and W.

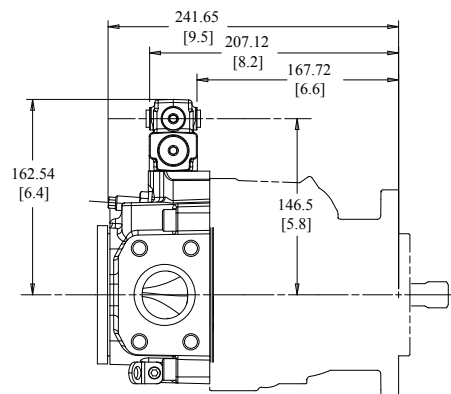

P106 728E




Frame F

Design

Series 45 Frame F pumps have a single servo piston design with a cradle-type swashplate set in polymer-coated journal bearings. A bias spring and internal forces increase swashplate angle. The servo piston decreases swashplate angle. Nine reciprocating pistons displace fluid from the pump inlet to the pump outlet as the cylinder block rotates on the pump input shaft. The block spring holds the piston slippers to the swashplate via the slipper retainer. The cylinder block rides on a bi-metal valve plate optimized for high volumetric efficiency and low noise. Tapered roller bearings support the input shaft and a viton lip-seal protects against shaft leaks.

An adjustable one spool (PC only, not shown) or two spool (LS and PC) control senses system pressure and load pressure (LS controls). The control ports system pressure to the servo piston to control pump output flow.

Frame F cross section

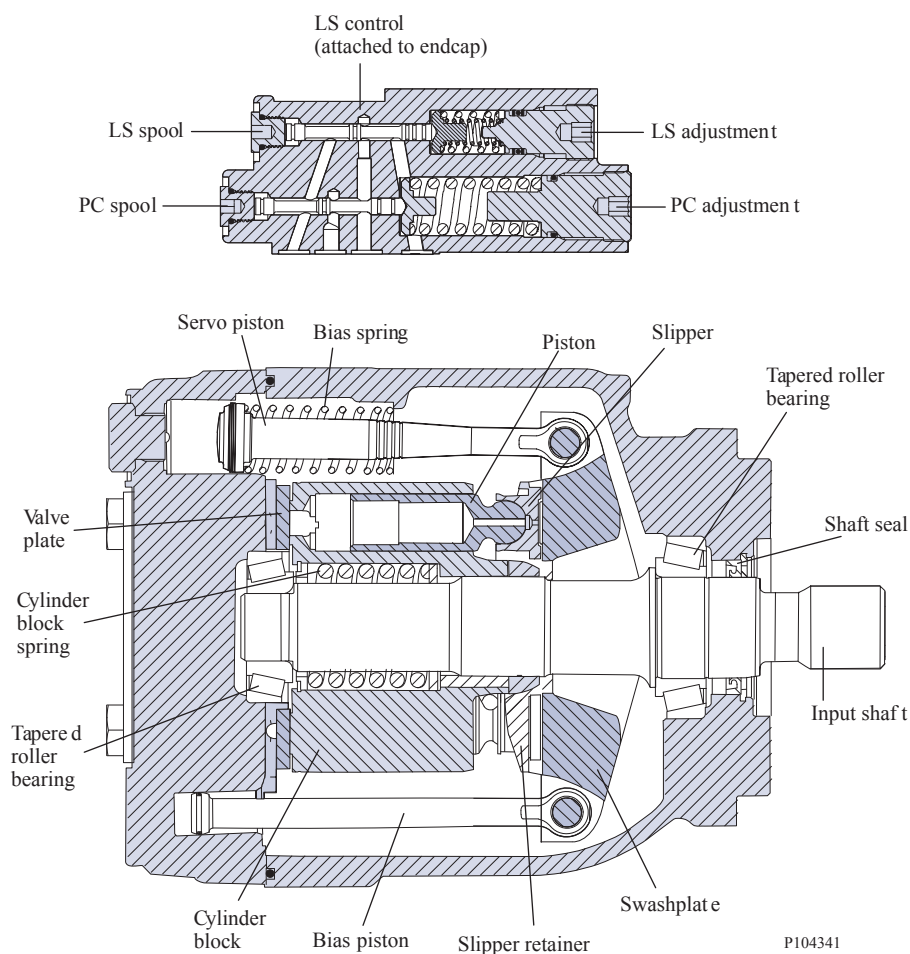

Frame F

Technical Specifications

| Feature | | Unit | F Frame | |
|---|-----------------------------|---|------------------|------------------|
| | | | 074B | 090C |
| Maximum Displacement | | cm ³ [in ³] | 74 [4.52] | 90 [5.49] |
| Working Input Speed | Minimum | min ⁻¹ (rpm) | 500 | 500 |
| | Continuous | | 2400 | 2200 |
| | Maximum | | 2800 | 2600 |
| Working Pressure | Continuous | bar [psi] | 310 [4500] | 260 [3770] |
| | Maximum | | 400 [5800] | 350 [5075] |
| Flow at rated speed (theoretical) | | l/min [US gal/min] | 178 [46.9] | 198 [52.3] |
| Input torque at maximum displacement (theoretical) at 49° C [120°F] | | N•m/bar [lbf•in/1000 psi] | 1.178 [719.3] | 1.433 [874.8] |
| Mass moment of inertia of internal rotating components | | kg•m ² [slug•ft ²] | 0.0063 [0.00465] | 0.0065 [0.00479] |
| Weight | Axial ports | kg [lb] | 29.5 [65.0] | |
| | Radial ports | | 32.6 [71.9] | |
| External Shaft Loads | External moment (Me) | N•m [lbf•in] | 300 [2655] | 300 [2655] |
| | Thrust in (Tin), out (Tout) | N [lbf] | 2900 [652] | 2900 [652] |
| 4-Bolt SAE-C mounting flange load moments | Vibratory (continuous) | N•m [lbf•in] | 3730 [33 100] | |
| | Shock (maximum) | | 13220 [117 100] | |
| 2-Bolt SAE-B mounting flange load moments | Vibratory (continuous) | | 1700 [15000] | |
| | Shock (maximum) | | 5900 [52000] | |

Order code

Code description

| Code | Description |
|------|--|
| R | Product Frame, Variable Open Circuit Pump |
| S | Rotation |
| P | Displacement |
| C | Control Type |
| D | Pressure Compensator Setting |
| E | Load Sense Setting |
| F | Not Used |
| G | Choke Orifice |
| H | Gain Orifice |
| J | Input Shaft/Auxiliary Mount/Endcap |
| K | Shaft Seal/Front Mounting Flange/Housing Ports |
| L | Displacement Limiter |
| M | Special Hardware |
| N | Special Features |

Frame F

R Product

| | | F Frame | |
|----|--|---------|------|
| | | 074B | 090C |
| FR | F Frame, variable displacement open circuit pump | • | • |

S Rotation

| | | | |
|---|------------------------------|---|---|
| L | Left Hand (counterclockwise) | • | • |
| R | Right Hand (clockwise) | • | • |

R Displacement

| | | | |
|------|--|---|---|
| 074B | 074 cm ³ /rev [4.52 in ³ /rev] | • | |
| 090C | 090 cm ³ /rev [5.49 in ³ /rev] | | • |

C Control type

| | | 074B | 090C |
|-----|---|------|------|
| PC | Pressure Compensator | • | • |
| BC* | Pressure Compensator [>280 bar] | • | |
| RP | Remote Pressure Compensator | • | • |
| BP* | Remote Pressure Compensator [>280 bar] | • | |
| LS | Load Sensing/Pressure Comp. | • | • |
| BS* | Load Sensing/Pressure Comp. [>280 bar] | • | |
| LB | Load Sensing/Pressure Comp. with internal bleed orifice | • | • |
| BB* | Load Sensing/Pressure Comp. with internal bleed orifice [>280 bar] | • | |
| AN | Electric On/Off w/Pressure Comp. (NO, 12VDC) Left | • | • |
| CN | Electric On/Off w/Pressure Comp. (NO, 24VDC) Left | • | • |
| AR | Electric On/Off w/Pressure Comp. (NC, 12VDC) Left | • | • |
| CR | Electric On/Off w/Pressure Comp. (NC, 24VDC) Left | • | • |
| AF | Electric On/Off w/Pressure Comp. (NO, 12VDC) Right | • | • |
| AT | Electric On/Off w/Pressure Comp. (NO, 24VDC) Right | • | • |
| AG | Electric On/Off w/Pressure Comp. (NC, 12VDC) Right | • | • |
| AY | Electric On/Off w/Pressure Comp. (NC, 24VDC) Right | • | • |
| BN* | Electric On/Off w/Pressure Comp. (NO, 12VDC) [>280 bar] Left | • | |
| DN* | Electric On/Off w/Pressure Comp. (NO, 24VDC) [>280 bar] Left | • | |
| BR* | Electric On/Off w/Pressure Comp. (NC, 12VDC) [>280 bar] Left | • | |
| DR* | Electric On/Off w/Pressure Comp. (NC, 24VDC) [>280 bar] Left | • | |
| BF* | Electric On/Off w/Pressure Comp. (NO, 12VDC) [>280 bar] Right | • | |
| DF* | Electric On/Off w/Pressure Comp. (NO, 24VDC) [>280 bar] Right | • | |
| BE* | Electric On/Off w/Pressure Comp. (NC, 12VDC) [>280 bar] Right | • | |
| BG* | Electric On/Off w/Pressure Comp. (NC, 24VDC) [>280 bar] Right | • | |
| AX | Electric Proportional Pressure Control w/Pressure Comp. (NO,12VDC) Left | • | • |
| CL | Electric Proportional Pressure Control w/Pressure Comp. (NO,24VDC) Left | | • |
| AH | Electric Proportional Pressure Control w/Pressure Comp. (NC,12VDC) Left | • | • |
| AL | Electric Proportional Pressure Control w/Pressure Comp. (NC,24VDC) Left | • | • |

Frame F

C Control type (continued)

| | | 074B | 090C |
|-----|---|------|------|
| AW | Electric Proportional Pressure Control w/Pressure Comp. (NO,12VDC) Right | • | • |
| CK | Electric Proportional Pressure Control w/Pressure Comp. (NO,24VDC) Right | • | • |
| AV | Electric Proportional Pressure Control w/Pressure Comp. (NC,12VDC) Right | • | • |
| AK | Electric Proportional Pressure Control w/Pressure Comp. (NC,24VDC) Right | • | • |
| BX* | Electric Proportional Pressure Control w/Pressure Comp. (NO,12VDC) [>280 bar] Left | • | |
| DL* | Electric Proportional Pressure Control w/Pressure Comp. (NO,24VDC) [>280 bar] Left | • | |
| BH* | Electric Proportional Pressure Control w/Pressure Comp. (NC,12VDC) [>280 bar] Left | • | |
| BL* | Electric Proportional Pressure Control w/Pressure Comp. (NC,24VDC) [>280 bar] Left | • | |
| BW* | Electric Proportional Pressure Control w/Pressure Comp. (NO,12VDC) [>280 bar] Right | • | |
| DK* | Electric Proportional Pressure Control w/Pressure Comp. (NO,24VDC) [>280 bar] Right | • | |
| BM* | Electric Proportional Pressure Control w/Pressure Comp. (NC,12VDC) [>280 bar] Right | • | |
| BK* | Electric Proportional Pressure Control w/Pressure Comp. (NC,24VDC) [>280 bar] Right | • | |
| FA* | Electric On/Off Dump valve w/Pressure Comp. + Load Sense (NC, 12VDC) Right | • | • |
| FB* | Electric On/Off Dump valve w/Pressure Comp. + Load Sense (NC, 12VDC) Left | • | • |
| FK | Load Sensing/Pressure Comp. (NC, 24VDC) Right | • | • |
| FL | Load Sensing/Pressure Comp. (NC, 24VDC) Left | • | • |
| FM | | • | • |
| TA | Electric Torque Limiting w/Pressure Comp. (NC,12VDC) Left | • | • |
| TB | Electric Torque Limiting w/Pressure Comp. (NC,24VDC) Left | • | • |
| TC | Electric Torque Limiting w/Pressure Comp. (NC,12VDC) Left | • | • |
| TD | Electric Torque Limiting w/Pressure Comp. (NC,24VDC) Left | • | • |
| TE | Electric Torque Limiting w/Pressure Comp. (NC,12VDC) Right | • | • |
| TF | Electric Torque Limiting w/Pressure Comp. (NC,24VDC) Right | • | • |
| TG | Electric Torque Limiting w/Pressure Comp. (NC,12VDC) Right | • | • |
| TH | Electric Torque Limiting w/Pressure Comp. (NC,24VDC) Right | • | • |
| SA | Pressure Comp (12 Vdc), 100-210 Bar - Left | • | • |
| SB | Pressure Comp (24 Vdc), 100-210 Bar - Left | • | • |
| SC | Pressure Comp (12 Vdc), 220-310 Bar - Left | • | • |
| SD | Pressure Comp (24 Vdc), 220-310 Bar - Left | • | • |
| SE | Pressure Comp (12 Vdc), 100-210 Bar - Right | • | • |
| SF | Pressure Comp (24 Vdc), 100-210 Bar - Right | • | • |
| SG | Pressure Comp (12 Vdc), 220-310 Bar - Right | • | • |
| SH | Pressure Comp (24 Vdc), 220-310 Bar - Right | • | • |

Left - E-Frame: CW Only, F-Frame: CW Only, J-frame: CW Axial, CCW Radial

Right - E-Frame: CCW Only, F-Frame: CCW Only, J-frame: CCW Axial, CW Radial

* Not available on 90cc pumps

DPC setting (2 digit code, 10 bar increments)

| | | F Frame | |
|---------|-----------------------------------|---------|------|
| | | 074B | 090C |
| Example | 25 = 250 bar (3625 psi) | | |
| 10-26 | 100 to 260 bar [1450 to 3771 psi] | • | • |

Frame F

D PC setting (2 digit code, 10 bar increments) (continued)

| | | F Frame | |
|-------|-----------------------------------|---------|------|
| | | 074B | 090C |
| 27-28 | 270 to 280 bar [3916 to 4061 psi] | • | |
| 29-31 | 290-310 bar [4206 to 4496 psi] | • | |

E Load sensing setting (2 digit code, 1 bar increments)

| | | | |
|---------|---|---|---|
| Example | 20 = 20 bar (290 psi) | | |
| 10-40 | 10 to 34 bar [145 to 508 psi] | • | • |
| NN | Not applicable (pressure compensated only controls) | • | • |

F Not used

| | | | |
|----|----------------|---|---|
| NN | Not applicable | • | • |
|----|----------------|---|---|

G Servo Control Orifice

| | | | |
|---|-----------------|---|---|
| N | None (standard) | • | • |
| E | 0.8 mm diameter | • | • |
| F | 1.0 mm diameter | • | • |

H Gain Orifice

| | | | |
|---|--|---|---|
| 3 | 1.0 mm diameter (standard orifice) | • | • |
| C | 0.8 mm diameter LS signal line orifice for ETL use (with standard orifice) | • | • |

Additional LS signal line orifice size options are available for necessary system tuning requirements. Contact your Danfoss representative for further information.

J Input Shaft

| | |
|----|--------------------------|
| S1 | 14 tooth 12/24 pitch |
| S2 | 17 tooth, 12/24 pitch |
| K4 | 1.25 inch straight keyed |

Auxiliary Mount/Endcap Style

| Auxiliary Description | Endcap Style | Inlet Porting | Outlet Porting | Endcap Description | Code |
|-----------------------|--------------|---------------|----------------|---|------|
| None | Axial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) | N4 |
| None | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) | N2 |
| Running Cover | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) | R2 |
| SAE-A, 9 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) | A2 |
| SAE-A, 11 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) | T2 |
| SAE-B, 13 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) | B2 |

Frame F

Auxiliary Mount/Endcap Style (continued)

| | | | | | |
|------------------|--------|--------------|--------------|---|----|
| SAE-BB, 15 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) | V2 |
| SAE-C, 14 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2 inch port 0.5 inch threads) Outlet - Code 61 Split Flange Port 4 Bolt (1 inch port 0.375 inch threads) | C2 |

J Input Shaft/Auxiliary Mount/Endcap

Available Combinations

| | F Frame | |
|------|---------|------|
| | 074B | 090C |
| K4A2 | • | • |
| K4B2 | • | • |
| K4C2 | • | • |
| K4N2 | • | • |
| K4N4 | • | • |
| K4R2 | • | • |
| K4T2 | • | • |
| K4V2 | • | • |
| S1A2 | • | • |
| S1B2 | • | • |
| S1C2 | • | • |
| S1N2 | • | • |
| S1NB | • | • |
| S1N4 | • | • |
| S1R2 | • | • |
| S1T2 | • | • |
| S1V2 | • | • |

| | F Frame | |
|------|---------|------|
| | 074B | 090C |
| S2A2 | • | • |
| S2B2 | • | • |
| S2C2 | • | • |
| S2N2 | • | • |
| S2N4 | • | • |
| S2R2 | • | • |
| S2T2 | • | • |
| S2V2 | • | • |

K Shaft seal

| | | F Frame | |
|---|----------------|---------|------|
| | | 074B | 090C |
| A | Single (Viton) | • | • |

Frame F

K Mounting flange and housing port style

| | | | |
|---|--|---|---|
| 1 | SAE-C Flange 4-bolt/SAE O-ring boss ports (available with or without angle sensor) | • | • |
| 3 | SAE-B Flange 2-bolt/SAE O-ring boss ports (not available with angle sensor) | • | • |
| G | SAE-C Flange 4-bolt/Metric O-ring boss ports (not available with angle sensor) | • | • |

K Angle Sensor Housing

| | | | |
|---|---------------------------------------|---|---|
| N | Without angle sensor | • | • |
| R | Angle Sensor Housing, Right Hand Side | • | • |

* When viewing pump from input shaft, control oriented on top

L Displacement limiter

| | | | |
|-----|--------------------------------------|---|---|
| NNN | None (plugged) | • | • |
| AAA | Adjustable, factory set at max angle | • | • |

M Special hardware

| | | | |
|-----|-----------------------|---|---|
| NNN | None | • | • |
| ANS | Angle sensor hardware | • | • |

N Special features


| | | | |
|-----|------|---|---|
| NNN | None | • | • |
|-----|------|---|---|

Frame F


Performance F74B

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].


Flow vs. speed

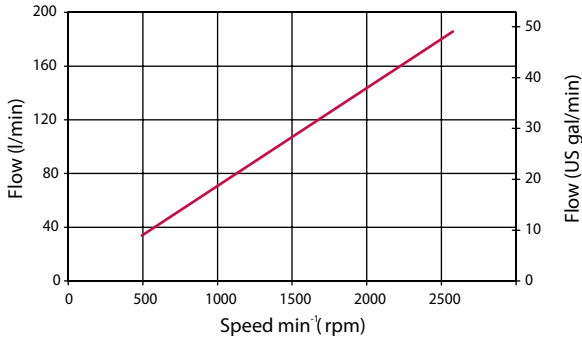


Input power vs. speed

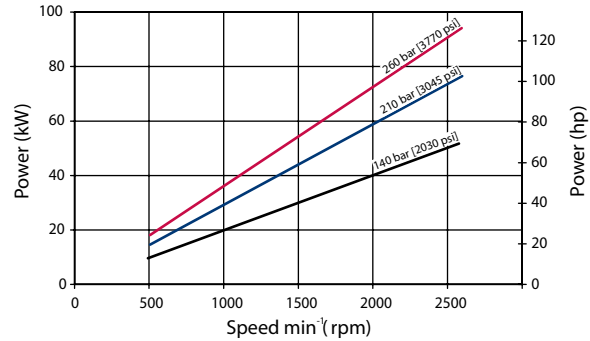


Efficiency

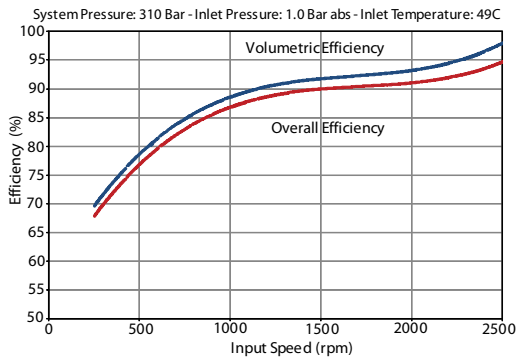

Noise

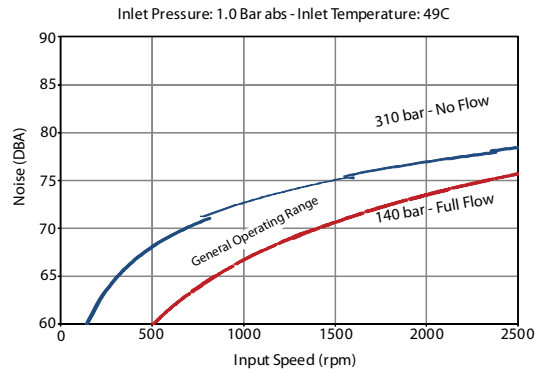

Inlet pressure vs. speed





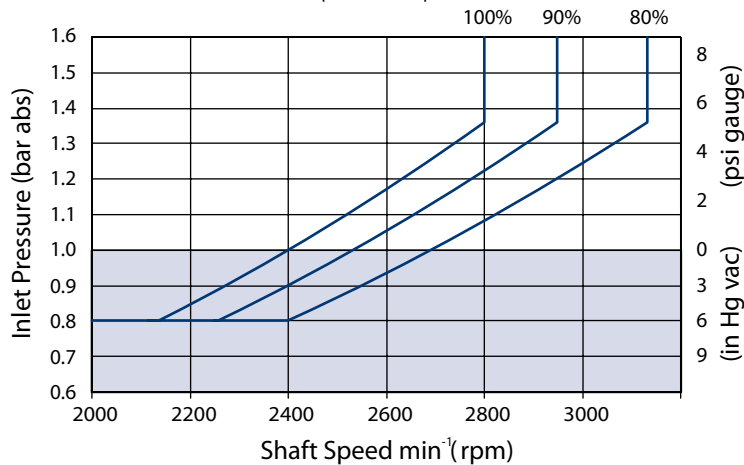


The chart above shows allowable inlet pressure and speed at various displacements. Greater speeds and lower inlet pressures are possible at reduced displacement. Operating outside of acceptable limits reduces pump life.

Frame F

Performance F90C

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].

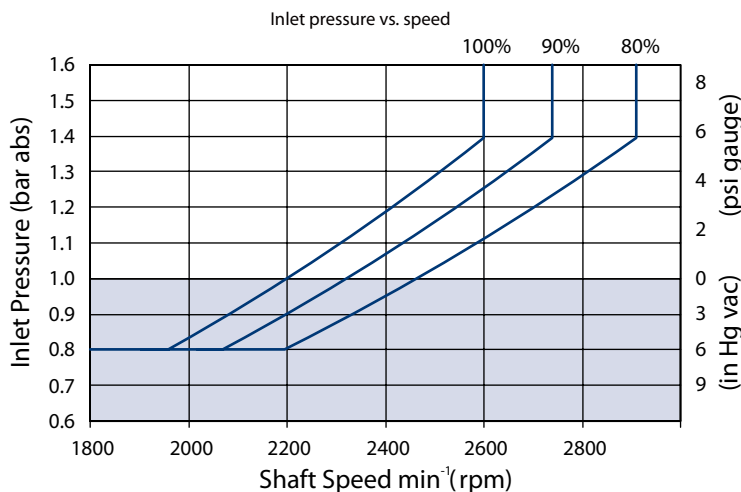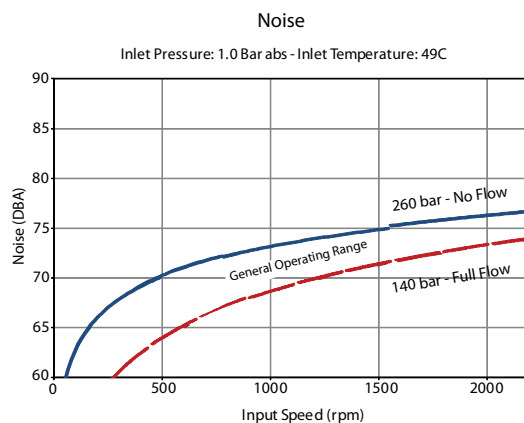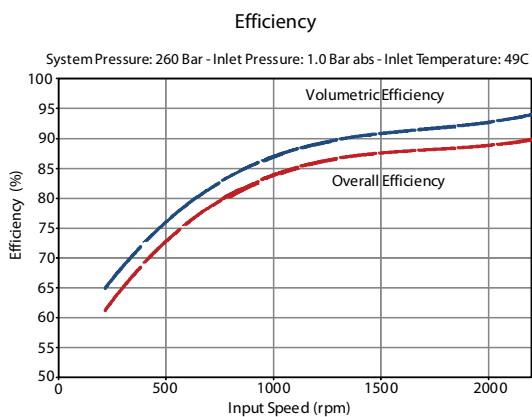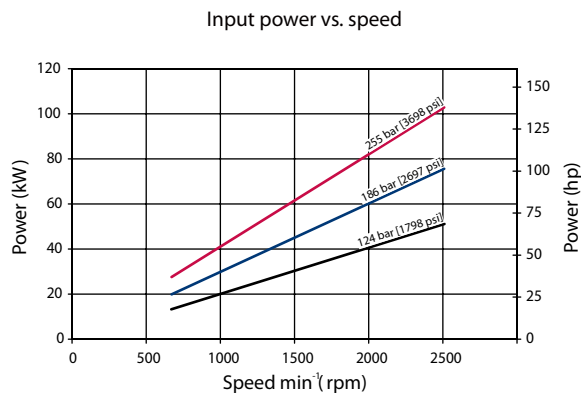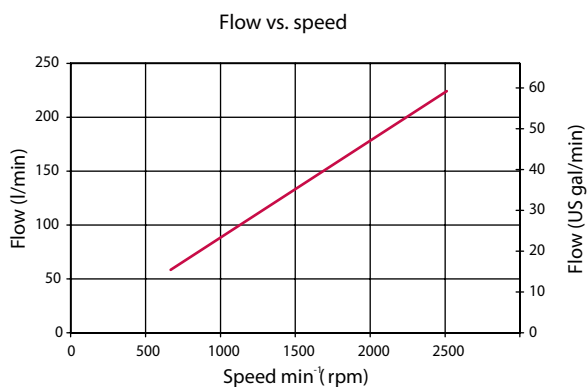

The chart above shows allowable inlet pressure and speed at various displacements. Greater speeds and lower inlet pressures are possible at reduced displacement. Operating outside of acceptable limits reduces pump life.

Frame F

Hydraulic Controls

Pressure Compensated Controls


Response/recovery times

| (msec) | Response | Recovery |
|--------|----------|----------|
| F74B | 35 | 120 |
| F90C | 35 | 135 |

PC setting range

| Model | PC | BC |
|-------|--------------------------------|--------------------------------|
| F74B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| F90C | 100-260 bar [1450-3770 psi] | N/A |

Schematic

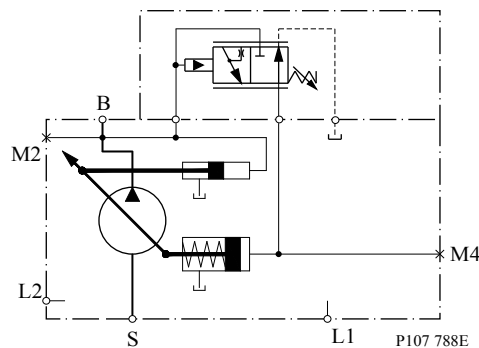

B = Outlet

S = Inlet

L1, L2 = Case drain

M2 = System pressure gauge port

M4 = Servo pressure gauge port

Remote Pressure Compensated Controls

Response/recovery times

| (msec) | Response | Recovery |
|--------|----------|----------|
| F74B | 35 | 120 |
| F90C | 35 | 135 |


PC setting range

| Model | RP | BP |
|-------|--------------------------------|--------------------------------|
| F74B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| F90C | 100-260 bar [1450-3770 psi] | N/A |

Frame F

An LS Setting of 20 is required for this control

Remote PC schematic

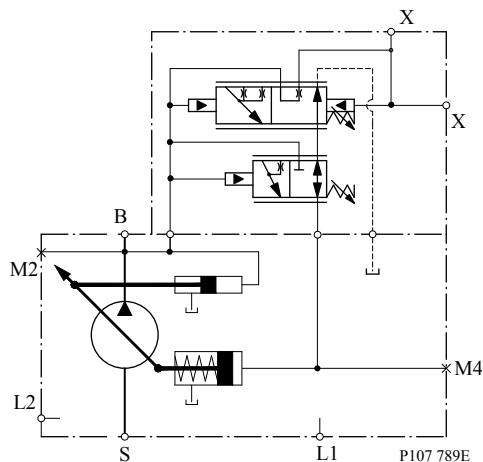

B = Outlet

S = Inlet

L1, L2 = Case drain

M2 = System pressure gauge port

M4 = Servo pressure gauge port

X = Remote PC port

Load Sensing/Pressure Compensated Controls

*Response/recovery times**

| (msec) | Response | Recovery |
|--------|----------|----------|
| F74B | 35 | 135 |
| F90C | 45 | 135 |

PC setting range


| Model | bar | psi |
|-------|--------------------------------|--------------------------------|
| F74B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| F90C | 100-260 bar [1450-3770 psi] | N/A |

LS setting range

| Model | bar | psi |
|-------|-------|---------|
| All | 10-30 | 145-435 |

Frame F

Schematic

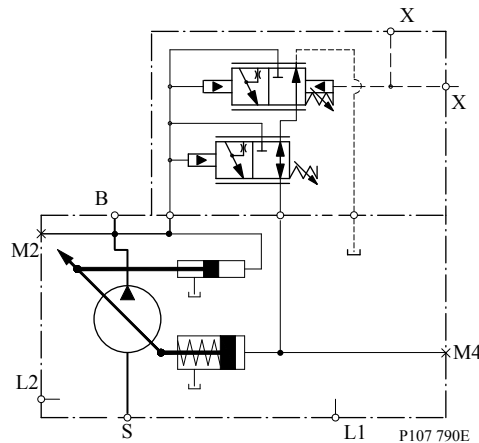

- B = Outlet
- S = Inlet
- L1, L2 = Case drain
- M2 = System pressure gauge port
- M4 = Servo pressure gauge port
- X = LS signal port

Load Sensing Control with Bleed Orifice/Pressure Compensated

*Response/recovery times**

| (msec) | Response | Recovery |
|--------|----------|----------|
| E100B | 45 | 200 |
| E130B | 50 | 200 |
| E147C | 60 | 200 |

PC setting range


| Model | LB | BB |
|-------|--------------------------------|--------------------------------|
| E100B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| E130B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| E147C | 100-260 bar [1450-3770 psi] | N/A |

LS setting range

| Model | bar | psi |
|-------|-------|---------|
| All | 10-34 | 145-435 |

Frame F

Schematic

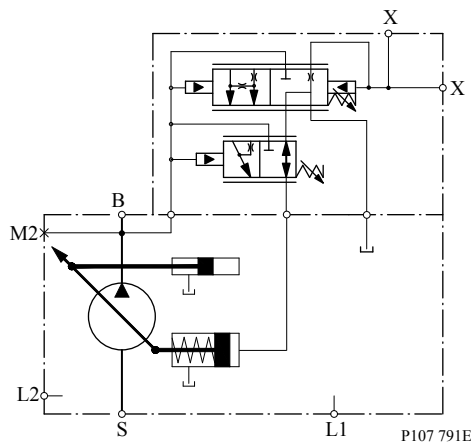


- B = Outlet
- S = Inlet
- L1, L2 = Case drain
- M2 = System pressure gauge port
- M4 = Servo pressure gauge port
- X = LS signal port

Electric Controls

Connectors


| Description | Quantity | Ordering Number |
|--------------------------------|----------|-------------------------|
| Mating Connector | 1 | Deutsch® DT06-2S |
| Wedge Lock | 1 | Deutsch® W25 |
| Socket Contact (16 and 18 AWG) | 2 | Deutsch® 0462-201-16141 |
| Danfoss mating connector kit | 1 | K29657 |



P003 480

Frame F

Continuous Duty Operating Range

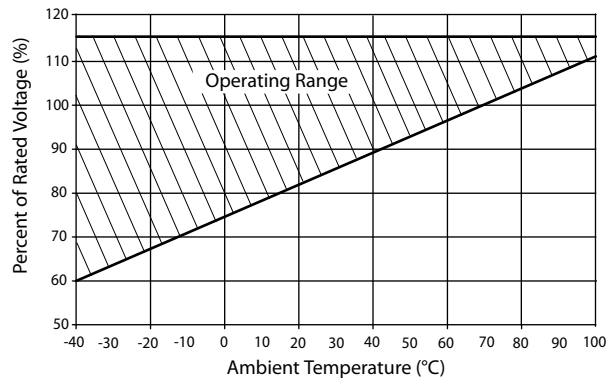

Solenoid Data - Normally Closed

| Voltage | 12V | 24V |
|---|---------|---------|
| Threshold Control [mA] (310/260 bar PC setting, oil temp X) | 200/400 | 100/200 |
| End Current [mA] (20 bar LS setting, oil temp X) | 1200 | 600 |

Solenoid Data - Normally Open

| Voltage | 12V | 24V |
|--|-----------|---------|
| Threshold Control [mA] (20 bar LS setting, oil temp X) | 0 | 0 |
| End Current [mA] (260/310 bar PC setting, oil temp X) | 1000/1100 | 500/550 |

Hysteresis

| Frame | Hysteresis |
|-------|--|
| F74B | Input hysteresis <4% (control current): Output hysteresis <4.5% (system pressure) |
| F90C | Input hysteresis <4% (control current): Output hysteresis <4.5% (system pressure) |

Fan Drive Control Solenoid Data - Normally Closed

| Voltage | 12V | 24V |
|------------------------------|------|-----|
| Maximum Control Current [mA] | 1800 | 920 |

Normally Closed Electric On/Off with Pressure Compensation Controls

*Response/Recovery times**

| (msec) | Response | Recovery |
|--------|----------|----------|
| F74B | 35 | 120 |
| F90C | 35 | 135 |

* Without servo control orifice


Frame F

LS setting range

| Model | bar | psi |
|-------|---------|-------------|
| All | 10 - 40 | [145 - 580] |

For fan-drive systems, and systems with motors, select an LS setting no less than 15 bar to enhance system stability. As the LS setting is reduced, the risk for system instability may be increased. A 20 bar LS setting is recommended as a starting point for all new applications.

Schematic

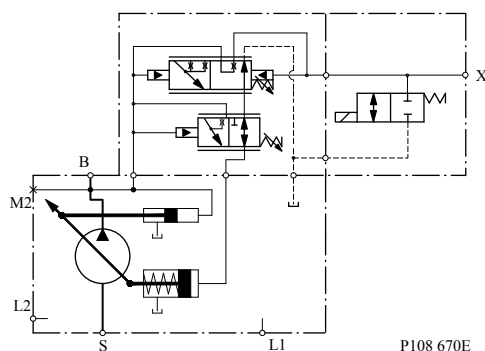

- B = Outlet
- S = Inlet
- L1, L2 = Case drain
- M2 = System pressure gauge port
- X = Load Sense Port

PC setting range

| Frame | AG, AR (12V) | BE, BR (12V) | AY, CR (24V) | BG, DR (24V) |
|-------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| F74B | 100-280 bar [1450-4060] psi | 290-310 bar [4205-4495] psi | 100-280 bar [1450-4060] psi | 290-310 bar [4205-4495] psi |
| F90C | 100-260 bar [1450-3770] psi | Not Available | 100-260 bar [1450-3770] psi | Not Available |

Normally Open Electric On/Off with Pressure Compensation Controls

*Response/Recovery times**

| (msec) | Response | Recovery |
|--------|----------|----------|
| F74B | 35 | 120 |
| F90C | 35 | 135 |

* Without servo control orifice


LS setting range

| Model | bar | psi |
|-------|---------|-------------|
| All | 12 - 40 | [174 - 580] |

For fan-drive systems, and systems with motors, select an LS setting no less than 15 bar to enhance system stability. As the LS setting is reduced, the risk for system instability may be increased. A 20 bar LS setting is recommended as a starting point for all new applications.

Frame F

Schematic

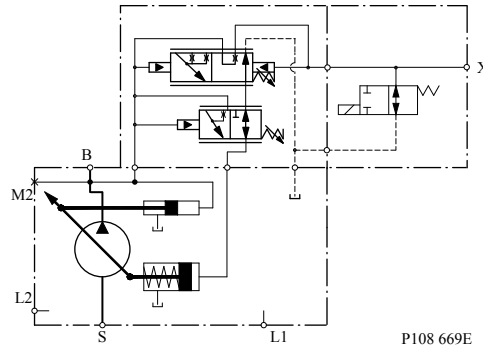

- B = Outlet
- S = Inlet
- L1, L2 = Case drain
- M2 = System pressure gauge port
- X = Load Sense Port

PC setting range

| Frame | AF, AN (12V) | BF, BN (12V) | AT, CN (24V) | DF, DN (24V) |
|-------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| F74B | 100-280 bar [1450-4060] psi | 290-310 bar [4205-4495] psi | 100-280 bar [1450-4060] psi | 290-310 bar [4205-4495] psi |
| F90C | 100-260 bar [1450-3770] psi | Not Available | 100-260 bar [1450-3770] psi | Not Available |

Normally Closed Electric Proportional with Pressure Compensation Controls


Response/Recovery times

| (msec) | 0.8mm Orifice | | 1.0mm Orifice | |
|--------|---------------|----------|---------------|----------|
| | Response | Recovery | Response | Recovery |
| F74B | 35 | 365 | 35 | 280 |
| F90C | 35 | 410 | 35 | 315 |

LS setting range

| Model | bar | psi |
|-------|---------|-------------|
| All | 10 - 40 | [145 - 580] |

Schematic

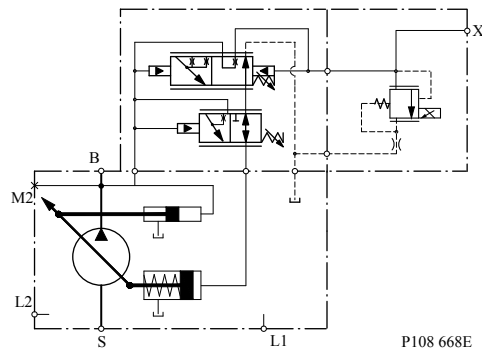

Frame F

B = Outlet

S = Inlet

L1, L2 = Case drain

M2 = System pressure gauge port

X = Load Sense Port


PC setting range

| Frame | AH, AV (12V) | BH, BM (12V) | AK, AL (24V) | BK, BL (24V) |
|-------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| F74B | 100-280 bar [1450-4060] psi | 290-310 bar [4205-4495] psi | 100-280 bar [1450-4060] psi | 290-310 bar [4205-4495] psi |
| F90C | 100-260 bar [1450-3770] psi | Not Available | 100-260 bar [1450-3770] psi | Not Available |

For fan-drive systems, and systems with motors, select an LS setting no less than 15 bar to enhance system stability. As the LS setting is reduced, the risk for system instability may be increased. A 20 bar LS setting is recommended as a starting point for all new applications.

Electric proportional controls have a unique relationship between margin (LS) setting and low pressure standby. See the graph below for this relationship.

Frames E, F, J Electric Proportional Control Low Pressure Standby

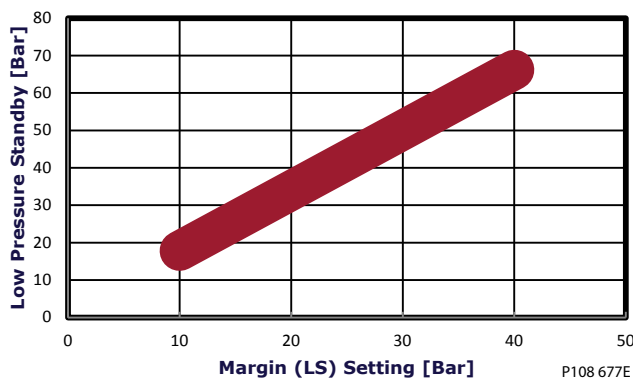

Normally Open Electric Proportional with Pressure Compensation Controls

Response/Recovery times


| (msec) | 0.8mm Orifice | | 1.0mm Orifice | |
|--------|---------------|----------|---------------|----------|
| | Response | Recovery | Response | Recovery |
| F74B | 35 | 365 | 35 | 280 |
| F90C | 35 | 410 | 35 | 315 |

LS setting range

| Model | bar | psi |
|-------|---------|-------------|
| All | 10 - 40 | [145 - 580] |

Frame F

Schematic

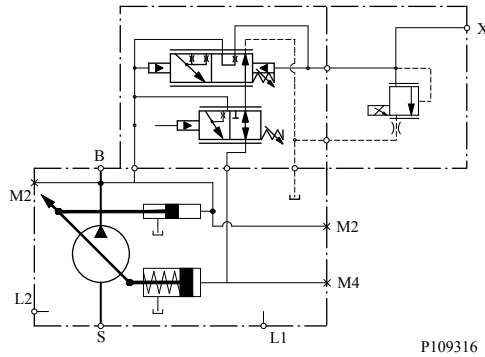

- B = Outlet
- S = Inlet
- L1, L2 = Case drain
- M2 = System pressure gauge port
- X = Load Sense Port


PC setting range

| Frame | AW, AX (12V) | BW, BX (12V) | CK, CL (24V) | DK, DL (24V) |
|-------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| F74B | 100-280 bar [1450-4060] psi | 290-310 bar [4205-4495] psi | 100-280 bar [1450-4060] psi | 290-310 bar [4205-4495] psi |
| F90C | 100-260 bar [1450-3770] psi | Not Available | 100-260 bar [1450-3770] psi | Not Available |

For fan-drive systems, and systems with motors, select an LS setting no less than 15 bar to enhance system stability. As the LS setting is reduced, the risk for system instability may be increased. A 20 bar LS setting is recommended as a starting point for all new applications.

Electric proportional controls have a unique relationship between margin (LS) setting and low pressure standby. See the graph below for this relationship.

**Frames E, F, J Electric Proportional Control
 Low Pressure Standby**

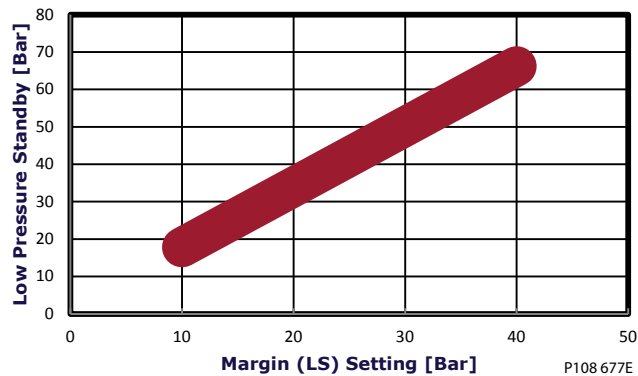


Frame F

Normally Closed Electric Torque Limiting Control with Pressure Compensation Controls

Response/recovery times

| (msec) | Response | Recovery |
|--------|----------|----------|
| F74B | 35 | 120 |
| F90C | 35 | 135 |

Pin location



P200151

Pinout

| Pin | Description |
|-----|------------------------------------|
| 1 | Supply - |
| 2 | Output signal 2 - Secondary Signal |
| 3 | Output signal 1 - Primary Signal |
| 4 | Supply + |

PC setting range

| Frame | TA, TE (12V) | TC, TG (12V) | TB, TF (24V) | TD, TH (24V) |
|-------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| F74B | 100-280 bar [1450-4060] psi | 290-310 bar [4205-4495] psi | 100-280 bar [1450-4060] psi | 290-310 bar [4205-4495] psi |
| F90C | 100-260 bar [1450-3770] ps | Not Available | 100-260 bar [1450-3770] ps | Not Available |


LS setting range

| Model | bar | psi |
|-------|---------|-------------|
| All | 10 - 40 | [145 - 580] |

For fan-drive systems, and systems with motors, select an LS setting no less than 15 bar to enhance system stability. As the LS setting is reduced, the risk for system instability may be increased. A 20 bar LS setting is recommended as a starting point for all new applications.

Frame F

F-frame pump with integrated ETL control

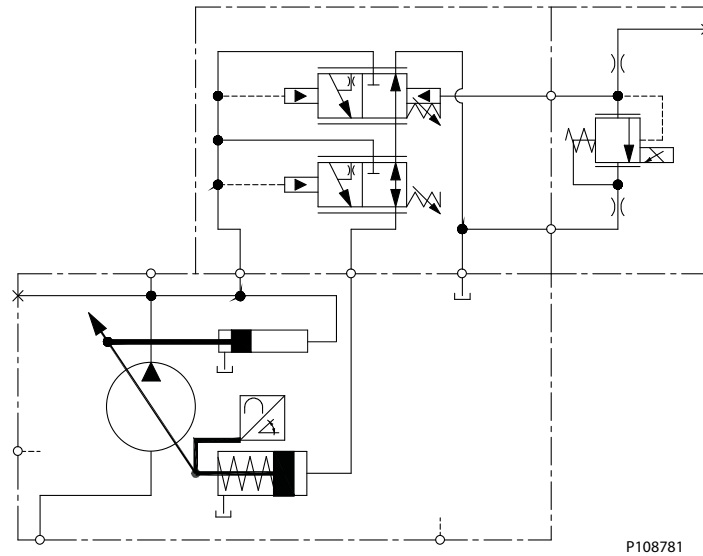


Normally Closed Fan Drive Control

PC setting range

| Frame | SA, SE (12V) | SC, SG (12V) | SB, SF (24V) | SD, SH (24V) |
|-------|--------------------------------|---------------------------------|--------------------------------|---------------------------------|
| F074B | 100-210 bar [1450-3045] psi | 220-310 bar [3190-4495] psi | 100-210 bar [1450-3045] psi | 220-310 bar [3190-4495] psi |
| F090C | 100-210 bar [1450-3045] psi | 220-260 bar [3190-3771] psii | 100-210 bar [1450-3045] psi | 220-260 bar [3190-3771] psii |

Fan Drive Control Schematic

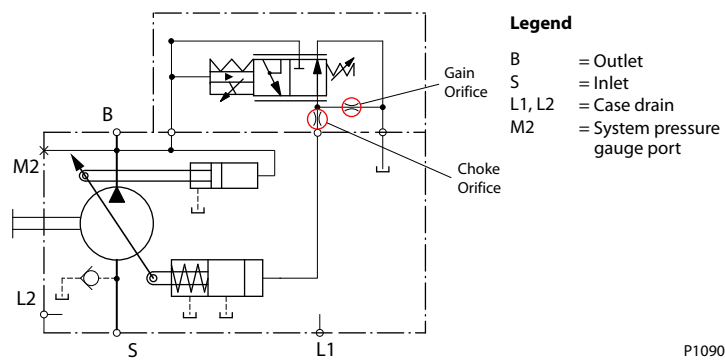

Frame F

Input shafts

Shaft data


| Code | Description | Maximum torque rating ¹ N•m [lbf•in] | Drawing |
|------|---|--|---------|
| K4 | Ø 31.75 mm [1.25 in] Straight keyed | 734 [6495] | |
| S1 | 14 tooth spline 12/24 pitch (ANSI B92.1B 1996 - Class 6e) | 800 [7080] | |
| S2 | 17 tooth spline 12/24 pitch (ANSI B92.1B 1996 - Class 6e) | 1150 [10178] | |

1. See [Input shaft torque ratings](#) for an explanation of maximum torque.


Frame F

Installation drawings

Axial Ported Endcap

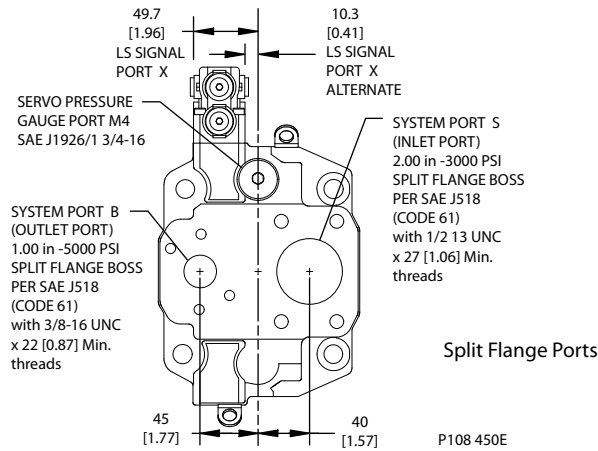


Axial Ported Endcap Installation Dimensions

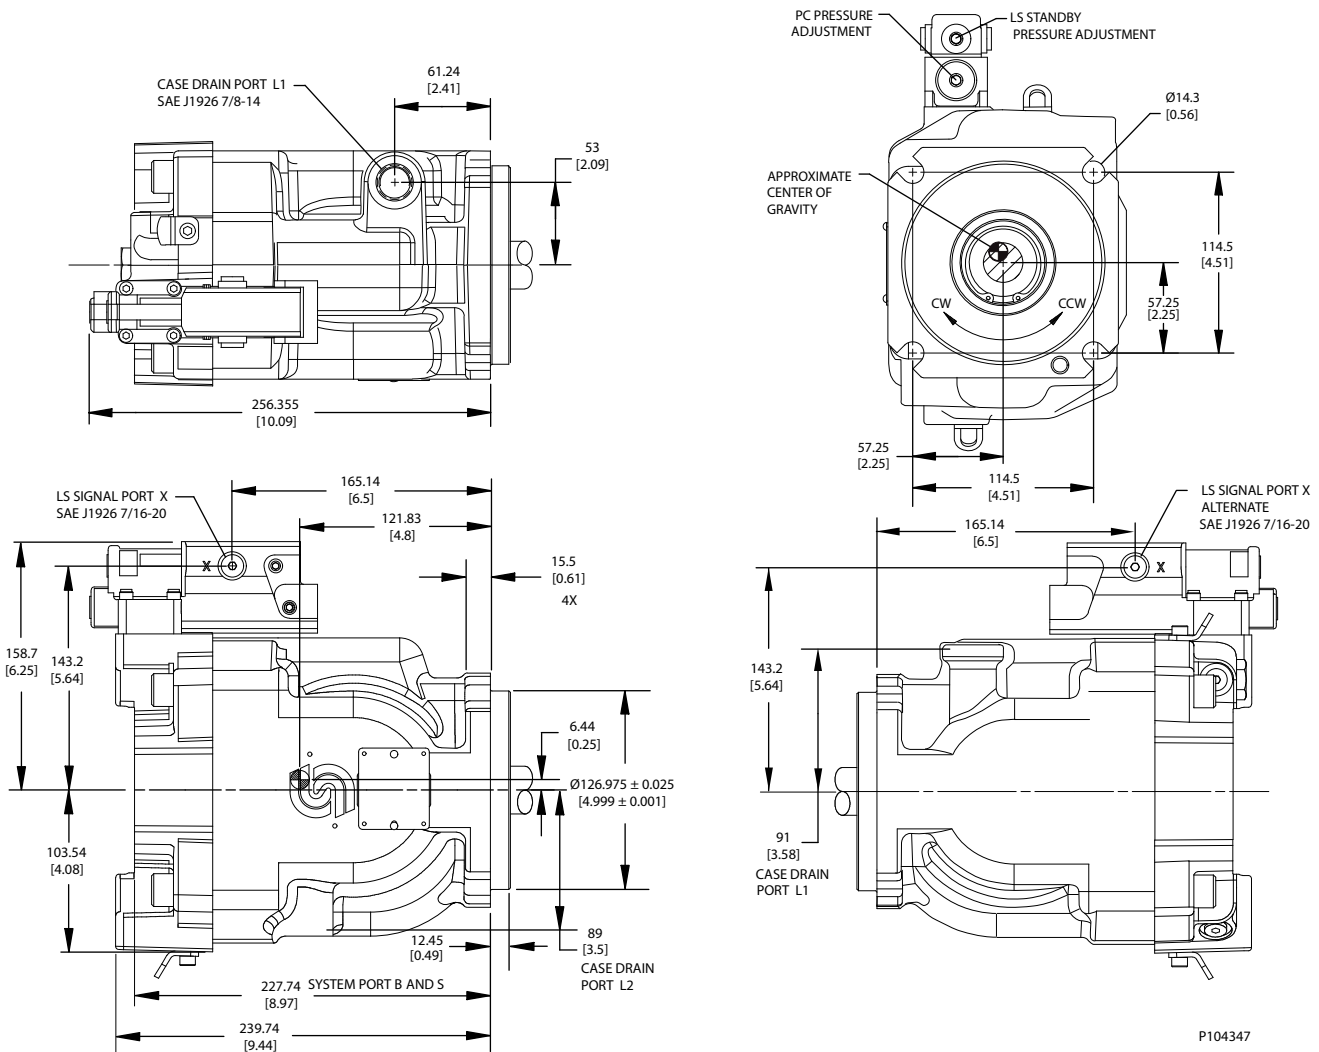


Frame F

Right Fan Drive Control

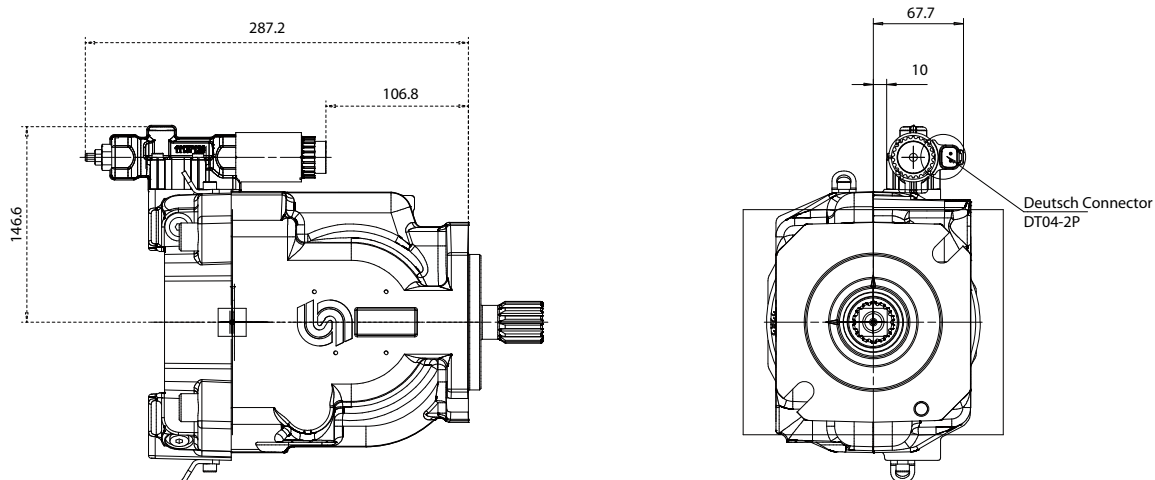


P109022

Radial Ported Endcap Split Flange Ports

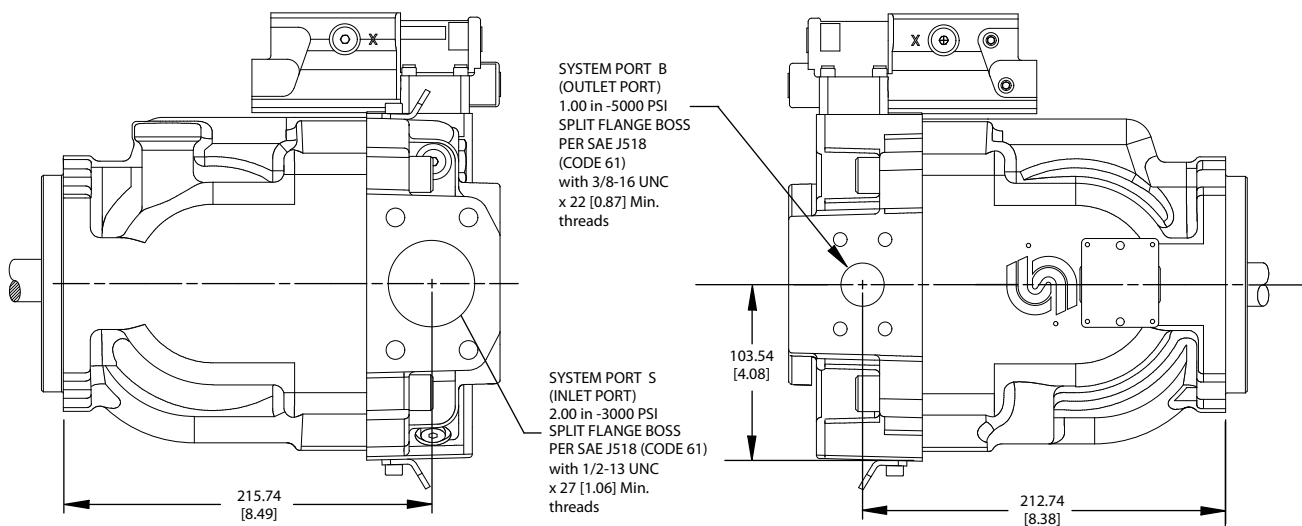


Frame F

Radial Ported Endcap Rear View

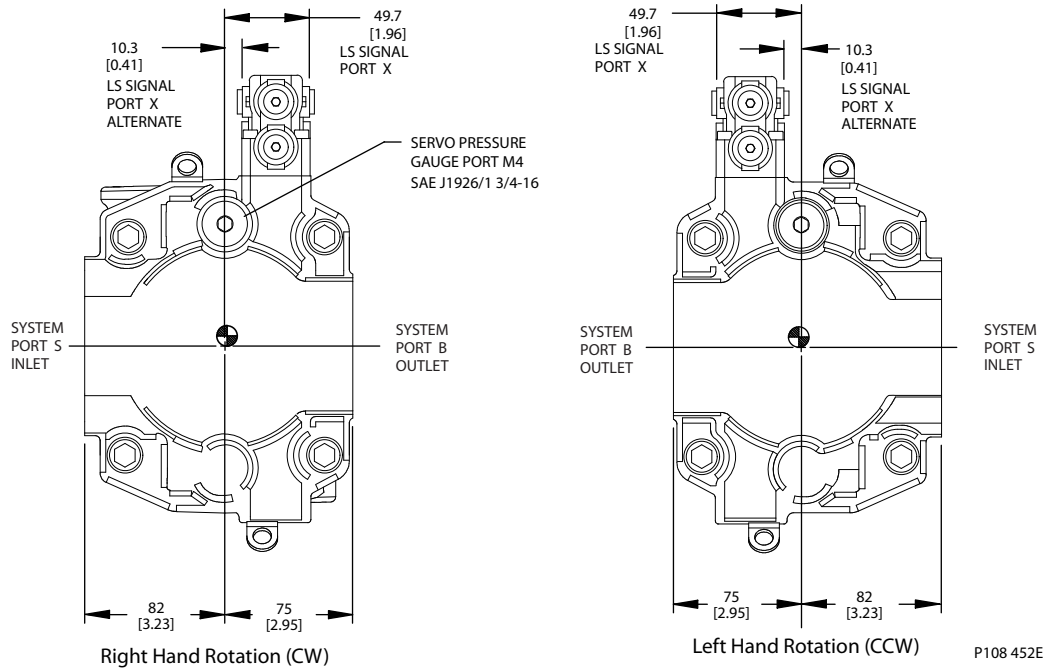




Frame F

Radial Ported Endcap Installation Dimensions

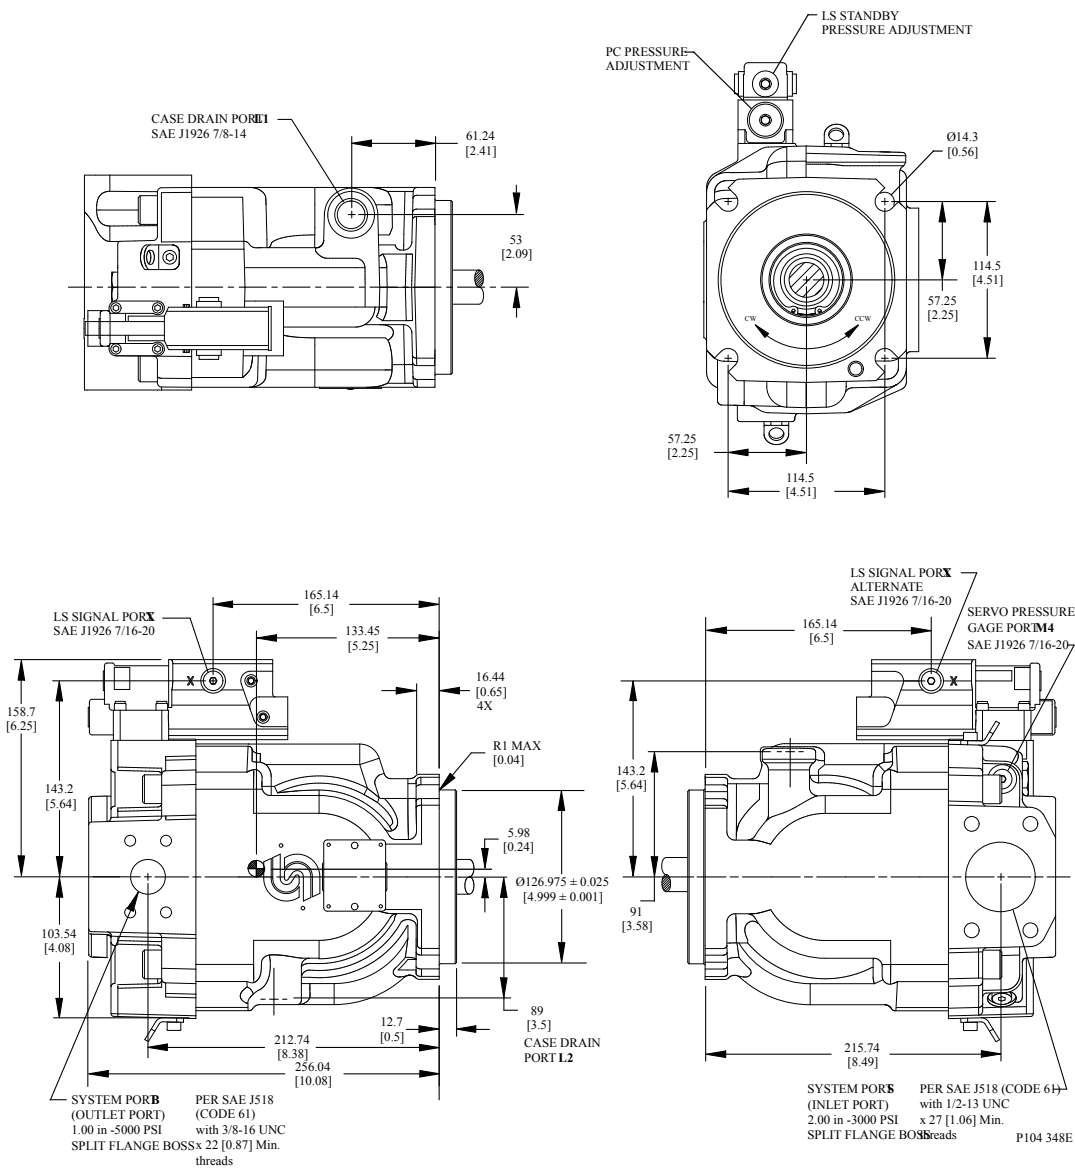

Frame F


Right Angle Sensor Position Installation Dimensions

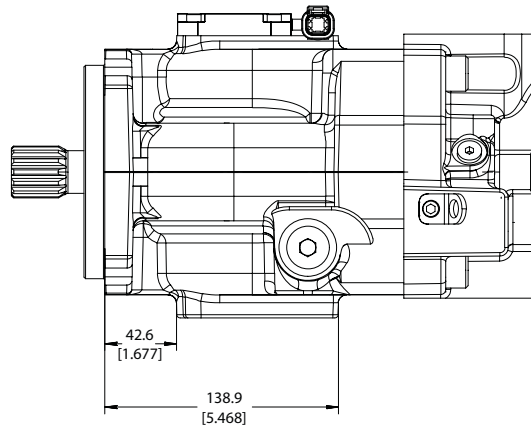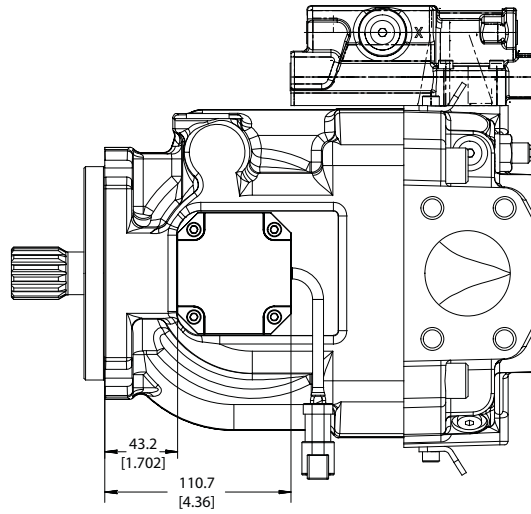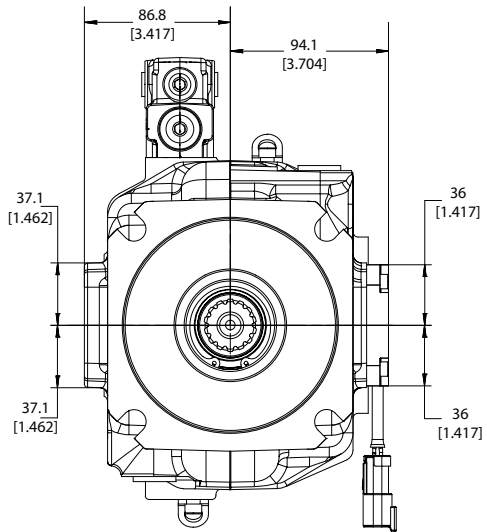

P108782

Frame F


Front Mounting Flange

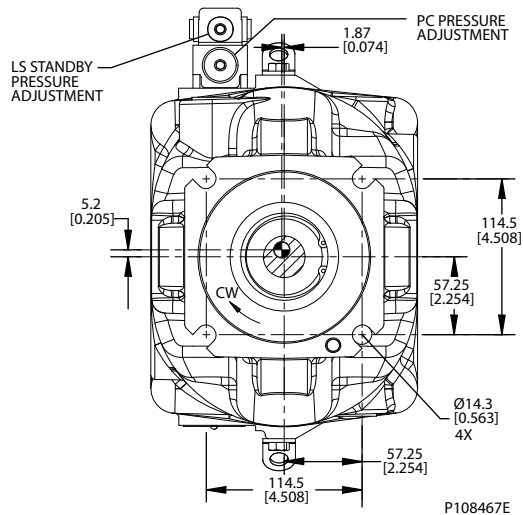

Auxiliary mounting pads

SAE-A auxiliary mounting pad

Dimensions

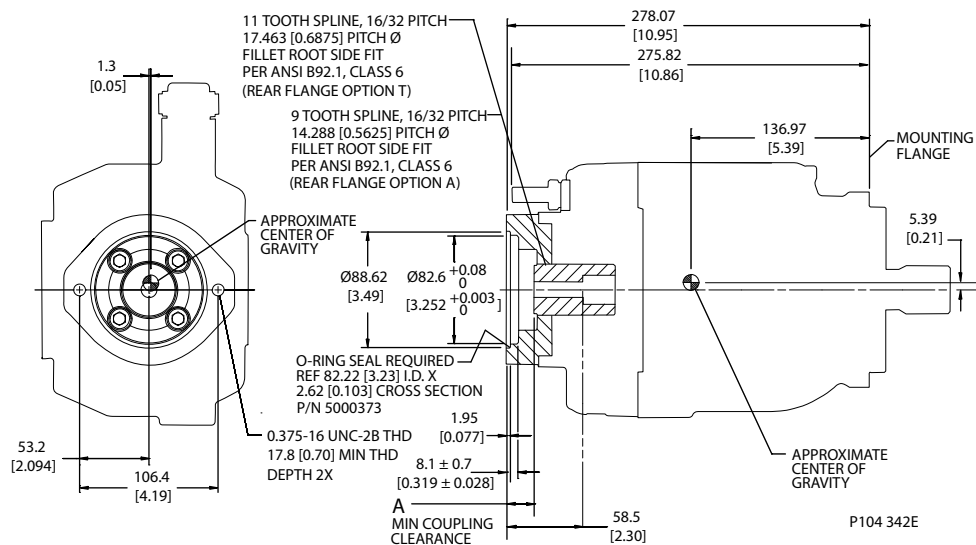


Specifications

| Coupling | 9-tooth | 11-tooth |
|---------------------------|----------------------|-----------------------|
| Spline minimum engagement | 13.5 mm [0.53 in] | 15 mm [0.59 in] |
| Maximum torque | 107 N·m [950 lbf·in] | 147 N·m [1300 lbf·in] |
| Dimension A | 14.9 mm [0.59 in] | 16.1 mm [0.63 in] |

Frame F

SAE-B auxiliary mounting pad

Dimensions

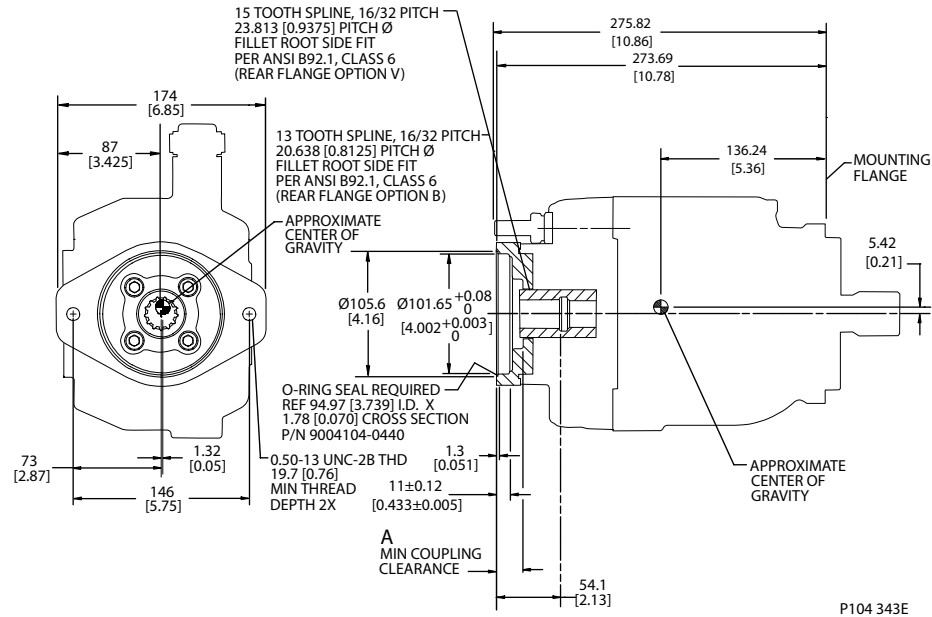


Specifications

| Coupling | 13-tooth | 15-tooth |
|---------------------------|-----------------------|-----------------------|
| Spline minimum engagement | 14.2 mm [0.56 in] | 18.9 mm [0.74 in] |
| Maximum torque | 249 N·m [2200 lbf·in] | 339 N·m [3000 lbf·in] |
| Dimension A | 20.7 mm [0.81 in] | 12.7 mm [0.5 in] |

SAE-C auxiliary mounting pad

Dimensions

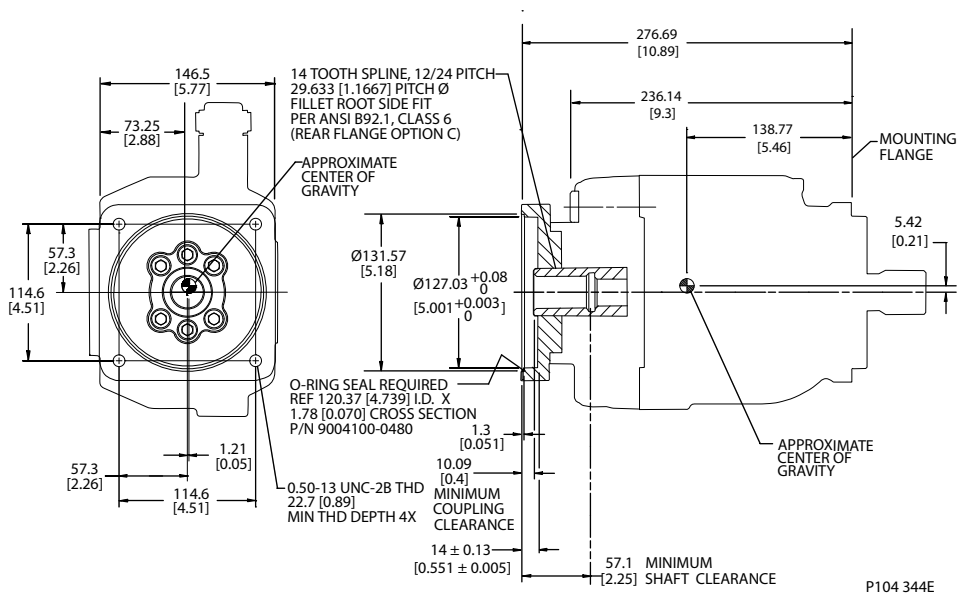


Frame F

Specifications

| | |
|---------------------------|-----------------------|
| Coupling | 14-tooth |
| Spline minimum engagement | 18.3 mm [0.72 in] |
| Maximum torque | 339 N·m [3000 lbf·in] |


Running Cover

Dimensions

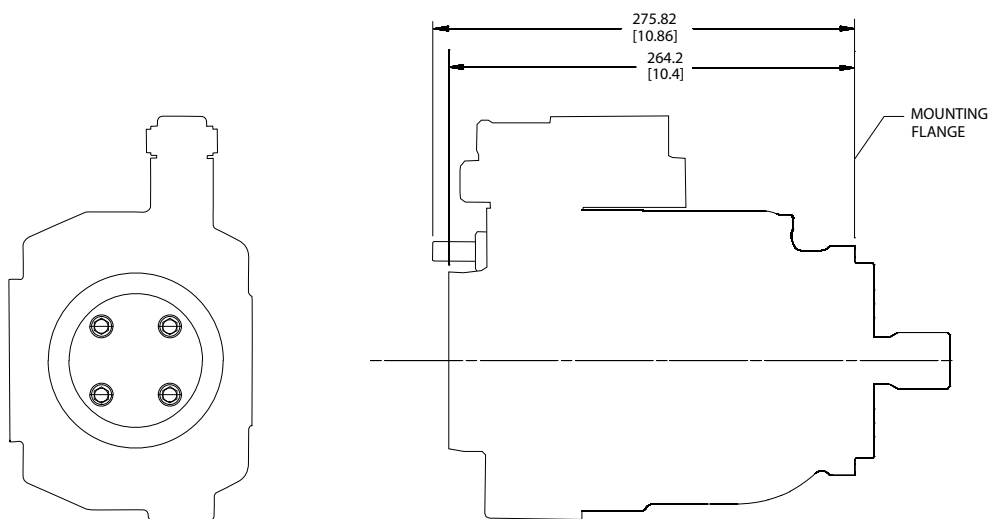



P104 346E

Radial Endcap Clockwise

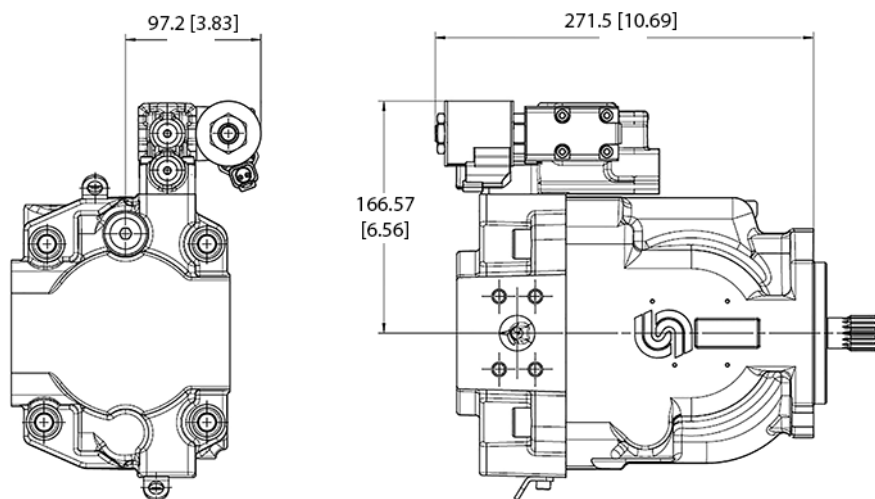



Frame F

Radial Endcap Counterclockwise

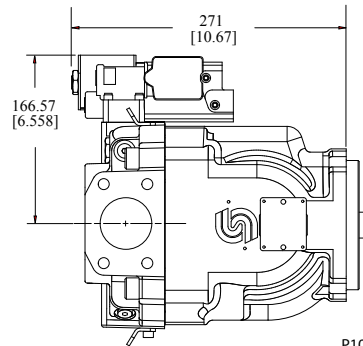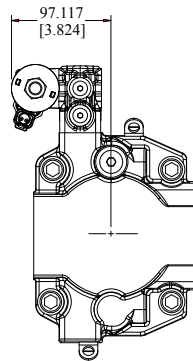



P108 455E

Axial Endcap Clockwise

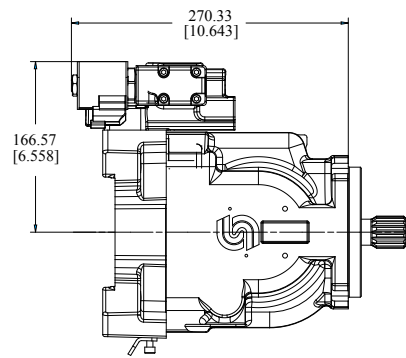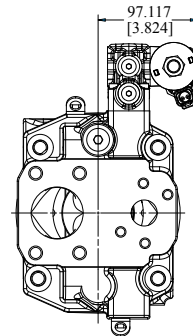

P108 456E

Axial Endcap Counterclockwise

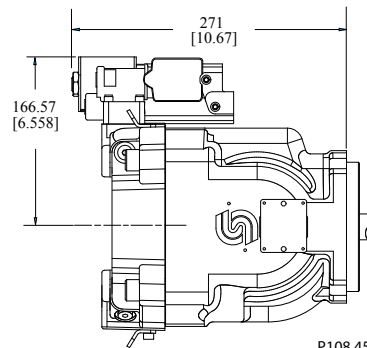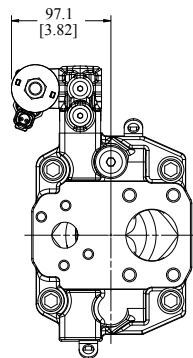

P108 457E

Displacement limiter

Series 45 F90C and F74B open circuit pumps are available with an optional adjustable displacement limiter. This adjustable stop limits the pump's maximum displacement.

Setting range


| | |
|------|--|
| F90C | 45.6 to 90 cm ³ [2.78 to 5.49 in ³] |
| F74B | 34.1 to 74 cm ³ [1.92 to 4.52 in ³] |

Frame F


Displacement per turn

| | |
|------|--|
| F90C | 6.8 cm ³ /rev [0.41 in ³ /rev] |
| F74B | 6.1 cm ³ /rev [0.37 in ³ /rev] |

Displacement limiter cross-section

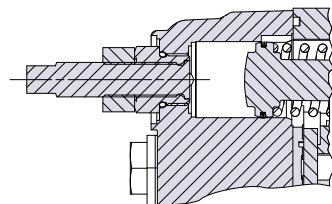

P104 345

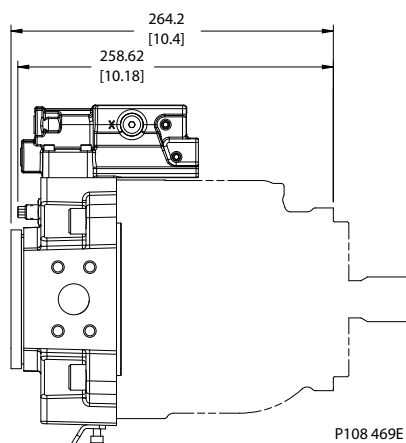

P108 469E


Frame E

Design

Series 45 Frame E pumps have a single servo piston design with a cradle-type swashplate set in polymer-coated journal bearings. A bias spring and internal forces increase swashplate angle. The servo piston decreases swashplate angle. Nine reciprocating pistons displace fluid from the pump inlet to the pump outlet as the cylinder block rotates on the pump input shaft. The block spring holds the piston slippers to the swashplate via the slipper retainer. The cylinder block rides on a bi-metal valve plate optimized for high volumetric efficiency and low noise. Tapered roller bearings support the input shaft and a viton lip seal protects against shaft leaks.

An adjustable one spool (PC only, not shown) or two spool (LS and PC) control senses system pressure and load pressure (LS controls). The control ports system pressure to the servo piston to control pump output flow.

Frame E cross section

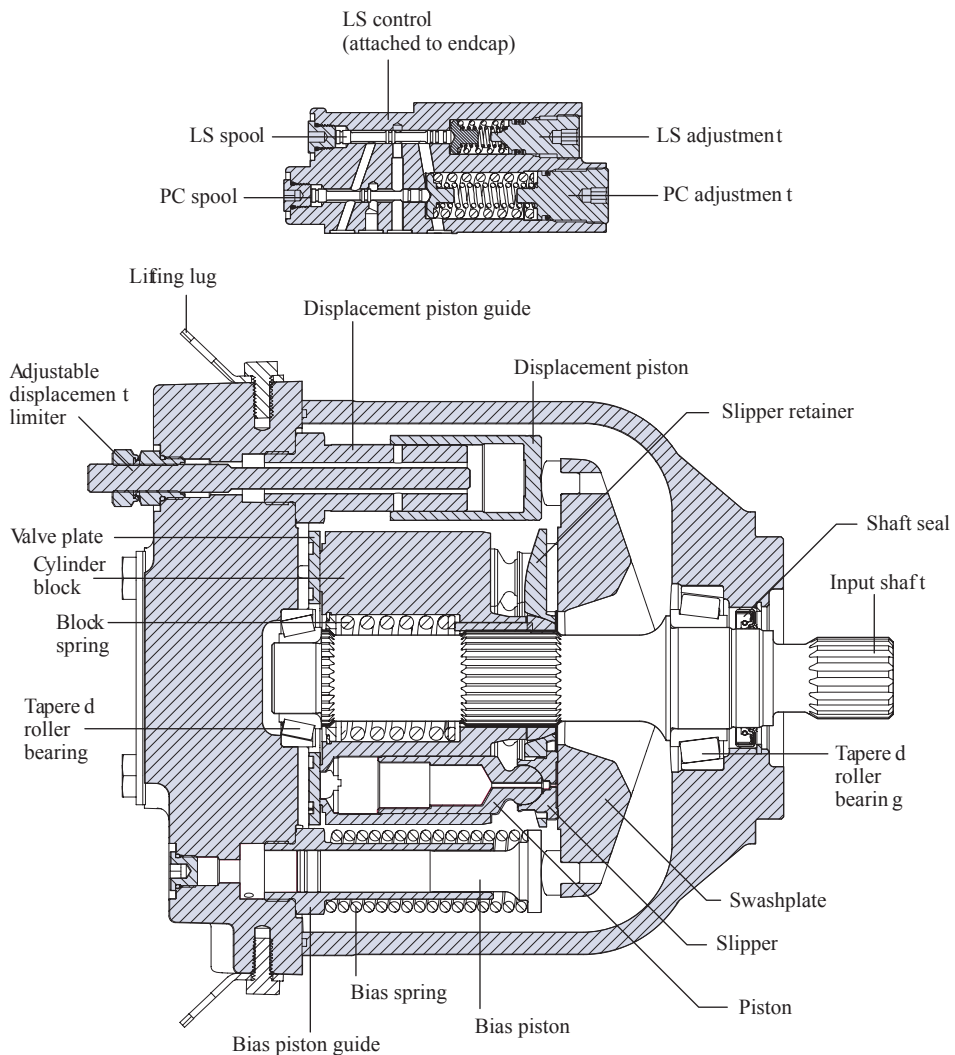

P104001

Frame E

Technical Specifications

| | | E Frame | | | |
|---|-----------------------------|--|---------------------|---------------------|---------------------|
| | | Unit | 100B | 130B | 147C |
| Maximum Displacement | | cm ³ [in ³] | 100 [6.1] | 130 [7.93] | 147 [8.97] |
| Working Input Speed | Minimum | min -1 (rpm) | 500 | 500 | 500 |
| | Continuous | | 2450 | 2200 | 2100 |
| | Maximum | | 2880 | 2600 | 2475 |
| Working Pressure | Continuous | bar [psi] | 310 [4500] | 310 [4500] | 260 [3770] |
| | Maximum | | 400 [5800] | 400 [5800] | 350 [5075] |
| Flow at rated speed (theoretical) | | l/min [US gal/min] | 245 [64.7] | 286 [75.6] | 309 [81.6] |
| Input torque at maximum displacement (theoretical) at 49° C [120°F] | | N•m/bar [lbf•in/1000 psi] | 1.592 [972] | 2.07 [1263.6] | 2.341 [1428.8] |
| Mass moment of inertia of internal rotating components | | kg•m ² [slug•ft ²] | 0.0128 [0.00944] | 0.0128 [0.00944] | 0.0128 [0.00944] |
| Weight | Axial ports | kg [lb] | 51.3 [113] | | |
| | Radial ports | | 54.9 [121] | | |
| External Shaft Loads | External moment (Me) | N•m [lbf•in] | 455 [4027] | 360 [3186] | 396 [3505] |
| | Thrust in (Tin), out (Tout) | N [lbf] | 2846 [640] | 1735 [390] | 2113 [475] |
| Mounting flange load moments | Vibratory (continuous) | N•m [lbf•in] | 1920 [17000] | | |
| | Shock (maximum) | | 6779 [60000] | | |

Order code

Code description

| Code | Description |
|------|--|
| R | Product Frame, Variable Open Circuit Pump |
| S | Rotation |
| P | Displacement |
| C | Control Type |
| D | Pressure Compensator Setting |
| E | Load Sense Setting |
| F | Not Used |
| G | Choke Orifice |
| H | Gain Orifice |
| J | Input Shaft/Auxiliary Mount/Endcap |
| K | Shaft Seal/Front Mounting Flange/Housing Ports |
| L | Displacement Limiter |
| M | Special Hardware |
| N | Special Features |

Frame E

R Product

| | | E Frame | | |
|----|--|---------|------|------|
| | | 100B | 130B | 147C |
| ER | E Frame, variable displacement open circuit pump | • | • | • |

S Rotation

| | | | | |
|---|------------------------------|---|---|---|
| L | Left Hand (counterclockwise) | • | • | • |
| R | Right Hand (clockwise) | • | • | • |

P Displacement

| | | | | |
|------|--|---|---|---|
| 100B | 100 cm ³ /rev [6.10 in ³ /rev] | • | | |
| 130B | 130 cm ³ /rev [7.93 in ³ /rev] | | • | |
| 147C | 147 cm ³ /rev [8.97 in ³ /rev] | | | • |

C Control type

| | | 100B | 130B | 147C |
|-----|---|------|------|------|
| PC | Pressure Compensator | • | • | • |
| BC* | Pressure Compensator [>280 bar] | • | • | |
| RP | Remote Pressure Compensator | • | • | • |
| BP* | Remote Pressure Compensator [>280 bar] | • | • | |
| FM* | Load Sensing/Pressure Comp. (NO, 24VDC) Left | • | • | • |
| LS | Load Sensing/Pressure Comp. | • | • | • |
| BS* | Load Sensing/Pressure Comp. [>280 bar] | • | • | |
| LB | Load Sensing/Pressure Comp. with internal bleed orifice | • | • | • |
| BB* | Load Sensing/Pressure Comp. with internal bleed orifice [>280 bar] | • | • | |
| AN | Electric On/Off w/Pressure Comp. (NO, 12VDC) Left | • | • | • |
| CN | Electric On/Off w/Pressure Comp. (NO, 24VDC) Left | • | • | • |
| AR | Electric On/Off w/Pressure Comp. (NC, 12VDC) Left | • | • | • |
| CR | Electric On/Off w/Pressure Comp. (NC, 24VDC) Left | • | • | • |
| AF | Electric On/Off w/Pressure Comp. (NO, 12VDC) Right | • | • | • |
| AT | Electric On/Off w/Pressure Comp. (NO, 24VDC) Right | • | • | • |
| AG | Electric On/Off w/Pressure Comp. (NC, 12VDC) Right | • | • | • |
| AY | Electric On/Off w/Pressure Comp. (NC, 24VDC) Right | • | • | • |
| BN* | Electric On/Off w/Pressure Comp. (NO, 12VDC) [>280 bar] Left | • | • | |
| DN* | Electric On/Off w/Pressure Comp. (NO, 24VDC) [>280 bar] Left | • | • | |
| BR* | Electric On/Off w/Pressure Comp. (NC, 12VDC) [>280 bar] Left | • | • | |
| DR* | Electric On/Off w/Pressure Comp. (NC, 24VDC) [>280 bar] Left | • | • | |
| BF* | Electric On/Off w/Pressure Comp. (NO, 12VDC) [>280 bar] Right | • | • | |
| DF* | Electric On/Off w/Pressure Comp. (NO, 24VDC) [>280 bar] Right | • | • | |
| BE* | Electric On/Off w/Pressure Comp. (NC, 12VDC) [>280 bar] Right | • | • | |
| BG* | Electric On/Off w/Pressure Comp. (NC, 24VDC) [>280 bar] Right | • | • | |
| AX | Electric Proportional Pressure Control w/Pressure Comp. (NO,12VDC) Left | • | • | • |
| CL | Electric Proportional Pressure Control w/Pressure Comp. (NO,24VDC) Left | | • | • |

Frame E

C Control type (continued)

| | | 100B | 130B | 147C |
|-----|--|-------------|-------------|-------------|
| AH | Electric Proportional Pressure Control w/Pressure Comp. (NC,12VDC) Left | • | • | • |
| AL | Electric Proportional Pressure Control w/Pressure Comp. (NC,24VDC) Left | • | • | • |
| AW | Electric Proportional Pressure Control w/Pressure Comp. (NO,12VDC) Right | • | • | • |
| CK | Electric Proportional Pressure Control w/Pressure Comp. (NO,24VDC) Right | • | • | • |
| AV | Electric Proportional Pressure Control w/Pressure Comp. (NC,12VDC) Right | • | • | • |
| AK | Electric Proportional Pressure Control w/Pressure Comp. (NC,24VDC) Right | • | • | • |
| BX* | Electric Proportional Pressure Control w/Pressure Comp. (NO,12VDC) [>280 bar] Left | • | • | |
| DL* | Electric Proportional Pressure Control w/Pressure Comp. (NO,24VDC) [>280 bar] Left | • | • | |
| BH* | Electric Proportional Pressure Control w/Pressure Comp. (NC,12VDC) [>280 bar] Left | • | • | |
| BL* | Electric Proportional Pressure Control w/Pressure Comp. (NC,24VDC) [>280 bar] Left | • | • | |
| BW* | Electric Proportional Pressure Control w/Pressure Comp. (NO,12VDC) [>280 bar] Right | • | • | |
| DK* | Electric Proportional Pressure Control w/Pressure Comp. (NO,24VDC) [>280 bar] Right | • | • | |
| BM* | Electric Proportional Pressure Control w/Pressure Comp. (NC,12VDC) [>280 bar] Right | • | • | |
| BK* | Electric Proportional Pressure Control w/Pressure Comp. (NC,24VDC) [>280 bar] Right | • | • | |
| FA* | Electric On/Off Dump valve w/Pressure Comp. + Load Sense (NC, 12VDC) Right | • | • | • |
| FB* | Electric On/Off Dump valve w/Pressure Comp. + Load Sense (NC, 12VDC) Left | • | • | • |
| FE* | Electric On/Off Dump valve w/Pressure Comp. + Load Sense (NC, 24VDC), Left | • | • | • |
| TA | Electronic Torque Limiting Control w/Pressure Compensation/Load Sensing (NC, 12VDC), Left | • | • | • |
| TB | Electronic Torque Limiting Control w/Pressure Compensation/Load Sensing (NC, 24VDC), Left | • | • | • |
| TC | Electronic Torque Limiting Control w/Pressure Compensation/Load Sensing (NC, 12VDC), (>280bar) Left | • | • | • |
| TD | Electronic Torque Limiting Control w/Pressure Compensation/Load Sensing (NC, 12VDC), (>280bar) Left | • | • | • |
| TE | Electronic Torque Limiting Control w/Pressure Compensation/Load Sensing (NC, 12VDC), Right | • | • | • |
| TF | Electronic Torque Limiting Control w/Pressure Compensation/Load Sensing (NC, 24VDC), Right | • | • | • |
| TG | Electronic Torque Limiting Control w/Pressure Compensation/Load Sensing (NC, 12VDC), (>280bar) Right | • | • | • |
| TH | Electronic Torque Limiting Control w/Pressure Compensation/Load Sensing (NC, 24VDC), (>280bar) Right | • | • | • |

Left - E-Frame: CW Only, F-Frame: CW Only, J-frame: CW Axial, CCW Radial

Right - E-Frame: CCW Only, F-Frame: CCW Only, J-frame: CCW Axial, CW Radial

* Not available on 147cc pumps

Frame E

D PC setting (2 digit code, 10 bar increments)

| | | E Frame | | |
|---------|-----------------------------------|---------|------|------|
| | | 100B | 130B | 147C |
| Example | 25 = 250 bar (3625 psi) | | | |
| 10-26 | 100 to 260 bar [1450 to 3771 psi] | • | • | • |
| 27-28 | 270 to 280 bar [3916 to 4061 psi] | • | • | |
| 29-31 | 290-310 bar [4206 to 4496 psi] | • | • | |

E Load sensing setting (2 digit code, 1 bar increments)

| | | | | |
|---------|---|---|---|---|
| Example | 20 = 20 bar (290 psi) | | | |
| 10-34 | 10 to 34 bar [145 to 508 psi] | • | • | • |
| NN | Not applicable (pressure compensated only controls) | • | • | • |

F Not used

| | | | | |
|----|----------------|---|---|---|
| NN | Not applicable | • | • | • |
|----|----------------|---|---|---|

G Servo Control Orifice

| | | | | |
|---|-----------------|---|---|---|
| N | None (standard) | • | • | • |
| E | 0.8 mm diameter | • | • | • |
| F | 1.0 mm diameter | • | • | • |

H Gain Orifice

| | | | | |
|---|--|---|---|---|
| 3 | 1.0 mm diameter | • | • | • |
| C | 0.8 mm diameter Electronic Torque Limiting Control Orifice (with standard orifice) | • | • | • |

Additional LS signal line orifice size options are available for necessary system tuning requirements. Contact your Danfoss representative for further information.

J Input Shaft

| | |
|----|-------------------------|
| K5 | 1.5 inch straight keyed |
| S1 | 14 tooth 12/24 pitch |
| S2 | 17 tooth, 12/24 pitch |
| S4 | 13 tooth, 8/16 pitch |

Auxiliary Mount/Endcap Style

| Auxiliary Description | Endcap Style | Inlet Porting | Outlet Porting | Endcap Description | Code |
|-----------------------|--------------|---------------|----------------|--|------|
| None | Axial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2.5 inch port 0.5 inch threads) Outlet - Code 62 Split Flange Port 4 Bolt (1.25 inch port 0.5 inch threads) | NL |
| None | Axial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2.5 inch port M12 metric threads) Outlet - Code 62 Split Flange Port 4 Bolt (1.25 inch port M12 metric threads) | N1 |

Frame E

Auxiliary Mount/Endcap Style (continued)

| | | | | | |
|----------------------------------|--------|--------------|--------------|--|----|
| None | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2.5 inch port 0.5 inch threads) Outlet - Code 62 Split Flange Port 4 Bolt (1.25 inch port 0.5 inch threads) | NP |
| N1 Endcap Option | | | | | |
| Running Cover | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2.5 inch port 0.5 inch threads) Outlet - Code 62 Split Flange Port 4 Bolt (1.25 inch port 0.5 inch threads) | RP |
| SAE-A, 11 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2.5 inch port 0.5 inch threads) Outlet - Code 62 Split Flange Port 4 Bolt (1.25 inch port 0.5 inch threads) | TP |
| SAE-A, 9 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2.5 inch port 0.5 inch threads) Outlet - Code 62 Split Flange Port 4 Bolt (1.25 inch port 0.5 inch threads) | AP |
| SAE-B, 13 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2.5 inch port 0.5 inch threads) Outlet - Code 62 Split Flange Port 4 Bolt (1.25 inch port 0.5 inch threads) | BP |
| SAE-B, 14 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2.5 inch port 0.5 inch threads) Outlet - Code 62 Split Flange Port 4 Bolt (1.25 inch port 0.5 inch threads) | LP |
| SAE-BB, 13 teeth/with M12 thread | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2.5 inch port M12 metric threads) Outlet - Code 62 Split Flange Port 4 Bolt (1.25 inch port M12 metric threads) | U6 |
| SAE-BB, 15 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2.5 inch port 0.5 inch threads) Outlet - Code 62 Split Flange Port 4 Bolt (1.25 inch port 0.5 inch threads) | VP |
| SAE-C, 14 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2.5 inch port 0.5 inch threads) Outlet - Code 62 Split Flange Port 4 Bolt (1.25 inch port 0.5 inch threads) | CP |
| SAE-CC, 17 teeth | Radial | Split Flange | Split Flange | Inlet - Code 61 Split Flange Port 4 Bolt (2.5 inch port 0.5 inch threads) Outlet - Code 62 Split Flange Port 4 Bolt (1.25 inch port 0.5 inch threads) | WP |

J Input Shaft/Auxiliary Mount/Endcap

Available Combinations

| | E Frame | | |
|------|----------------|-------------|-------------|
| | 100B | 130B | 147C |
| K5AP | • | • | • |
| K5BP | • | • | • |
| K5CP | • | • | • |
| K5D7 | • | • | • |

Frame E

| | E Frame | | |
|------|---------|------|------|
| | 100B | 130B | 147C |
| K5NL | • | • | • |
| K5NP | • | • | • |
| K5RP | • | • | • |
| K5VP | • | • | • |
| S1AP | • | • | • |
| S1BP | • | • | • |
| S1CP | • | • | • |
| S1LP | • | • | • |
| S1NL | • | • | • |
| S1N1 | • | • | • |
| S1NP | • | • | • |
| S1RP | • | • | • |
| S1TP | • | • | • |
| S1VP | • | • | • |
| S2AP | • | • | • |

| | E Frame | | |
|------|---------|------|------|
| | 100B | 130B | 147C |
| S2BP | • | • | • |
| S2CP | • | • | • |
| S2NL | • | • | • |
| S2NP | • | • | • |
| S2RP | • | • | • |
| S2TP | • | • | • |
| S2VP | • | • | • |
| S2WP | • | • | • |
| S4AP | • | • | • |
| S4BP | • | • | • |
| S4CP | • | • | • |
| S4NL | • | • | • |
| S4NP | • | • | • |
| S4RP | • | • | • |
| S4U6 | • | • | • |
| S4TP | • | • | • |
| S4VP | • | • | • |
| S4WP | • | • | • |

K Shaft seal

| | | E Frame | | |
|---|----------------|---------|------|------|
| | | 100B | 130B | 147C |
| A | Single (Viton) | • | • | • |

Frame E

K Mounting flange and housing port style

| | | | | |
|---|---|---|---|---|
| 1 | SAE-C Flange 4-bolt/SAE O-ring boss ports | • | • | • |
|---|---|---|---|---|

K Angle Sensor Housing

| | | | | |
|---|---------------------------------------|---|---|---|
| R | Angle Sensor Housing, Right Hand Side | • | • | • |
|---|---------------------------------------|---|---|---|

L Displacement limiter

| | | | | |
|-----|--------------------------------------|---|---|---|
| NNN | None (plugged) | • | • | • |
| AAA | Adjustable, factory set at max angle | • | • | • |

M Special hardware

| | | | | |
|-----|-------------------------|---|---|---|
| NNN | None | • | • | • |
| ANS | Angle Sensor Swashplate | • | • | • |

N Special features


| | | | | |
|-----|------|---|---|---|
| NNN | None | • | • | • |
|-----|------|---|---|---|

Frame E


Performance E100B

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].


Flow vs. speed

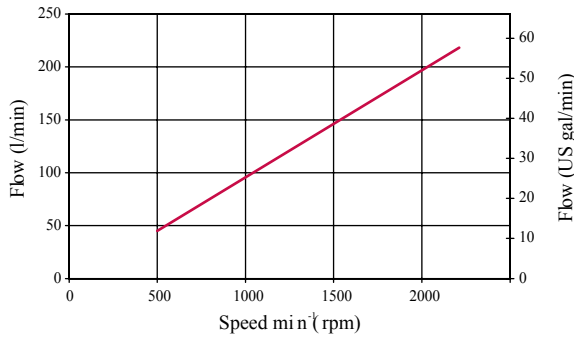


Input power vs. speed

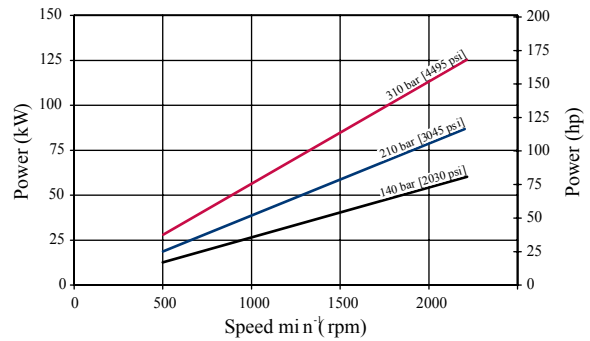


Efficiency

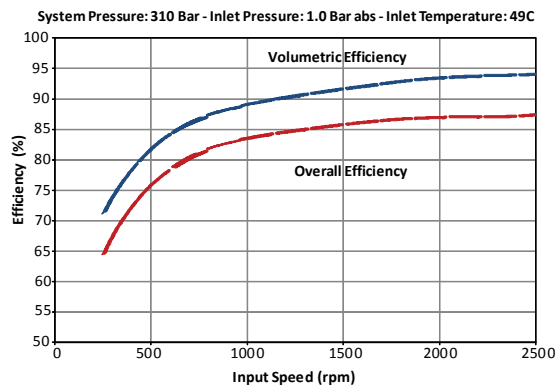

Noise

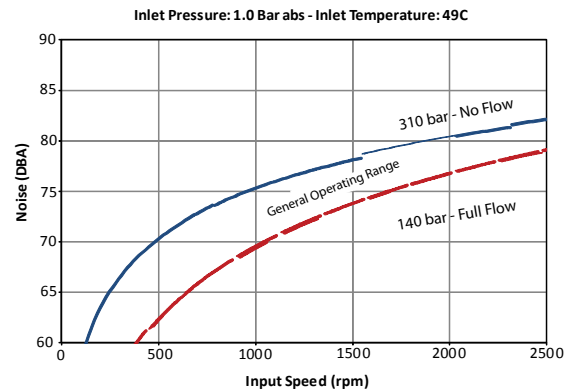

Inlet pressure vs. speed

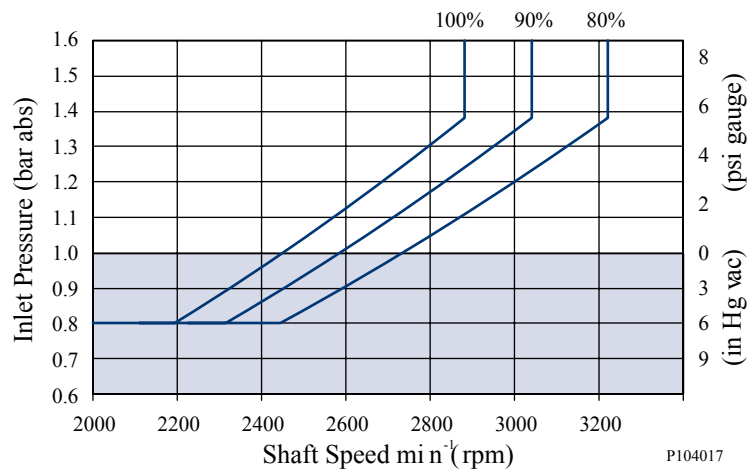

P104017


The chart above shows allowable inlet pressure and speed at various displacements. Greater speeds and lower inlet pressures are possible at reduced displacement. Operating outside of acceptable limits reduces pump life.

Frame E


Performance E130B

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].


Flow vs. speed

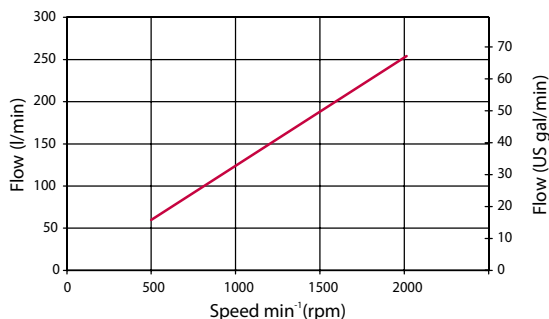


Input power vs. speed

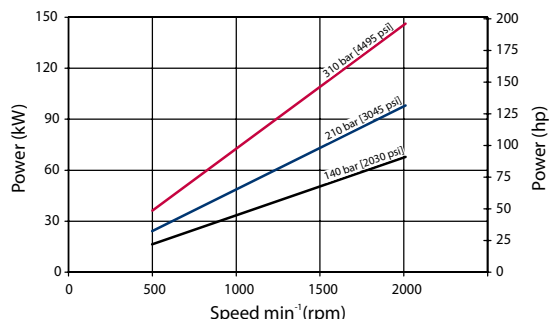


Efficiency

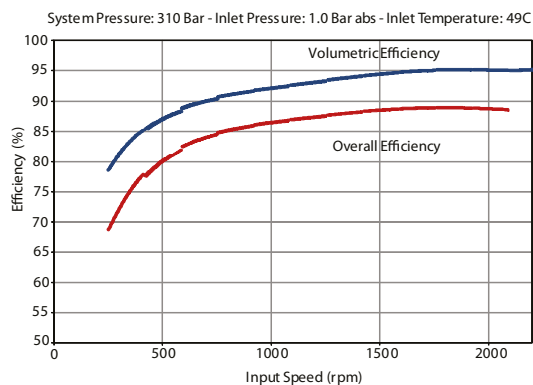

Noise

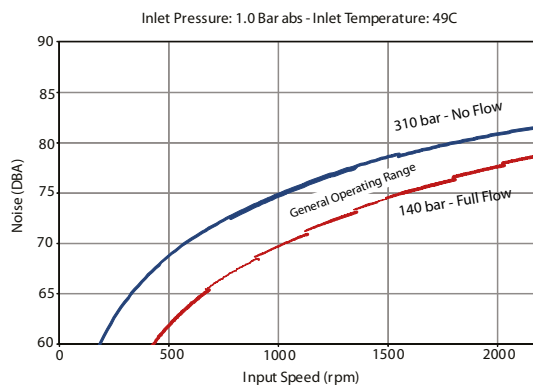

Inlet pressure vs. speed

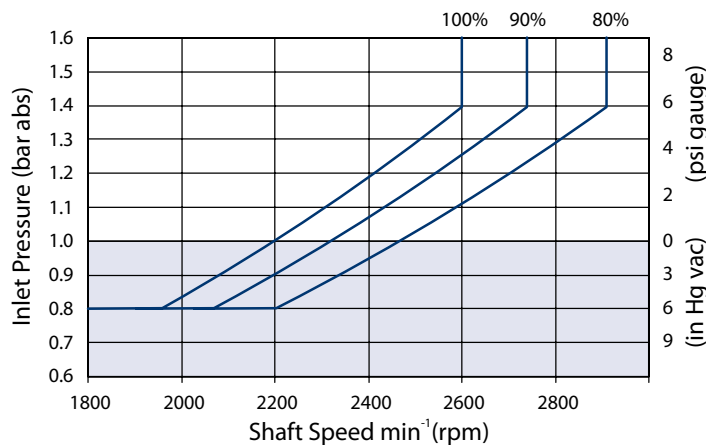

P109281


The chart above shows allowable inlet pressure and speed at various displacements. Greater speeds and lower inlet pressures are possible at reduced displacement. Operating outside of acceptable limits reduces pump life.

Frame E


Performance E147C

Flow and power data valid at 49°C [120°F] and viscosity of 17.8 mm²/sec [88 SUS].


Flow vs. speed

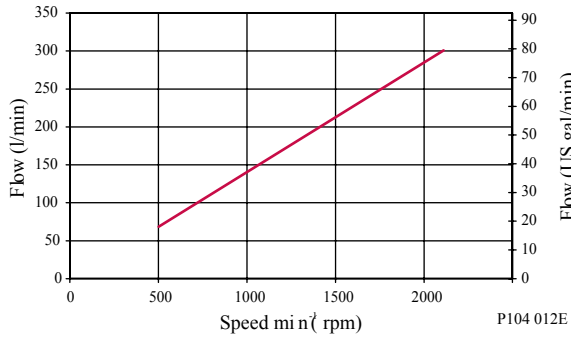


Input power vs. speed

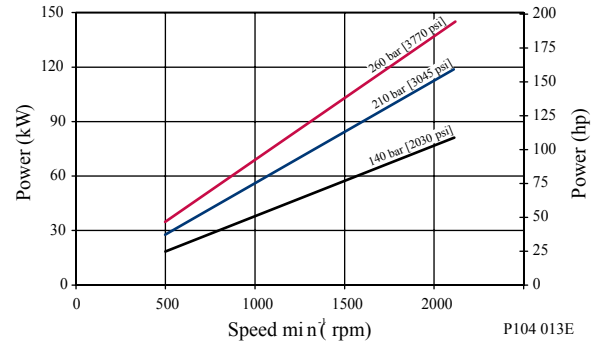


Efficiency

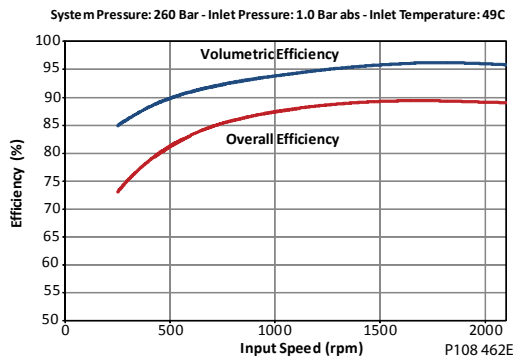

Noise

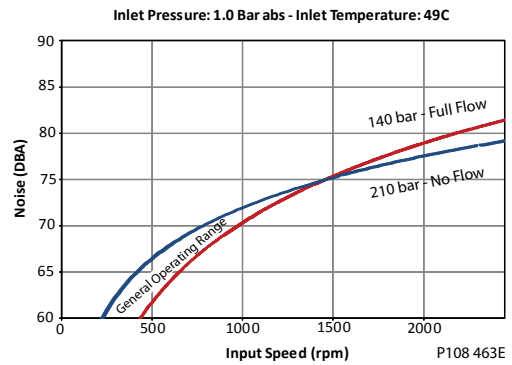

Inlet pressure vs. speed

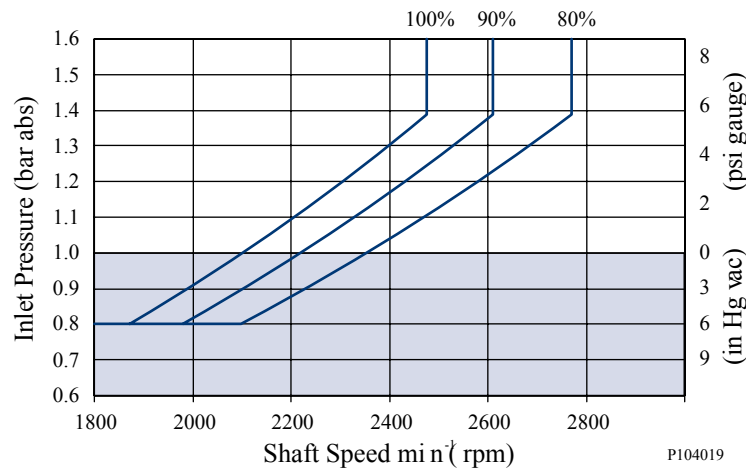

The chart above shows allowable inlet pressure and speed at various displacements. Greater speeds and lower inlet pressures are possible at reduced displacement. Operating outside of acceptable limits reduces pump life.

Frame E

Hydraulic Controls

Pressure Compensated Controls


Response/recovery times

| (ms) | Response | Recovery |
|-------|----------|----------|
| E100B | 45 | 175 |
| E130B | 55 | 175 |
| E147C | 60 | 190 |

PC Setting range

| Model | PC | BC |
|-------|--------------------------------|--------------------------------|
| E100B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| E130B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| E147C | 100-260 bar [1450-3770 psi] | N/A |

Schematic

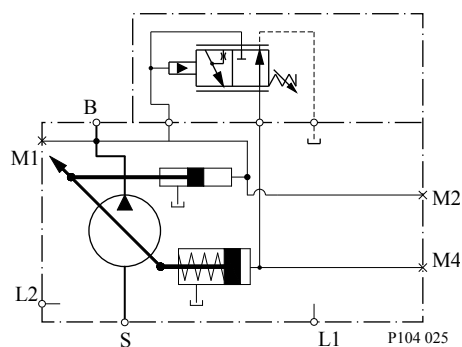

B = Outlet

S = Inlet

L1, L2 = Case drain

M2 = System pressure gauge port

M4 = Servo pressure gauge port

Remote Pressure Compensated Controls

Response/recovery times


| (ms) | Response | Recovery |
|-------|----------|----------|
| E100B | 45 | 175 |
| E130B | 55 | 175 |
| E147C | 60 | 190 |

Frame E

PC Setting range

| Model | RP | BP |
|-------|--------------------------------|--------------------------------|
| E100B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| E130B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| E147C | 100-260 bar [1450-3770 psi] | N/A |

Schematic

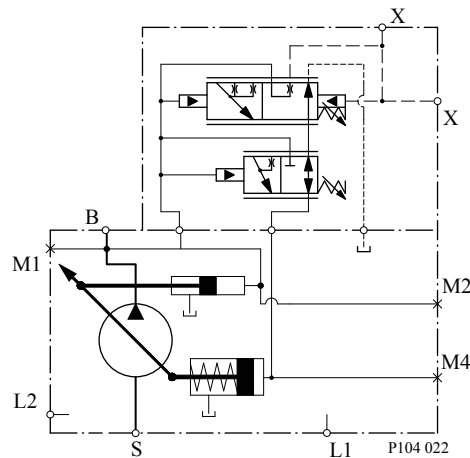

- B = Outlet
- S = Inlet
- L1, L2 = Case drain
- M2 = System pressure gauge port
- M4 = Servo pressure gauge port
- X = Remote PC port

Load Sensing/Pressure Compensated

Response/recovery times

| (ms) | Response | Recovery |
|-------|----------|----------|
| E100B | 45 | 200 |
| E130B | 50 | 200 |
| E147C | 60 | 200 |

PC Setting range


| Model | LS | BS |
|-------|--------------------------------|--------------------------------|
| E100B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| E130B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| E147C | 100-260 bar [1450-3770 psi] | N/A |

Frame E

LS setting range

| Model | bar | psi |
|-------|-------|---------|
| All | 10–30 | 145–435 |

Schematic

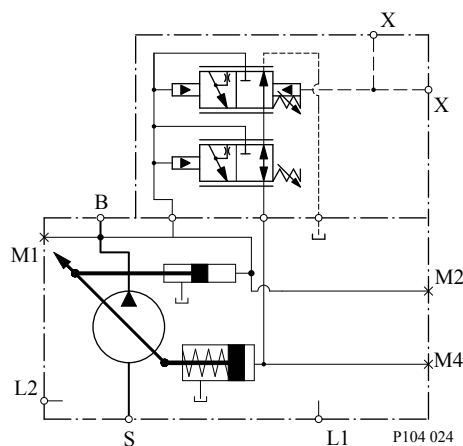

- B = Outlet
- S = Inlet
- L1, L2 = Case drain
- M2 = System pressure gauge port
- M4 = Servo pressure gauge port
- X = LS signal port

Load Sensing Control with Bleed Orifice/Pressure Compensated

*Response/recovery times**

| (msec) | Response | Recovery |
|--------|----------|----------|
| E100B | 45 | 200 |
| E130B | 50 | 200 |
| E147C | 60 | 200 |

PC setting range


| Model | LB | BB |
|-------|--------------------------------|--------------------------------|
| E100B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| E130B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| E147C | 100-260 bar [1450-3770 psi] | N/A |

LS setting range

| Model | bar | psi |
|-------|-------|---------|
| All | 10–34 | 145–435 |

Frame E

Schematic

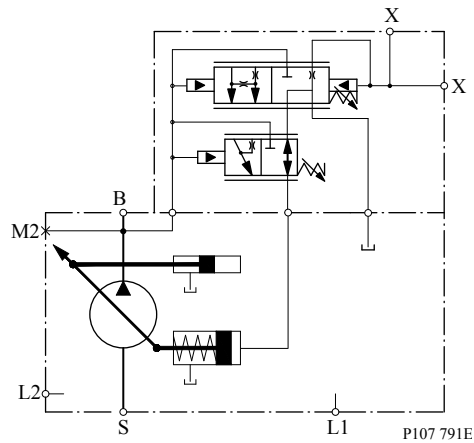


- B = Outlet
- S = Inlet
- L1, L2 = Case drain
- M2 = System pressure gauge port
- M4 = Servo pressure gauge port
- X = LS signal port

Electric Controls


Connectors

| Description | Quantity | Ordering Number |
|--------------------------------|----------|-------------------------|
| Mating Connector | 1 | Deutsch® DT06-2S |
| Wedge Lock | 1 | Deutsch® W25 |
| Socket Contact (16 and 18 AWG) | 2 | Deutsch® 0462-201-16141 |
| Danfoss mating connector kit | 1 | K29657 |



Frame E

Continuous Duty Operating Range

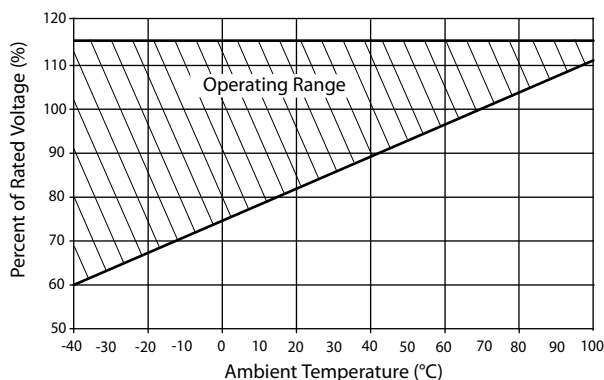

Solenoid Data - Normally Closed

| Voltage | 12V | 24V |
|---|---------|---------|
| Threshold Control [mA] (310/260 bar PC setting, oil temp X) | 200/400 | 100/200 |
| End Current [mA] (20 bar LS setting, oil temp X) | 1200 | 600 |

Solenoid Data - Normally Open

| Voltage | 12V | 24V |
|--|-----------|---------|
| Threshold Control [mA] (20 bar LS setting, oil temp X) | 0 | 0 |
| End Current [mA] (260/310 bar PC setting, oil temp X) | 1000/1100 | 500/550 |

Hysteresis

| Frame | Hysteresis |
|--------------|--|
| E100B, E130B | Input hysteresis <4% (control current): Output hysteresis <4.5% (system pressure) |
| E147C | Input hysteresis <4% (control current): Output hysteresis <4.5% (system pressure) |

Normally Closed Electric On/Off with Pressure Compensation Controls

*Response/Recovery times**


| (msec) | Response | Recovery |
|--------|----------|----------|
| E100B | 45 | 175 |
| E130B | 55 | 175 |
| E147C | 60 | 190 |

* Without servo control orifice

For fan-drive systems, and systems with motors, select an LS setting no less than 15 bar to enhance system stability. As the LS setting is reduced, the risk for system instability may be increased. A 20 bar LS setting is recommended as a starting point for all new applications.

Frame E

Schematic

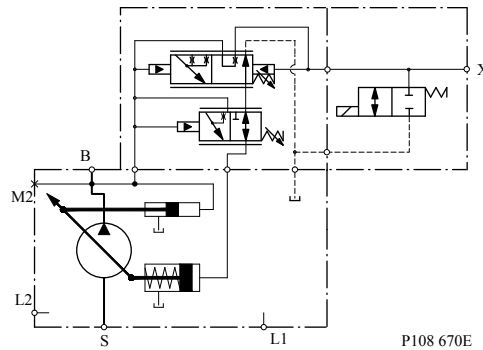

B = Outlet

S = Inlet

L1, L2 = Case drain

M2 = System pressure gauge port

X = Load Sense Port

LS setting range

| Model | bar | psi |
|-------|---------|-------------|
| All | 10 - 40 | [145 - 580] |

PC setting range

| Frame | AG, AR (12V) | BE, BR (12V) | AY, CR (24V) | BG, DR (24V) |
|-------|--------------------------------|-----------------|--------------------------------|-----------------|
| E100B | 100-280 bar | 290-310 bar | 100-280 bar | 290-310 bar |
| E130B | [1450-4060] psi | [4205-4495] psi | [1450-4060] psi | [4205-4495] psi |
| E147C | 100-260 bar [1450-3770] psi | Not Available | 100-260 bar [1450-3770] psi | Not Available |

Normally Open Electric On/Off with Pressure Compensation Controls

*Response/Recovery times**


| (msec) | Response | Recovery |
|--------|----------|----------|
| E100B | 45 | 175 |
| E130B | 55 | 175 |
| E147C | 60 | 190 |

* Without servo control orifice

For fan-drive systems, and systems with motors, select an LS setting no less than 15 bar to enhance system stability. As the LS setting is reduced, the risk for system instability may be increased. A 20 bar LS setting is recommended as a starting point for all new applications.

Frame E

Schematic

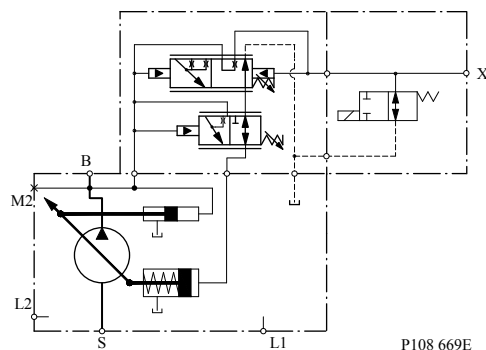

B = Outlet

S = Inlet

L1, L2 = Case drain

M2 = System pressure gauge port

X = Load Sense Port

LS setting range

| Model | bar | psi |
|-------|---------|-------------|
| All | 10 - 40 | [145 - 580] |

PC setting range

| Frame | AF, AN (12V) | BF, BN (12V) | AT, CN (24V) | DF, DN (24V) |
|-------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| E100B | 100-280 bar [1450-4060] psi | 290-310 bar [4205-4495] psi | 100-280 bar [1450-4060] psi | 290-310 bar [4205-4495] psi |
| E130B | | | | |
| E147C | 100-260 bar [1450-3770] psi | Not Available | 100-260 bar [1450-3770] psi | Not Available |

Normally Closed Electric Proportional with Pressure Compensation Controls

Response/Recovery times


| | 0.8mm Orifice | | 1.0mm Orifice | |
|--------|---------------|----------|---------------|----------|
| | Response | Recovery | Response | Recovery |
| (msec) | | | | |
| E100B | 45 | 530 | 45 | 405 |
| E130B | 55 | 530 | 55 | 405 |
| E147C | 60 | 580 | 60 | 440 |

LS setting range

| Model | bar | psi |
|-------|---------|-------------|
| All | 10 - 40 | [145 - 580] |

Frame E

Schematic

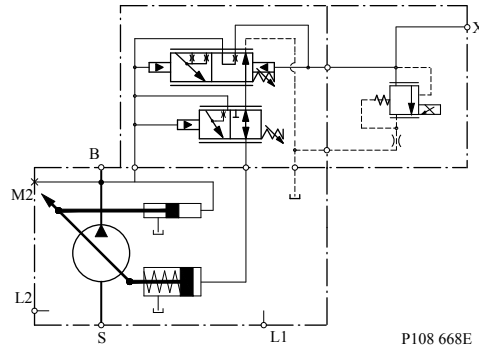

- B = Outlet
- S = Inlet
- L1, L2 = Case drain
- M2 = System pressure gauge port
- X = Load Sense Port


PC setting range

| Frame | AH, AV (12V) | BH, BM (12V) | AK, AL (24V) | BK, BL (24V) |
|-------|-----------------|-----------------|-----------------|-----------------|
| E100B | 100-280 bar | 290-310 bar | 100-280 bar | 290-310 bar |
| E130B | [1450-4060] psi | [4205-4495] psi | [1450-4060] psi | [4205-4495] psi |
| E147C | 100-260 bar | Not Available | 100-260 bar | Not Available |
| | [1450-3770] psi | | [1450-3770] psi | |

For fan-drive systems, and systems with motors, select an LS setting no less than 15 bar to enhance system stability. As the LS setting is reduced, the risk for system instability may be increased. A 20 bar LS setting is recommended as a starting point for all new applications.

Electric proportional controls have a unique relationship between margin (LS) setting and low pressure standby. See the graph below for this relationship.

**Frames E, F, J Electric Proportional Control
 Low Pressure Standby**

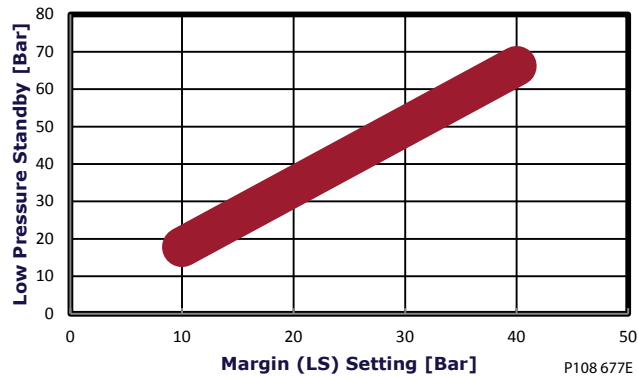

Frame E

Normally Open Electric Proportional with Pressure Compensation Controls


Response/Recovery times

| (msec) | 0.8mm Orifice | | 1.0mm Orifice | |
|--------|---------------|----------|---------------|----------|
| | Response | Recovery | Response | Recovery |
| E100B | 45 | 530 | 45 | 405 |
| E130B | 55 | 530 | 55 | 405 |
| E147C | 60 | 580 | 60 | 440 |

LS setting range

| Model | bar | psi |
|-------|---------|-------------|
| All | 10 - 40 | [145 - 580] |

Schematic

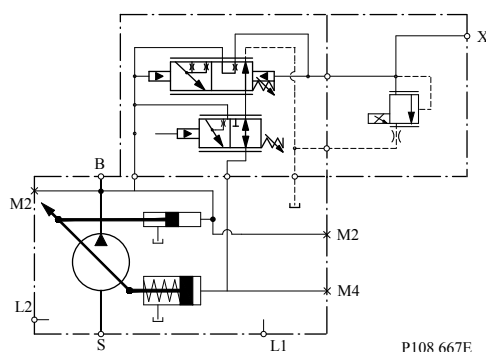

- B = Outlet
- S = Inlet
- L1, L2 = Case drain
- M2 = System pressure gauge port
- X = Load Sense Port

PC setting range


| Frame | AW, AX (12V) | BW, BX (12V) | CK, CL (24V) | DK, DL (24V) |
|-------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| E100B | 100-280 bar [1450-4060] psi | 290-310 bar [4205-4495] psi | 100-280 bar [1450-4060] psi | 290-310 bar [4205-4495] psi |
| E130B | | | | |
| E147C | 100-260 bar [1450-3770] psi | Not Available | 100-260 bar [1450-3770] psi | Not Available |

For fan-drive systems, and systems with motors, select an LS setting no less than 15 bar to enhance system stability. As the LS setting is reduced, the risk for system instability may be increased. A 20 bar LS setting is recommended as a starting point for all new applications.

Electric proportional controls have a unique relationship between margin (LS) setting and low pressure standby. See the graph below for this relationship.

Frame E

**Frames E, F, J Electric Proportional Control
Low Pressure Standby**

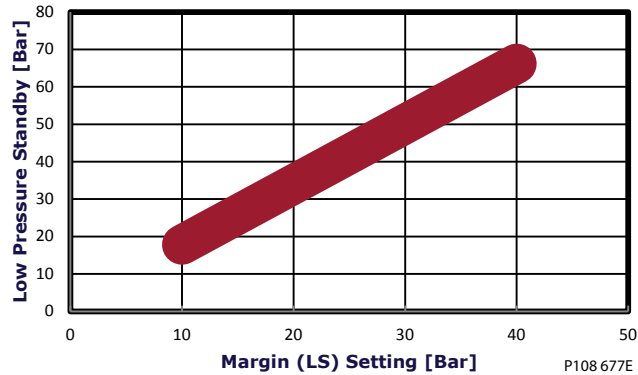


Normally Closed Electric Torque Limiting Control with Pressure Compensation Controls

Response/recovery times

| (ms) | Response | Recovery |
|-------|----------|----------|
| E100B | 45 | 200 |
| E130B | 50 | 200 |
| E147C | 60 | 200 |

Pin location



P200 151

Pinout

| Pin | Description |
|-----|------------------------------------|
| 1 | Supply - |
| 2 | Output signal 2 - Secondary Signal |
| 3 | Output signal 1 - Primary Signal |
| 4 | Supply + |

PC Setting range

| Frame | TA, TE (12Vdc) | TC, TG (12Vdc) | TB, TF (24Vdc) | TD, TH (24Vdc) |
|-------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| E100B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| E130B | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] | 100-280 bar [1450-4060 psi] | 290-310 bar [4205-4495 psi] |
| E147C | 100-260 bar [1450-3770 psi] | N/A | 100-260 bar [1450-3770 psi] | N/A |


Frame E

LS setting range

| Model | bar | psi |
|-------|---------|-------------|
| All | 10 - 40 | [145 - 580] |

For fan-drive systems, and systems with motors, select an LS setting no less than 15 bar to enhance system stability. As the LS setting is reduced, the risk for system instability may be increased. A 20 bar LS setting is recommended as a starting point for all new applications.

E-frame pump with integrated ETL control

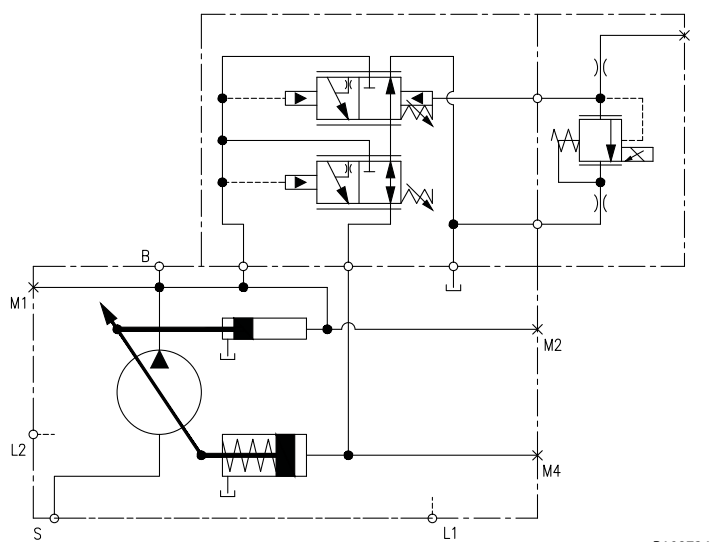

Frame E

Input shafts

Shaft data

| Code | Description | Maximum torque rating ¹ N·m [lbf·in] | Drawing |
|------|--|--|---|
| K5 | Ø 38.08 mm [1.5 in] Straight keyed | 1161 [10 270] | <p>9.525 [0.375] X 38.1 [1.5] LONG SQUARE KEY</p> <p>Ø38.075 ± 0.025 [1.5 ± 0.0009]</p> <p>Ø42.26 ± 0.125 [1.664 ± 0.005]</p> <p>54.0 ± 0.63 [2.13 ± 0.025]</p> <p>8 ± 0.8 [0.31 ± 0.03]</p> <p>COUPLING MUST NOT PROTRUDE BEYOND THIS POINT</p> <p>23.5 max. 16.5 min. 3.8 max. Dia. 11.18 M8x1.25-6H thd</p> <p>P104 037E</p> |
| S1 | 14-tooth spline 12/24 pitch (ANSI B92.1B 1996 - Class 5) | 800 [7080] | <p>Ø48.0 ± 0.55 [1.89 ± 0.022]</p> <p>Ø25.23 Max. [0.99]</p> <p>Ø31.14 ± 0.08 [1.226 ± 0.003]</p> <p>28 ± 0.15 [1.10 ± 0.059]</p> <p>8 ± 0.8 [0.31 ± 0.03]</p> <p>COUPLING MUST NOT PROTRUDE BEYOND THIS POINT</p> <p>14 TOOTH 12/24 PITCH 30° PRESSURE ANGLE 29.634 [1.167] PITCH Ø FILLET ROOT SIDE FIT COMPATIBLE WITH ANSI B92.1B-1996 CLASS 6e - ALSO MATES WITH FLAT ROOT SIDE FIT</p> <p>P104038</p> |
| S2 | 17-tooth spline 12/24 pitch (ANSI B92.1B 1996 - Class 5) | 1150 [10178] | <p>Ø30.75 [1.211] MAX</p> <p>Ø36.66 ± 0.08 [1.443 ± 0.003]</p> <p>34 ± 0.15 [1.339 ± 0.006]</p> <p>54.0 ± 0.55 [2.13 ± 0.022]</p> <p>8 ± 0.8 [0.31 ± 0.03]</p> <p>COUPLING MUST NOT PROTRUDE BEYOND THIS POINT</p> <p>17 TOOTH 12/24 PITCH 30° PRESSURE ANGLE 35.983 [1.417] PITCH DIA FILLET ROOT SIDE FIT COMPATIBLE WITH ANSI B92.1B-1996 CLASS 6e ALSO MATES WITH FLAT ROOT SIDE FIT</p> <p>P104036</p> |

1. See [Input shaft torque ratings](#) for an explanation of maximum torque.

Frame E


Shaft data

| Code | Description | Maximum torque rating ¹ N·m [lbf·in] | Drawing |
|------|---|--|--|
| S4 | 13-tooth spline 8/16 pitch (ANSI B92.1B 1996 - Class 5) | 1560 [13 807] | <p>13 TOOTH 8/16 PITCH 30° PRESSURE ANGLE 41.28 [1.625] PITCH DIA FILLET ROOT SIDE FIT COMPATIBLE WITH ANSI B92.1B-1996 CLASS 6e ALSO MATES WITH FLAT ROOT SIDE FIT</p> <p>Ø34.25 [1.348] MAX</p> <p>Ø43.94 ± 0.08 [1.73 ± 0.003]</p> <p>42 ± 0.15 [1.654 ± 0.006]</p> <p>67.0 ± 0.55 [2.64 ± 0.022]</p> <p>8 ± 0.8 [0.31 ± 0.03]</p> <p>P104035</p> <p>COUPLING MUST NOT PROTRUDE BEYOND THIS POINT</p> |

1. See [Input shaft torque ratings](#) for an explanation of maximum torque.


Installation drawings

Axial Ported Endcap

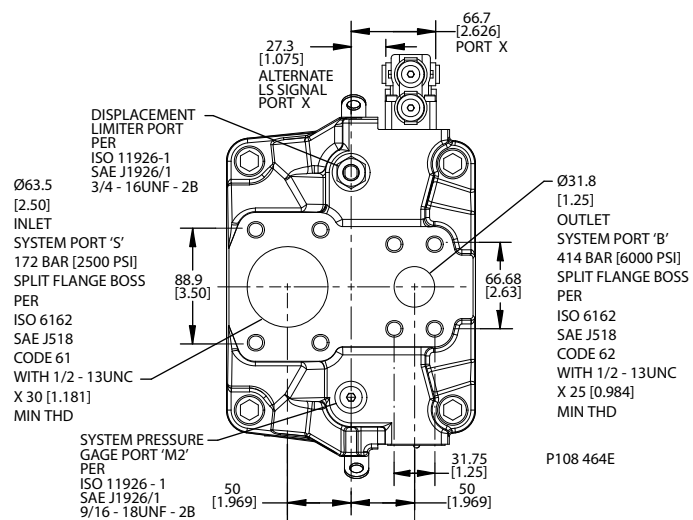


Frame E

Axial Ported Endcap Installation Dimensions

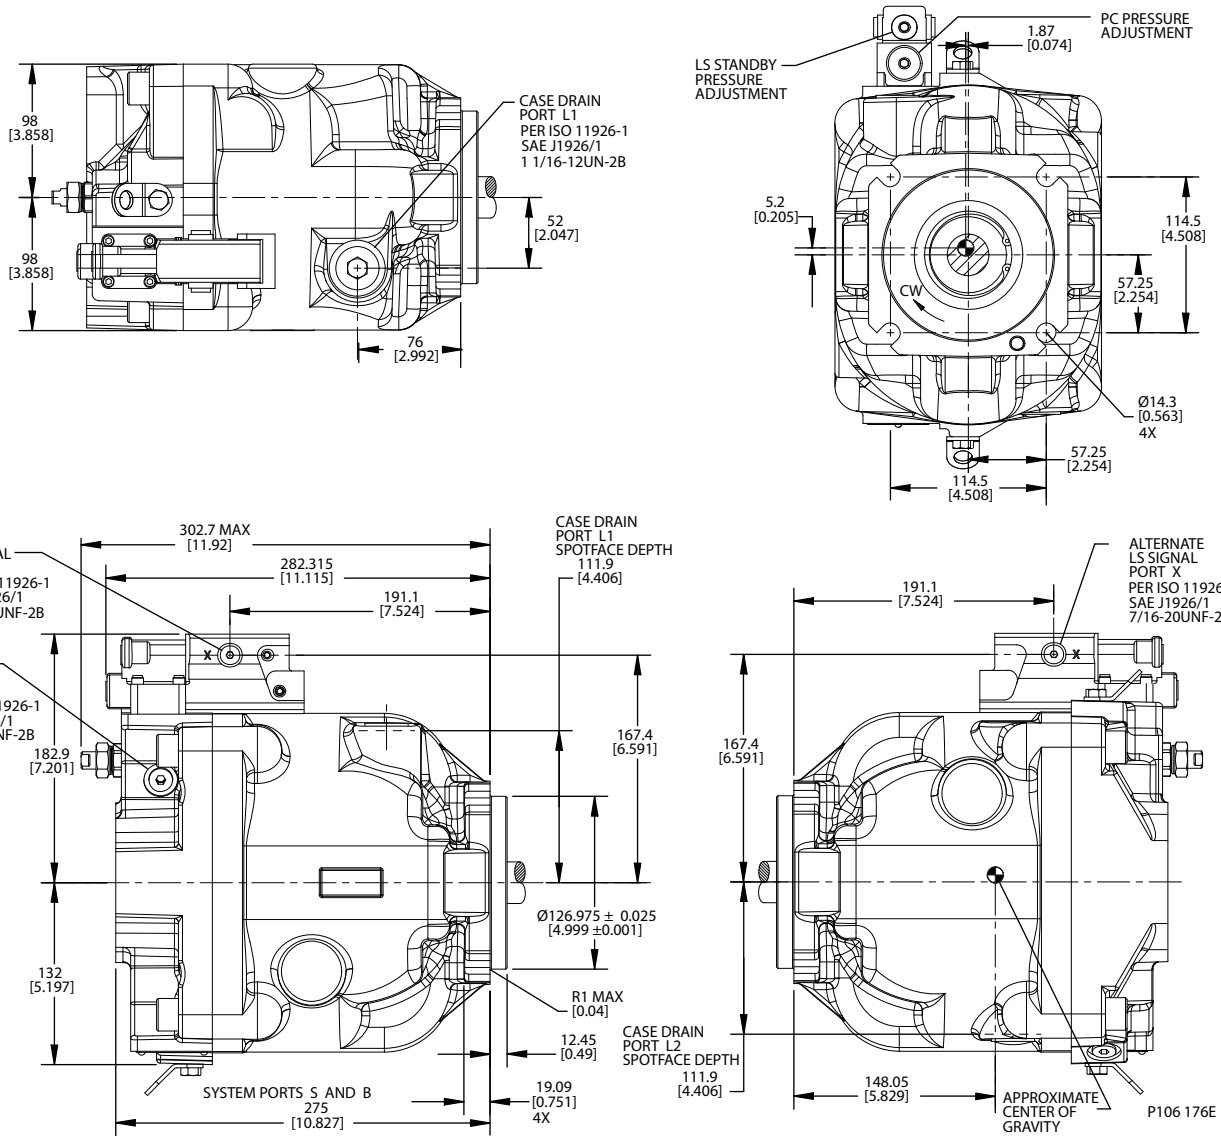

Frame E

Radial Ported Endcap Installation Dimensions

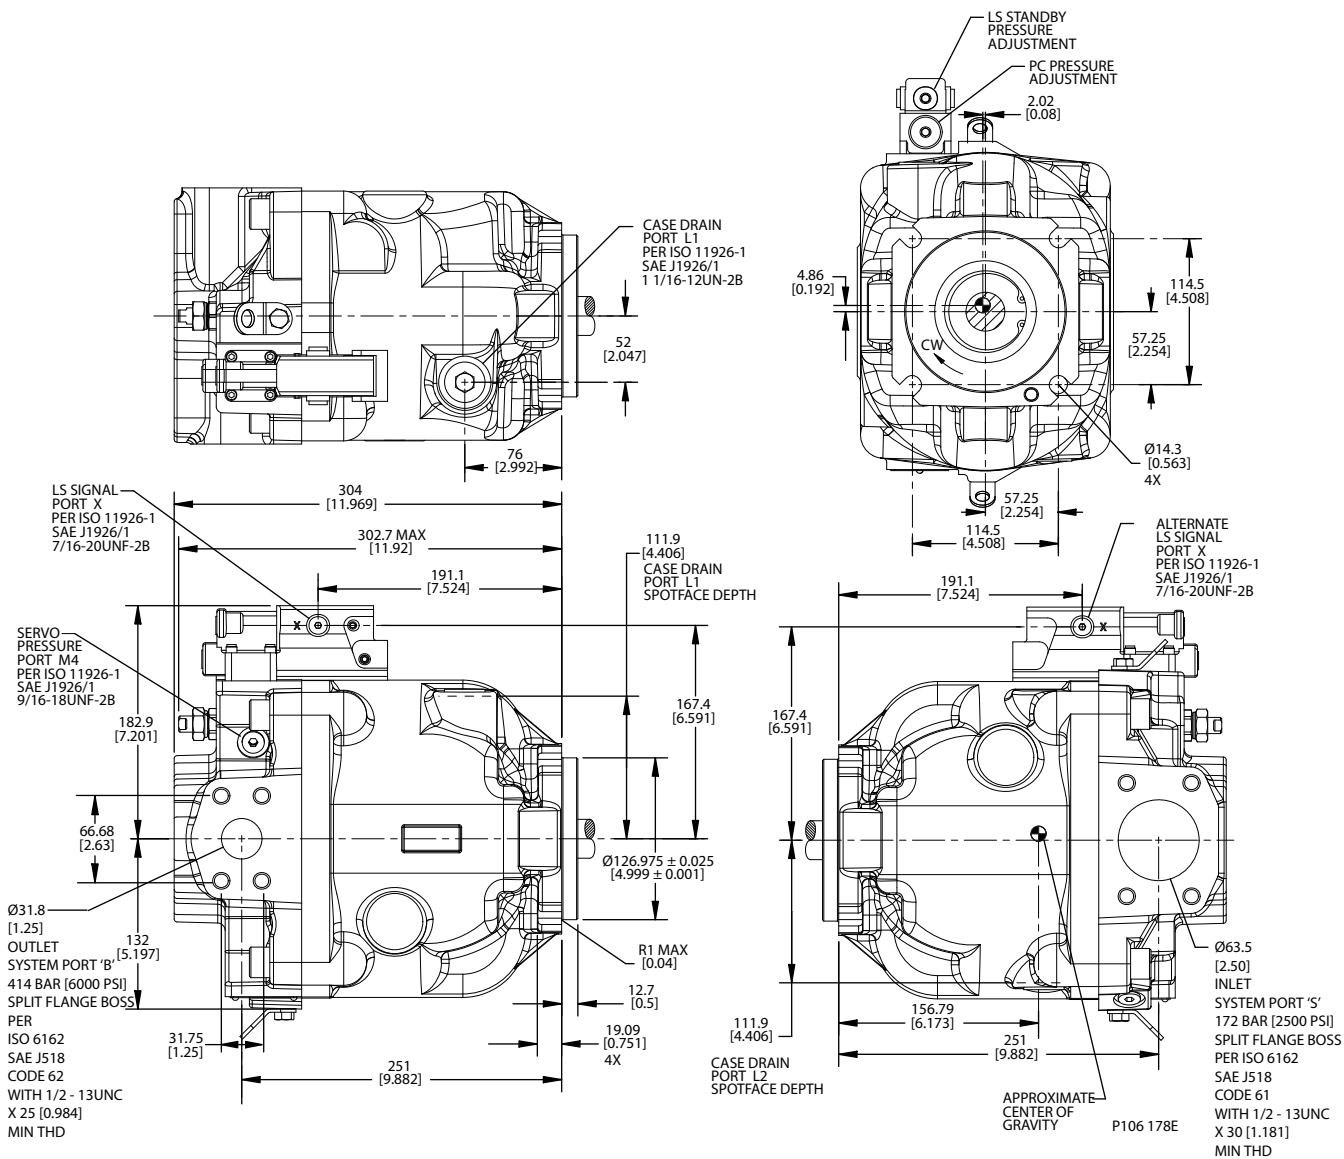


Frame E

Right Angle Sensor Position Installation Dimensions

The location convention for the E-Frame angle sensor is different from that of the J & F-Frame due to a difference in design of the endcap and servo systems. When looking at the input shaft, the angle sensor will be positioned on the same side as the outlet port of the endcap. The outlet port of the endcap is always the smaller of the inlet and outlet ports, indicated below. This is the 'right side' order code location, even though it appears on the left hand side from a frontal view.


Clockwise rotation E-frames appear with the control on the top side in this view. Counter-clockwise rotation E-Frames appear with the control on the bottom side in this view.

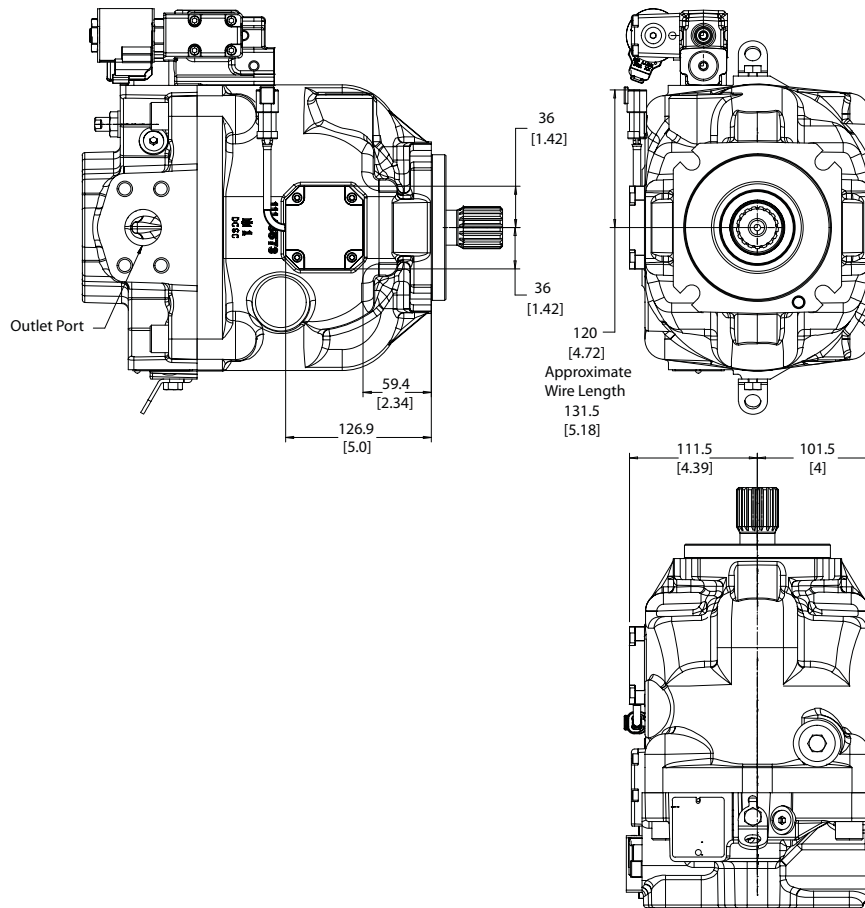


P108826

Frame E

Radial Ported Endcap Rear View

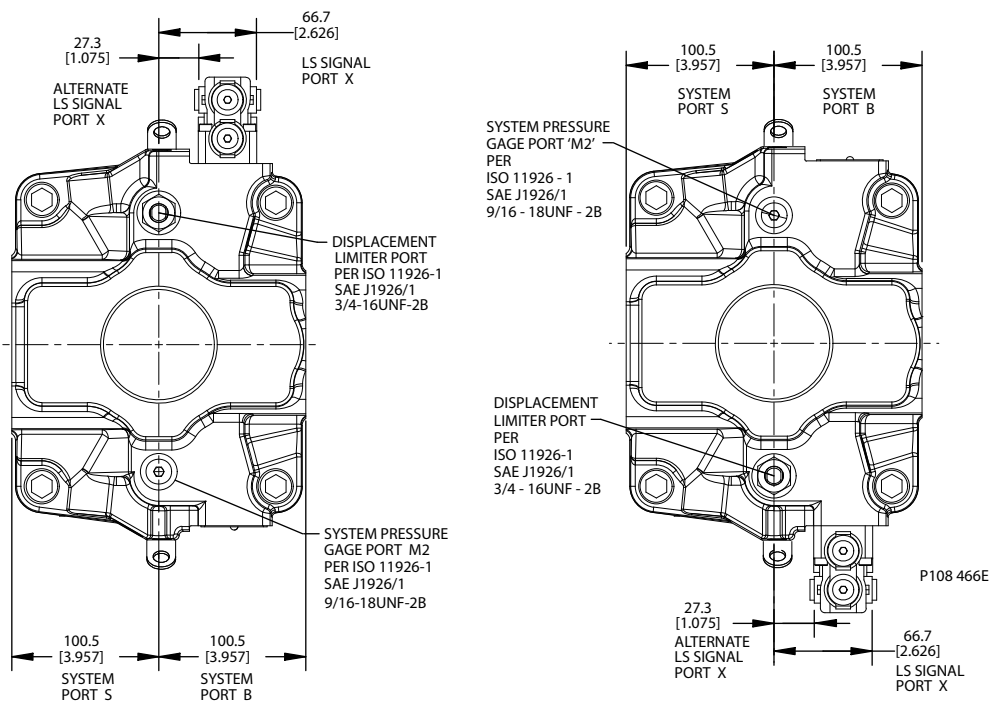


Radial Ported Endcap Split Flange Ports

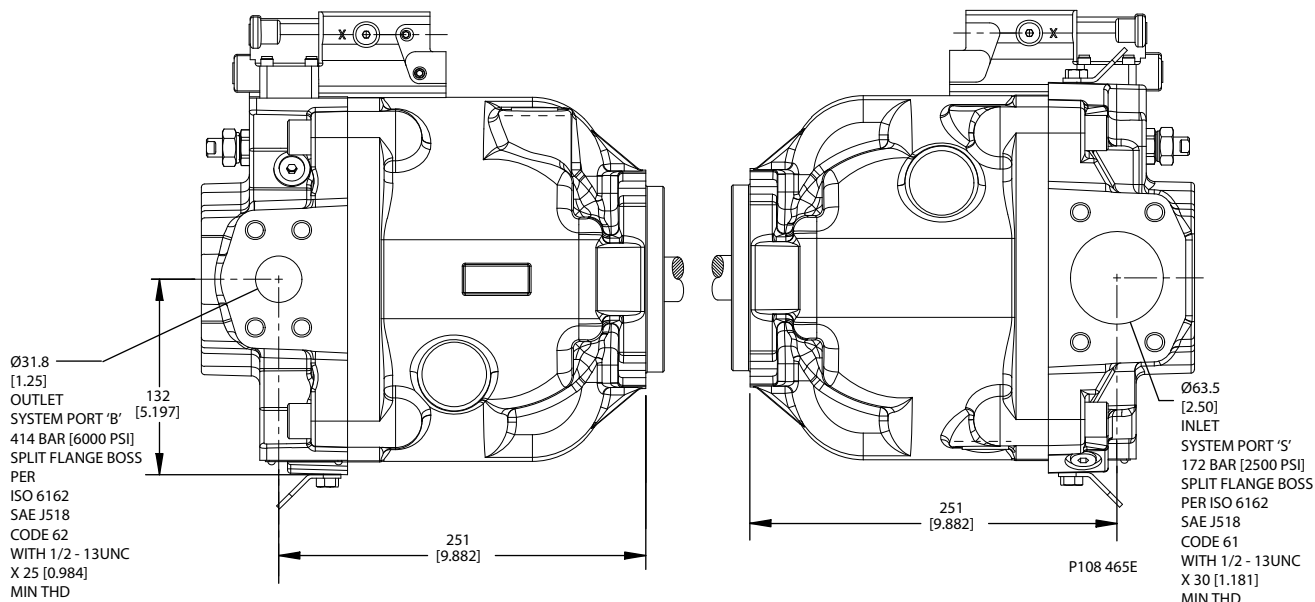

Frame E



Front Mounting Flange

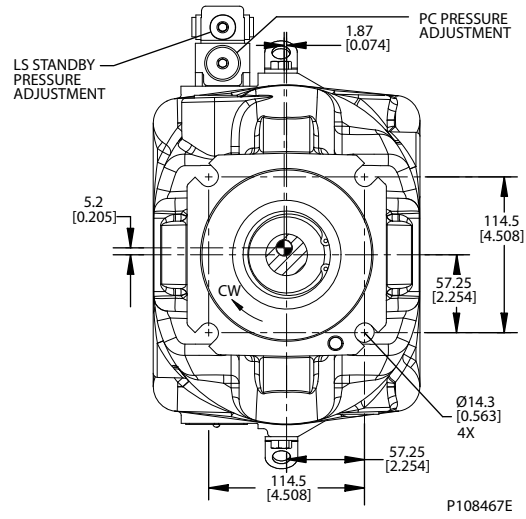



Frame E

Endcap Dimensions



Radial Endcap Clockwise

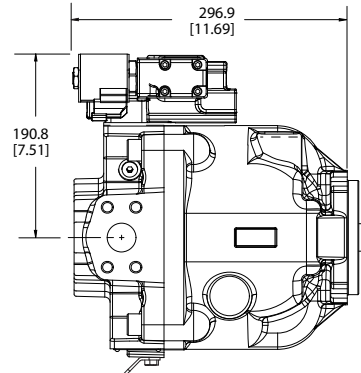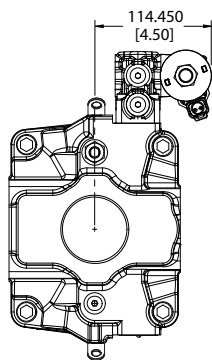



Radial Endcap Counterclockwise

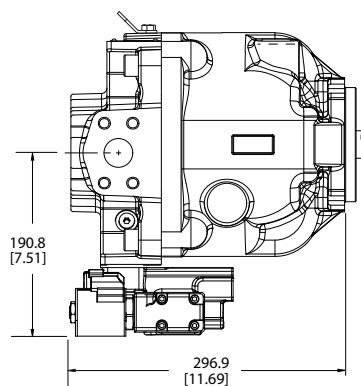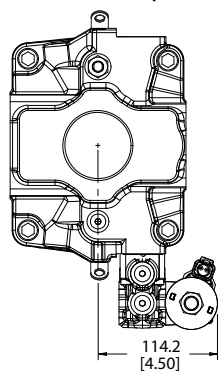

Axial Endcap Clockwise

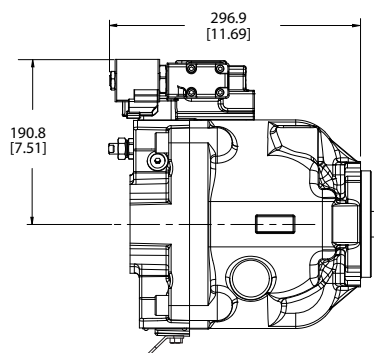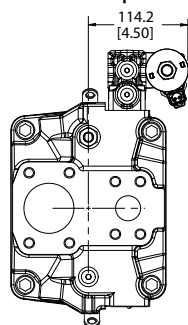


Axial Endcap Counterclockwise

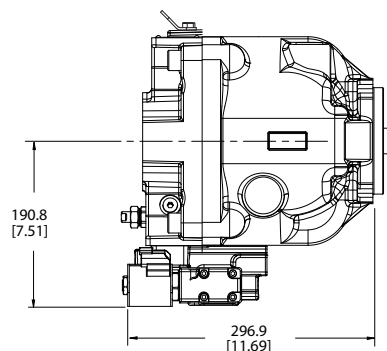

Frame E

Auxiliary mounting pads

SAE-A Dimensions

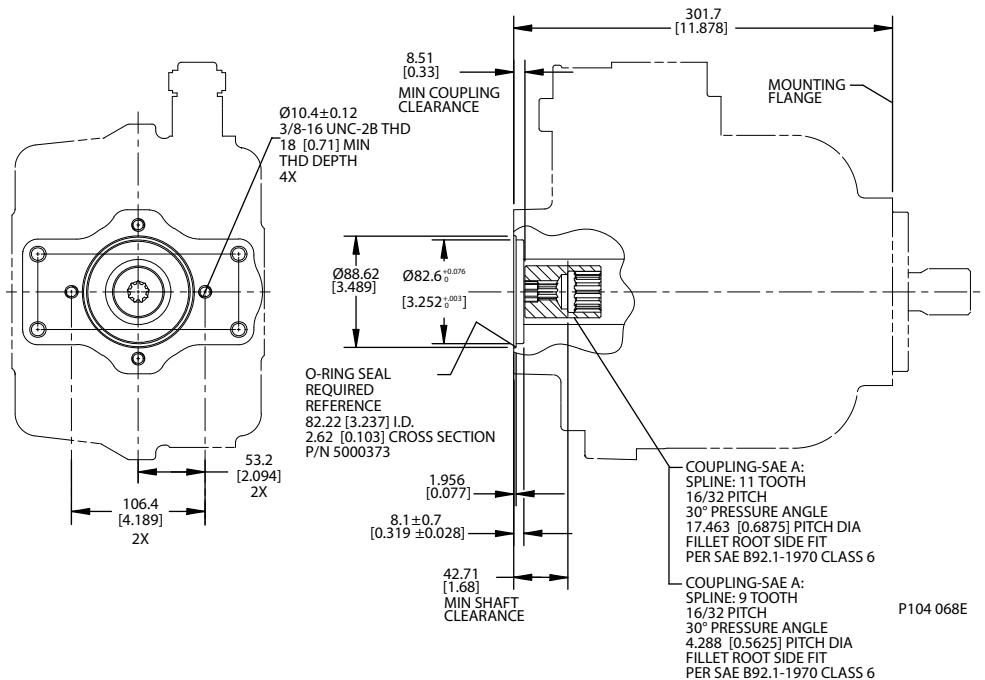


Specifications

| Coupling | 9-tooth | 11-tooth |
|---------------------------|----------------------|-----------------------|
| Spline minimum engagement | 13.5 mm [0.53 in] | 13.5 mm [0.53 in] |
| Maximum torque | 107 N•m [950 lbf•in] | 147 N•m [1300 lbf•in] |

Frame E

SAE-B Dimensions

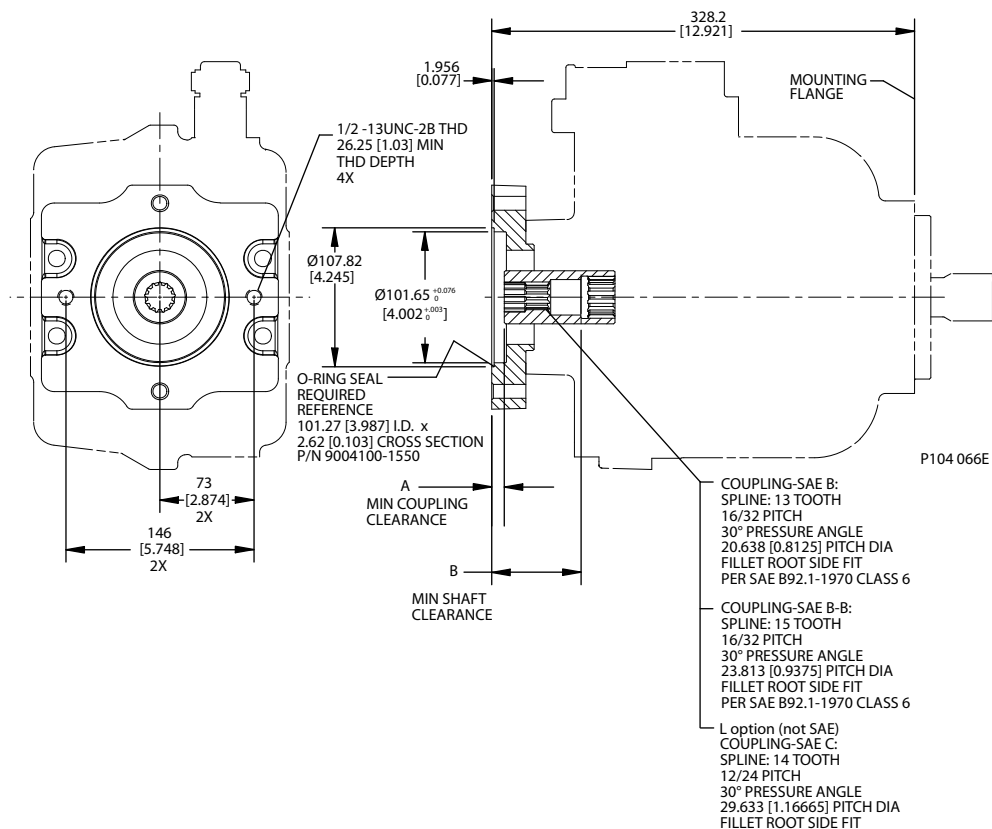


Specifications

| Coupling | 13 tooth | 15 tooth | 14 tooth |
|---------------------------|-----------------------|-----------------------|-----------------------|
| Spline Minimum Engagement | 14.2 [0.559] | 16.1 [0.634] | 18.3 [0.720] |
| Maximum Torque | 249 N·m [2200 lbf·in] | 339 N·m [3000 lbf·in] | 452 N·m [4000 lbf·in] |
| Dimension A | 9.21 [0.36] | 9.21 [0.36] | 32.11 [1.26] |
| Dimension B | 68.91 [2.71] | 68.91 [2.71] | 57.31 [2.256] |

Frame E

SAE-C Dimensions

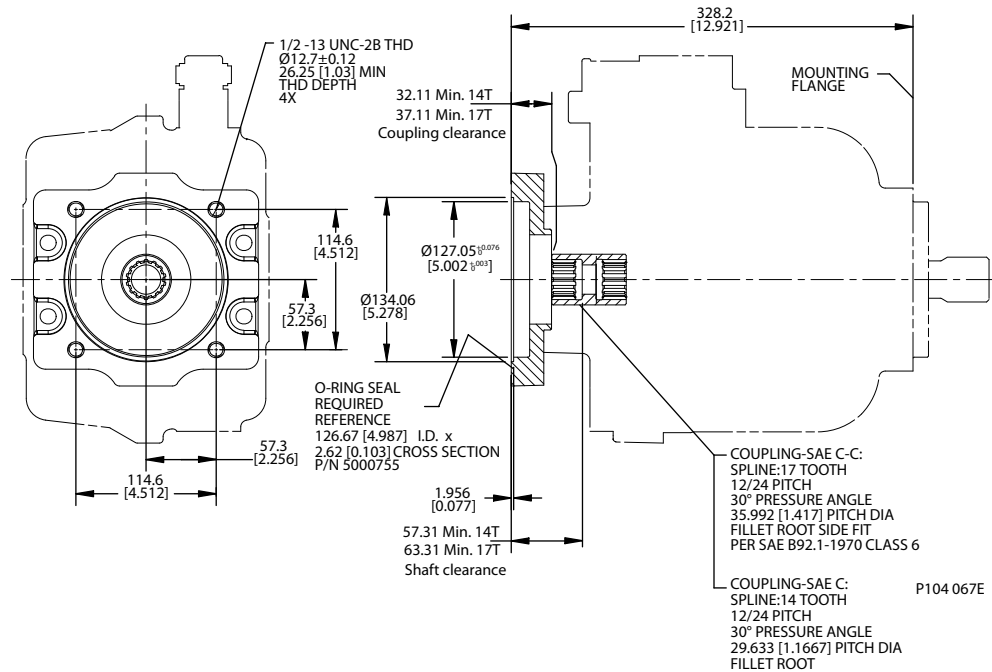

Specifications

| Coupling | 14-tooth | 17-tooth |
|---------------------------|-----------------------|-----------------------|
| Spline minimum engagement | 18.3 mm [0.72 in] | 18.3 mm [0.72 in] |
| Maximum torque | 452 N•m [4000 lbf•in] | 452 N•m [4000 lbf•in] |

Displacement Limiters

E Frame open circuit pumps are available with an optional adjustable displacement limiter. This adjustable stop limits the pump's maximum displacement.


Setting range

| | |
|-------|---|
| E100B | 40 to 100 cm ³ [2.44 to 6.1 in ³] |
| E130B | 70 to 130 cm ³ [4.27 to 7.93 in ³] |
| E147C | 87 to 147 cm ³ [5.31 to 8.97 in ³] |

Displacement per turn


| | |
|-------|--|
| E100B | 8.4 cm ³ /rev [0.51 in ³ /rev] |
| E130B | 8.4 cm ³ /rev [0.51 in ³ /rev] |
| E147C | 8.4 cm ³ /rev [0.51 in ³ /rev] |

Displacement limiter cross-section

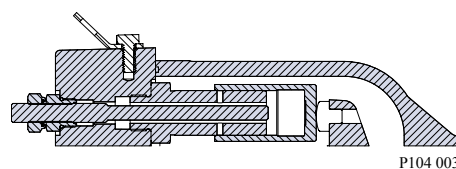

Frame E

Dimensions

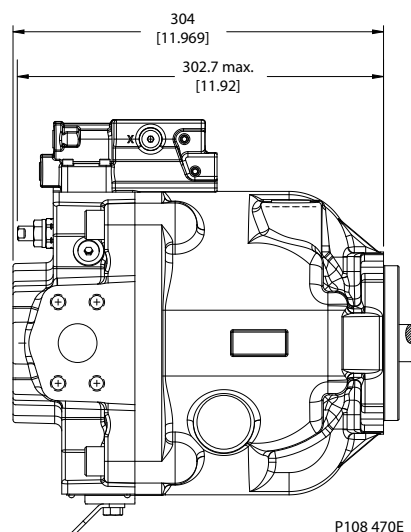

Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

Go to www.danfoss.com for further product information.

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

**Danfoss
Power Solutions (US) Company**
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

**Danfoss
Power Solutions GmbH & Co. OHG**
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

**Danfoss
Power Solutions ApS**
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

**Danfoss
Power Solutions Trading
(Shanghai) Co., Ltd.**
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 2080 6201

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.